

JOINT COMMITTEE ON ADMINISTRATIVE RULES

ILLINOIS GENERAL ASSEMBLY

CO-CHAIR:
SEN. BILL CUNNINGHAM

CO-CHAIR:
REP. RYAN SPAIN



700 STRATTON BUILDING
SPRINGFIELD, ILLINOIS 62706
(217) 785-2254

SEN. TERRI BRYANT
SEN. CRISTINA CASTRO
SEN. DONALD P. DeWITTE
SEN. NAPOLEON HARRIS, III
SEN. SALLY J. TURNER
REP. EVA-DINA DELGADO
REP. JACKIE HAAS
REP. STEVEN REICK
REP. CURTIS J. TARVER, II
REP. DAVE VELLA

June 16, 2026

Michelle Gibson, Chair
Pollution Control Board
60 E. Van Buren St., Ste. 630
Chicago IL 60605

Dear Chair Gibson:

This is to notify you that JCAR considered the following proposed rulemakings at its 6/16/26 meeting:

Organic Material Emission Standards and Limitations for the Metro-East Area (35 Ill. Adm. Code 219)
49 Ill. Adm. 8883 - 7/11/25

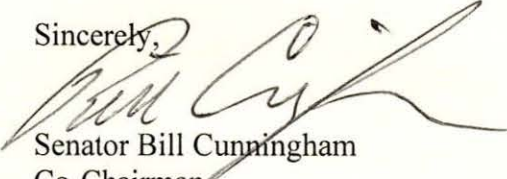
If your agency has agreed to any substantive modifications during its discussions with JCAR, they are described in the Agreements attached to the certification. Based on these Agreements, as well as the other responses you have provided the Committee during the review of these rulemakings, JCAR has determined that No Objection will be issued. Enclosed you will find formal certification of this action.


These rulemakings may now be adopted upon filing with the Office of the Secretary of State.

Please note that the fact that the Committee has not objected to these rulemakings does not necessarily constitute approval, expressed or implied, of the substance of the rulemakings.

Thank you for the cooperation your agency has shown during our review of these issues.

Sincerely,


Senator Bill Cunningham
Co-Chairman


Representative Ryan Spain
Co-Chairman

cc: Don Brown
Richard McGill
Enc.

JOINT COMMITTEE ON ADMINISTRATIVE RULES

ILLINOIS GENERAL ASSEMBLY

CO-CHAIR:
SEN. BILL CUNNINGHAM

CO-CHAIR:
REP. RYAN SPAIN



700 STRATTON BUILDING
SPRINGFIELD, ILLINOIS 62706
(217) 785-2254

SEN. TERRI BRYANT
SEN. CRISTINA CASTRO
SEN. DONALD P. DeWITTE
SEN. NAPOLEON HARRIS, III
SEN. SALLY J. TURNER
REP. EVA-DINA DELGADO
REP. JACKIE HAAS
REP. STEVEN REICK
REP. CURTIS J. TARVER, II
REP. DAVE VELLA

JOINT COMMITTEE ON ADMINISTRATIVE RULES

CERTIFICATION OF NO OBJECTION TO PROPOSED RULEMAKING

This is to certify that the Joint Committee on Administrative Rules, at its 6/16/26 meeting, considered Organic Material Emission Standards and Limitations for the Metro-East Area (35 Ill. Adm. Code 219; 49 Ill. Adm. 8883), proposed by the Pollution Control Board and published in the 7/11/25 issue of the Illinois Register. After consideration, and based upon the Agreements, if any, for modification of the rulemaking made by the agency and attached to this document, the Committee determined that no Objection will be issued to the above-mentioned rulemaking.

June 16, 2026

A handwritten signature in black ink that reads "Kim Schultz".

Kim Schultz
Executive Director

JOINT COMMITTEE ON ADMINISTRATIVE RULES

ILLINOIS GENERAL ASSEMBLY

CO-CHAIR:
SEN. BILL CUNNINGHAM

CO-CHAIR:
REP. RYAN SPAIN



700 STRATTON BUILDING
SPRINGFIELD, ILLINOIS 62706
(217) 785-2254

SEN. TERRI BRYANT
SEN. CRISTINA CASTRO
SEN. DONALD P. DEWITTE
SEN. NAPOLEON HARRIS, III
SEN. SALLY J. TURNER
REP. EVA-DINA DELGADO
REP. JACKIE HAAS
REP. STEVEN REICK
REP. CURTIS J. TARVER, II
REP. DAVE VELLA

June 16, 2026

Don Brown, Clerk
Pollution Control Board
60 E. Van Buren St., Ste. 630
Chicago IL 60605

Re: Organic Material Emission Standards and Limitations for the Metro-East Area (35 Ill. Adm. Code 219; 49 Ill. Adm. 8883 - 7/11/25)

Dear Mr. Brown:

The enclosed are the Register version and the Code copy of the above-cited rulemaking as this text is to be integrated in the Administrative Code database. You can use these copies when filing the rulemaking with the Secretary of State.

Please have someone on your staff peruse the enclosed copies to be sure that they reflect the language of the rulemaking as you now understand it to exist; i.e., the original draft with any First Notice changes, technical corrections and Agreements included.

If you notice any errors or discrepancies in the enclosed versions, please notify us as quickly as possible and we will provide a corrected version you can certify to the Code Division. This material will be integrated into the Code database when adoption of the rule appears in the Illinois Register.

Thank you for your cooperation and assistance.

Sincerely,

Kim Schultz
Executive Director

Enc.

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

TITLE 35: ENVIRONMENTAL PROTECTION
SUBTITLE B: AIR POLLUTION
CHAPTER I: POLLUTION CONTROL BOARD
SUBCHAPTER c: EMISSIONS STANDARDS AND LIMITATIONS
FOR STATIONARY SOURCES

PART 219
ORGANIC MATERIAL EMISSION STANDARDS AND LIMITATIONS
FOR THE METRO EAST AREA

SUBPART A: GENERAL PROVISIONS

Section	
219.100	Introduction
219.101	Savings Clause
219.102	Abbreviations and Conversion Factors
219.103	Applicability
219.104	Definitions
219.105	Test Methods and Procedures
219.106	Compliance Dates
219.107	Operation of Afterburners
219.108	Exemptions, Variations, and Alternative Means of Control or Compliance Determinations
219.109	Vapor Pressure of Volatile Organic Liquids
219.110	Vapor Pressure of Organic Material or Solvent
219.111	Vapor Pressure of Volatile Organic Material
219.112	Incorporations by Reference
219.113	Monitoring for Negligibly-Reactive Compounds

SUBPART B: ORGANIC EMISSIONS FROM STORAGE AND LOADING OPERATIONS

Section	
219.119	Applicability for VOL
219.120	Control Requirements for Storage Containers of VOL
219.121	Storage Containers of VPL
219.122	Loading Operations
219.123	Petroleum Liquid Storage Tanks
219.124	External Floating Roofs
219.125	Compliance Dates
219.126	Compliance Plan (Repealed)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

- 219.127 Testing VOL Operations
- 219.128 Monitoring VOL Operations
- 219.129 Recordkeeping and Reporting for VOL Operations

SUBPART C: ORGANIC EMISSIONS FROM MISCELLANEOUS EQUIPMENT

- Section
- 219.141 Separation Operations
- 219.142 Pumps and Compressors
- 219.143 Vapor Blowdown
- 219.144 Safety Relief Valves

SUBPART E: SOLVENT CLEANING

- Section
- 219.181 Solvent Cleaning Degreasing Operations
- 219.182 Cold Cleaning
- 219.183 Open Top Vapor Degreasing
- 219.184 Conveyorized Degreasing
- 219.185 Compliance Schedule (Repealed)
- 219.186 Test Methods
- 219.187 Other Industrial Solvent Cleaning Operations

SUBPART F: COATING OPERATIONS

- Section
- 219.204 Emission Limitations
- 219.205 Daily-Weighted Average Limitations
- 219.206 Solids Basis Calculation
- 219.207 Alternative Emission Limitations
- 219.208 Exemptions From Emission Limitations
- 219.209 Exemption From General Rule on Use of Organic Material
- 219.210 Compliance Schedule
- 219.211 Recordkeeping and Reporting
- 219.212 Cross-Line Averaging to Establish Compliance for Coating Lines
- 219.213 Recordkeeping and Reporting for Cross-Line Averaging Participating Coating Lines
- 219.214 Changing Compliance Methods
- 219.215 Wood Furniture Coating Averaging Approach
- 219.216 Wood Furniture Coating Add-On Control Use

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

- 219.217 Wood Furniture Coating and Flat Wood Paneling Coating Work Practice Standards
- 219.218 Work Practice Standards for Paper Coatings, Metal Furniture Coatings, and Large Appliance Coatings
- 219.219 Work Practice Standards for Aerospace Facilities, Automobile and Light-Duty Truck Assembly Coatings, and Miscellaneous Metal and Plastic Parts Coatings

SUBPART G: USE OF ORGANIC MATERIAL

- Section
- 219.301 Use of Organic Material
- 219.302 Alternative Standard
- 219.303 Fuel Combustion Emission Units
- 219.304 Operations with Compliance Program

SUBPART H: PRINTING AND PUBLISHING

- Section
- 219.401 Flexographic and Rotogravure Printing
- 219.402 Applicability
- 219.403 Compliance Schedule
- 219.404 Recordkeeping and Reporting
- 219.405 Lithographic Printing: Applicability
- 219.406 Provisions Applying to Heatset Web Offset Lithographic Printing Prior to March 15, 1996 (Repealed)
- 219.407 Emission Limitations and Control Requirements for Lithographic Printing Lines
- 219.408 Compliance Schedule for Lithographic Printing On and After March 15, 1996 (Repealed)
- 219.409 Testing for Lithographic Printing
- 219.410 Monitoring Requirements for Lithographic Printing
- 219.411 Recordkeeping and Reporting for Lithographic Printing
- 219.412 Letterpress Printing Lines: Applicability
- 219.413 Emission Limitations and Control Requirements for Letterpress Printing Lines
- 219.415 Testing for Letterpress Printing Lines
- 219.416 Monitoring Requirements for Letterpress Printing Lines
- 219.417 Recordkeeping and Reporting for Letterpress Printing Lines

SUBPART Q: SYNTHETIC ORGANIC CHEMICAL AND
POLYMER MANUFACTURING PLANT

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

Section	
219.421	General Requirements
219.422	Inspection Program Plan for Leaks
219.423	Inspection Program for Leaks
219.424	Repairing Leaks
219.425	Recordkeeping for Leaks
219.426	Report for Leaks
219.427	Alternative Program for Leaks
219.428	Open-Ended Valves
219.429	Standards for Control Devices
219.430	Compliance Date (Repealed)
219.431	Applicability
219.432	Control Requirements
219.433	Performance and Testing Requirements
219.434	Monitoring Requirements
219.435	Recordkeeping and Reporting Requirements
219.436	Compliance Date

SUBPART R: PETROLEUM REFINING AND RELATED INDUSTRIES; ASPHALT MATERIALS

Section	
219.441	Petroleum Refinery Waste Gas Disposal
219.442	Vacuum Producing Systems
219.443	Wastewater (Oil/Water) Separator
219.444	Process Unit Turnarounds
219.445	Leaks: General Requirements
219.446	Monitoring Program Plan for Leaks
219.447	Monitoring Program for Leaks
219.448	Recordkeeping for Leaks
219.449	Reporting for Leaks
219.450	Alternative Program for Leaks
219.451	Sealing Device Requirements
219.452	Compliance Schedule for Leaks
219.453	Compliance Dates (Repealed)

SUBPART S: RUBBER AND MISCELLANEOUS PLASTIC PRODUCTS

Section	
219.461	Manufacture of Pneumatic Rubber Tires

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

219.462	Green Tire Spraying Operations
219.463	Alternative Emission Reduction Systems
219.464	Emission Testing
219.465	Compliance Dates (Repealed)
219.466	Compliance Plan (Repealed)

SUBPART T: PHARMACEUTICAL MANUFACTURING

Section	
219.480	Applicability
219.481	Control of Reactors, Distillation Units, Crystallizers, Centrifuges and Vacuum Dryers
219.482	Control of Air Dryers, Production Equipment Exhaust Systems and Filters
219.483	Material Storage and Transfer
219.484	In-Process Tanks
219.485	Leaks
219.486	Other Emission Units
219.487	Testing
219.488	Monitoring for Air Pollution Control Equipment
219.489	Recordkeeping for Air Pollution Control Equipment

SUBPART V: BATCH OPERATIONS AND AIR OXIDATION PROCESSES

Section	
219.500	Applicability for Batch Operations
219.501	Control Requirements for Batch Operations
219.502	Determination of Uncontrolled Total Annual Mass Emissions and Actual Weighted Average Flow Rate Values for Batch Operations
219.503	Performance and Testing Requirements for Batch Operations
219.504	Monitoring Requirements for Batch Operations
219.505	Reporting and Recordkeeping for Batch Operations
219.506	Compliance Date
219.520	Emission Limitations for Air Oxidation Processes
219.521	Definitions (Repealed)
219.522	Savings Clause
219.523	Compliance
219.524	Determination of Applicability
219.525	Emission Limitations for Air Oxidation Processes (Renumbered)
219.526	Testing and Monitoring
219.527	Compliance Date (Repealed)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

SUBPART W: AGRICULTURE

Section
219.541 Pesticide Exception

SUBPART X: CONSTRUCTION

Section
219.561 Architectural Coatings
219.562 Paving Operations
219.563 Cutback Asphalt

SUBPART Y: GASOLINE DISTRIBUTION

Section
219.581 Bulk Gasoline Plants
219.582 Bulk Gasoline Terminals
219.583 Gasoline Dispensing Operations – Storage Tank Filling Operations
219.584 Gasoline Delivery Vessels
219.585 Gasoline Volatility Standards (Repealed)
219.586 Gasoline Dispensing Operations – Motor Vehicle Fueling Operations (Repealed)

SUBPART Z: DRY CLEANERS

Section
219.601 Perchloroethylene Dry Cleaners (Repealed)
219.602 Exemptions (Repealed)
219.603 Leaks (Repealed)
219.604 Compliance Dates (Repealed)
219.605 Compliance Plan (Repealed)
219.606 Exception to Compliance Plan (Repealed)
219.607 Standards for Petroleum Solvent Dry Cleaners
219.608 Operating Practices for Petroleum Solvent Dry Cleaners
219.609 Program for Inspection and Repair of Leaks
219.610 Testing and Monitoring
219.611 Exemption for Petroleum Solvent Dry Cleaners
219.612 Compliance Dates (Repealed)
219.613 Compliance Plan (Repealed)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

SUBPART AA: PAINT AND INK MANUFACTURING

Section

219.620	Applicability
219.621	Exemption for Waterbase Material and Heatset-Offset Ink
219.623	Permit Conditions
219.624	Open-Top Mills, Tanks, Vats or Vessels
219.625	Grinding Mills
219.626	Storage Tanks
219.628	Leaks
219.630	Clean Up
219.636	Compliance Schedule
219.637	Recordkeeping and Reporting

SUBPART BB: POLYSTYRENE PLANTS

Section

219.640	Applicability
219.642	Emissions Limitation at Polystyrene Plants
219.644	Emissions Testing

SUBPART FF: BAKERY OVENS

Section

219.720	Applicability (Repealed)
219.722	Control Requirements (Repealed)
219.726	Testing (Repealed)
219.727	Monitoring (Repealed)
219.728	Recordkeeping and Reporting (Repealed)
219.729	Compliance Date (Repealed)
219.730	Certification (Repealed)

SUBPART GG: MARINE TERMINALS

Section

219.760	Applicability
219.762	Control Requirements
219.764	Compliance Certification
219.766	Leaks
219.768	Testing and Monitoring

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

219.770 Recordkeeping and Reporting

SUBPART HH: MOTOR VEHICLE REFINISHING

Section

219.780	Emission Limitations
219.782	Alternative Control Requirements
219.784	Equipment Specifications
219.786	Surface Preparation Materials
219.787	Work Practices
219.788	Testing
219.789	Monitoring and Recordkeeping for Control Devices
219.790	General Recordkeeping and Reporting (Repealed)
219.791	Compliance Date
219.792	Registration (Repealed)
219.875	Applicability of Subpart BB (Renumbered)
219.877	Emissions Limitation at Polystyrene Plants (Renumbered)
219.879	Compliance Date (Repealed)
219.881	Compliance Plan (Repealed)
219.883	Special Requirements for Compliance Plan (Repealed)
219.886	Emissions Testing (Renumbered)

SUBPART II: FIBERGLASS BOAT MANUFACTURING MATERIALS

Section

219.890	Applicability
219.891	Emission Limitations and Control Requirements
219.892	Testing and Monitoring Requirements
219.894	Recordkeeping and Reporting Requirements

SUBPART JJ: MISCELLANEOUS INDUSTRIAL ADHESIVES

Section

219.900	Applicability
219.901	Emission Limitations and Control Requirements
219.902	Testing Requirements
219.903	Monitoring Requirements
219.904	Recordkeeping and Reporting Requirements

SUBPART PP: MISCELLANEOUS FABRICATED PRODUCT

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

MANUFACTURING PROCESSES

Section	
219.920	Applicability
219.923	Permit Conditions
219.926	Control Requirements
219.927	Compliance Schedule
219.928	Testing

SUBPART QQ: MISCELLANEOUS FORMULATION
MANUFACTURING PROCESSES

Section	
219.940	Applicability
219.943	Permit Conditions
219.946	Control Requirements
219.947	Compliance Schedule
219.948	Testing

SUBPART RR: MISCELLANEOUS ORGANIC CHEMICAL
MANUFACTURING PROCESSES

Section	
219.960	Applicability
219.963	Permit Conditions
219.966	Control Requirements
219.967	Compliance Schedule
219.968	Testing

SUBPART TT: OTHER EMISSION UNITS

Section	
219.980	Applicability
219.983	Permit Conditions
219.986	Control Requirements
219.987	Compliance Schedule
219.988	Testing

SUBPART UU: RECORDKEEPING AND REPORTING

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

Section

219.990 Exempt Emission Units

219.991 Subject Emission Units

219.APPENDIX A	List of Chemicals Defining Synthetic Organic Chemical and Polymer Manufacturing
219.APPENDIX B	VOM Measurement Techniques for Capture Efficiency (Repealed)
219.APPENDIX C	Reference Methods and Procedures
219.APPENDIX D	Coefficients for the Total Resource Effectiveness Index (TRE) Equation
219.APPENDIX E	List of Affected Marine Terminals
219.APPENDIX G	TRE Index Measurements for SOCM I Reactors and Distillation Units
219.APPENDIX H	Baseline VOM Content Limitations for Subpart F, Section 219.212 Cross-Line Averaging

AUTHORITY: Implementing Section 10 and authorized by Sections 27, 28 and 28.5 of the Environmental Protection Act [415 ILCS 5/10, 27, 28 and 28.5].

SOURCE: Adopted in R91-8 at 15 Ill. Reg. 12491, effective August 16, 1991; amended in R91-24 at 16 Ill. Reg. 13597, effective August 24, 1992; amended in R91-30 at 16 Ill. Reg. 13883, effective August 24, 1992; emergency amendment in R93-12 at 17 Ill. Reg. 8295, effective May 24, 1993, for a maximum of 150 days; amended in R93-9 at 17 Ill. Reg. 16918, effective September 27, 1993 and October 21, 1993; amended in R93-28 at 18 Ill. Reg. 4242, effective March 3, 1994; amended in R94-12 at 18 Ill. Reg. 14987, effective September 21, 1994; amended in R94-15 at 18 Ill. Reg. 16415, effective October 25, 1994; amended in R94-16 at 18 Ill. Reg. 16980, effective November 15, 1994; emergency amendment in R95-10 at 19 Ill. Reg. 3059, effective February 28, 1995, for a maximum of 150 days; amended in R94-21, R94-31 and R94-32 at 19 Ill. Reg. 6958, effective May 9, 1995; amended in R94-33 at 19 Ill. Reg. 7385, effective May 22, 1995; amended in R96-2 at 20 Ill. Reg. 3848, effective February 15, 1996; amended in R96-13 at 20 Ill. Reg. 14462, effective October 28, 1996; amended in R97-24 at 21 Ill. Reg. 7721, effective June 9, 1997; amended in R97-31 at 22 Ill. Reg. 3517, effective February 2, 1998; amended in R04-12/20 at 30 Ill. Reg. 9799, effective May 15, 2006; amended in R06-21 at 31 Ill. Reg. 7110, effective April 30, 2007; amended in R10-10 at 34 Ill. Reg. 5392, effective March 23, 2010; amended in R10-8 at 34 Ill. Reg. 9253, effective June 25, 2010; amended in R10-20 at 34 Ill. Reg. 14326, effective September 14, 2010; amended in R10-8(A) at 35 Ill. Reg. 496, effective December 21, 2010; amended in R11-23 at 35 Ill. Reg. 13676, effective July 27, 2011; amended in R11-23(A) at 35 Ill. Reg. 18830, effective October 25, 2011; amended in R12-24 at 37 Ill. Reg. 1722, effective January 28, 2013; amended in R13-18 at 38 Ill. Reg. 1061, effective December 23, 2013; amended in R21-18 at 45 Ill. Reg. 3553, effective March 4, 2021; amended in R25-25 at 50 Ill. Reg. _____, effective _____.

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

SUBPART F: COATING OPERATIONS

Section 219.204 Emission Limitations

Except as provided in Sections 219.205, 219.207, 219.208, 219.212, 219.215 and 219.216, an owner or operator of a coating line must not apply at any time any coating in which the VOM content exceeds the following emission limitations for the specified coating. Except as otherwise provided in subsections (a), (c), (g), (h), (j), (l), (n), (o), (q), and (r), compliance with the emission limitations marked with an asterisk in this Section is required on and after March 15, 1996, and compliance with emission limitations not marked with an asterisk is required until March 15, 1996. The following emission limitations are expressed in units of VOM per volume of coating (minus water and any compounds which are specifically exempted from the definition of VOM) as applied at each coating applicator, except where noted. Compounds which are specifically exempted from the definition of VOM should be treated as water for the purpose of calculating the "less water" part of the coating composition. Compliance with this Subpart must be demonstrated through the applicable coating analysis test methods and procedures specified in Section 219.105(a) and the recordkeeping and reporting requirements specified in Section 219.211(c) except where noted. (Note: The equation presented in Section 219.206 must be used to calculate emission limitations for determining compliance by add-on controls, credits for transfer efficiency, emissions trades and cross-line averaging.) The emission limitations are as follows:

		kg/l	lb/gal
a)	Automobile or Light-Duty Truck Coating		
1)	Prior to May 1, 2012:		
	A) Prime coat	0.14	(1.2)
		0.14*	(1.2)*
	B) Primer surface coat	1.81	(15.1)
		1.81*	(15.1)*

BOARD NOTE: The primer surface coat limitation is in units of kg (lbs) of VOM per l (gal) of coating solids deposited. Compliance with the limitation must be based on the daily-weighted average from an entire primer surface operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(A) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

demonstrating compliance with the protocol. Section 219.205 does not apply to the primer surface limitation.

C)	Topcoat	kg/l	lb/gal
		1.81	(15.1)
		1.81*	(15.1)*

BOARD NOTE: The topcoat limitation is in units of kg (lbs) of VOM per l (gal) of coating solids deposited. Compliance with the limitation must be based on the daily-weighted average from an entire topcoat operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(A) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the topcoat limitation.

D)	Final repair coat	kg/l	lb/gal
		0.58	(4.8)
		0.58*	(4.8)*

- 2) On and after May 1, 2012, subject automobile and light-duty truck coating lines must comply with the following limitations. These limitations must not apply to materials supplied in containers with a net volume of 0.47 liters (16 oz) or less, or a net weight of 0.45 kg (1 lb) or less:

- A) Electrodeposition primer (EDP) operations. For purposes of this subsection (a)(2)(A), "electrodeposition" means a water-borne dip coating process in which opposite electrical charges are applied to the substrate and the coating. The coating is attracted to the substrate due to the electrochemical potential difference that is created.

		kg VOM/l coating solids applied	lb VOM/gal coating solids applied
i)	When solids turnover ratio (R _T) is greater than or equal	0.084	(0.7)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

to 0.160

- ii) When R_T is greater than or equal to 0.040 and less than 0.160
- | | |
|--------------------------------|--|
| $0.084 \times 350^{0.160-R_T}$ | $(0.084 \times 350^{0.160-R_T} \times 8.34)$ |
|--------------------------------|--|

B) Primer surfacer operations

kg VOM/l coating solids deposited	lb VOM/gal coating solids deposited
--	---

- i) VOM content limitation 1.44 (12.0)
- ii) Compliance with the limitation in subsection (a)(2)(B)(i) must be based on the daily-weighted average from an entire primer surfacer operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(B) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the primer surfacer limitation.

C) Topcoat operations

kg VOM/l coating solids deposited	lb VOM/gal coating solids deposited
--	---

- i) VOM content limitation 1.44 (12.0)
- ii) Compliance with the limitation in subsection (a)(2)(C)(i) must be based on the daily-weighted average from an entire topcoat operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(B) and the recordkeeping and reporting

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the topcoat limitation.

- D) Combined primer surfacer and topcoat operations
- | | kg VOM/l
coating
solids
deposited | lb VOM/gal
coating solids
deposited |
|---|--|---|
| i) VOM content limitation | 1.44 | (12.0) |
| ii) Compliance with the limitation in subsection (a)(2)(D)(i) must be based on the daily-weighted average from the combined primer surfacer and topcoat operations. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(B) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the combined primer surfacer and topcoat limitation. | | |
- E) Final repair coat operations
- | | kg/l
coatings | lb/gal
coatings |
|--|------------------|--------------------|
| i) VOM content limitation | 0.58 | (4.8) |
| ii) Compliance with the final repair operations limitation in subsection (a)(2)(E)(i) must be on an occurrence-weighted average basis, calculated in accordance with the equation below, in which clear coatings must have a weighting factor of 2 and all other coatings must have a weighting factor of 1. | | |

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

For purposes of this subsection (a)(2)(E)(ii), an "occurrence" is the application of the combination of coatings that constitute a final repair coat for a single automobile or light-duty truck. Section 219.205 does not apply to the final repair coat limitation.

$$VOM_{tot} = \frac{2VOM_{cc} + \sum_{i=1}^n VOM_i}{n + 2}$$

where:

VOM_{tot} = Total VOM content of all coatings, as applied, on an occurrence weighted average basis, and used to determine compliance with this subsection (a)(2)(E).

i = Subscript denoting a specific coating applied.

n = Total number of coatings applied in the final repair operation, other than clear coatings.

VOM_{cc} = The VOM content, as applied, of the clear coat used in the final repair operation.

VOM_i = The VOM content of each coating used in the final repair operation, as applied, other than clear coatings.

- F) Miscellaneous Materials. For reactive adhesives subject to this subsection (a)(2)(F), compliance must be demonstrated in accordance with the methods and procedures set forth in appendix A to Subpart PPPP of 40 CFR 63, incorporated by reference in Section 219.112.

	kg/l	lb/gal
i) Glass bonding primer	0.90	(7.51)
ii) Adhesive	0.25	(2.09)
iii) Cavity wax	0.65	(5.42)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

	iv)	Trunk sealer	0.65	(5.42)
	v)	Deadener	0.65	(5.42)
	vi)	Gasket/gasket sealing material	0.20	(1.67)
	vii)	Underbody coating	0.65	(5.42)
	viii)	Trunk interior coating	0.65	(5.42)
	ix)	Bedliner	0.20	(1.67)
	x)	Weatherstrip adhesive	0.75	(6.26)
	xi)	Lubricating wax/compound	0.70	(5.84)
b)		Can Coating	kg/l	lb/gal
	1)	Sheet basecoat and overvarnish		
		A) Sheet basecoat	0.34	(2.8)
			0.26*	(2.2)*
		B) Overvarnish	0.34	(2.8)
			0.34	(2.8)*
	2)	Exterior basecoat and overvarnish	0.34	(2.8)
			0.25*	(2.1)*
	3)	Interior body spray coat		
		A) Two piece	0.51	(4.2)
			0.44*	(3.7)*
		B) Three piece	0.51	(4.2)
			0.51*	(4.2)*
	4)	Exterior end coat	0.51	(4.2)
			0.51*	(4.2)*

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

5)	Side seam spray coat	0.66 0.66*	(5.5) (5.5)*
6)	End sealing compound coat	0.44 0.44*	(3.7) (3.7)*
c)	Paper Coating		
1)	Prior to May 1, 2011:	kg/l 0.28	lb/gal (2.3)
2)	On and after May 1, 2011:	kg VOM/kg (lb VOM/lb) solids applied	kg VOM/kg (lb VOM/lb) coatings applied
A)	Pressure sensitive tape and label surface coatings	0.20	(0.067)
B)	All other paper coatings	0.40	(0.08)
3)	The paper coating limitation in this subsection (c) does not apply to any owner or operator of any paper coating line on which flexographic, rotogravure, lithographic, or letterpress printing is performed if the paper coating line complies with the applicable emissions limitations in Subpart H. In addition, screen printing on paper is not regulated as paper coating, but is regulated under Subpart TT. On and after May 1, 2011, the paper coating limitation also does not apply to coating performed on or in-line with any digital printing press, or to size presses and on-machine coaters on papermaking machines applying sizing or water-based clays.		
d)	Coil Coating	kg/l 0.31 0.20*	lb/gal (2.6) (1.7)*
e)	Fabric Coating	0.35 0.28*	(2.9) (2.3)*
f)	Vinyl Coating	0.45 0.28*	(3.8) (2.3)*

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

g) Metal Furniture Coating			
1)	Prior to May 1, 2011:	kg/l	lb/gal
	A) Air dried	0.34	(2.8)
	B) Baked	0.28	(2.3)
2)	On and after May 1, 2011:	kg/l (lb/gal)	kg/l (lb/gal) solids applied
	A) General, One Component	0.275 (2.3)	0.40 (3.3)
	B) General, Multi-Component		
	i) Air dried	0.340 (2.8)	0.55 (4.5)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
	C) Extreme High Gloss		
	i) Air dried	0.340 (2.8)	0.55 (4.5)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
	D) Extreme Performance		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
	E) Heat Resistant		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360 (3.0)	0.61 (5.1)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

F)	Metallic	0.420 (3.5)	0.80 (6.7)
G)	Pretreatment Coatings	0.420 (3.5)	0.80 (6.7)
H)	Solar Absorbent		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360 (3.0)	0.61 (5.1)

- 3) On and after May 1, 2011, the limitations in this subsection (g) do not apply to stencil coatings, safety-indicating coatings, solid-film lubricants, electric-insulating and thermal-conducting coatings, touch-up and repair coatings, or coating applications utilizing hand-held aerosol cans.

h) Large Appliance Coating

1)	Prior to May 1, 2011:	kg/l	lb/gal
	A) Air dried	0.34	(2.8)
	B) Baked	0.28	(2.3)
2)	On and after May 1, 2011:	kg/l (lb/gal)	kg/l (lb/gal) solids applied
	A) General, One Component	0.275 (2.3)	0.40 (3.3)
	B) General, Multi-Component		
	i) Air dried	0.340 (2.8)	0.55 (4.5)
	ii) Baked	0.275 (2.3)	0.40 (3.3)
	C) Extreme High Gloss		
	i) Air dried	0.340	0.55

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

		(2.8)	(4.5)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
D)	Extreme Performance		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
E)	Heat Resistant		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
F)	Metallic	0.420 (3.5)	0.80 (6.7)
G)	Pretreatment Coatings	0.420 (3.5)	0.80 (6.7)
H)	Solar Absorbent		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360	0.61
3)	The limitations in this subsection (h) do not apply to the use of quick-drying lacquers for repair of scratches and nicks that occur during assembly, provided that the volume of coating does not exceed 0.95 l (1 quart) in any one rolling eight-hour period. On and after May 1, 2011, these limitations also do not apply to stencil coatings, safety-indicating coatings, solid-film lubricants, electric-insulating and thermal-conducting coatings, touch-up and repair coatings, or coating applications utilizing hand-held aerosol cans.		

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

i)	Magnet Wire Coating	kg/l 0.20 0.20*	lb/gal (1.7) (1.7)*
j)	Prior to May 1, 2012: Miscellaneous Metal Parts and Products Coating		
1)	Clear coating	0.52 0.52*	(4.3) (4.3)*
2)	Extreme performance coating		
A)	Air dried	0.42 0.42*	(3.5) (3.5)*
B)	Baked	0.42 0.40*	(3.5) (3.3)*
3)	Steel pail and drum interior coating	0.52 0.52*	(4.3) (4.3)*
4)	All other coatings		
A)	Air dried	0.42 0.40*	(3.5) (3.3)*
B)	Baked	0.36 0.34*	(3.0) (2.8)*
5)	Metallic Coating		
A)	Air dried	0.42 0.42*	(3.5) (3.5)*
B)	Baked	0.36 0.36	(3.0) (3.0)*
6)	For purposes of subsection (j)(5), "metallic coating" means a coating which contains more than ¼ lb/gal of metal particles, as applied.		

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

BOARD NOTE: On and after May 1, 2012, the limitations in Section 219.204(q) apply to this category of coating.

k)	Heavy Off-Highway Vehicle Products Coating	kg/l	lb/gal
1)	Extreme performance prime coat	0.42 0.42*	(3.5) (3.5)*
2)	Extreme performance topcoat (air dried)	0.42 0.42*	(3.5) (3.5)*
3)	Final repair coat (air dried)	0.42 0.42*	(3.5) (3.5)*
4)	All other coatings are subject to the emission limitations for miscellaneous metal parts and products coatings in subsection (j).		
l)	Wood Furniture Coating		
1)	Limitations before March 15, 1998:	kg/l	lb/gal
A)	Clear topcoat	0.67	(5.6)
B)	Opaque stain	0.56	(4.7)
C)	Pigmented coat	0.60	(5.0)
D)	Repair coat	0.67	(5.6)
E)	Sealer	0.67	(5.6)
F)	Semi-transparent stain	0.79	(6.6)
G)	Wash coat	0.73	(6.1)

BOARD NOTE: Prior to March 15, 1998, an owner or operator of a wood furniture coating operation subject to this Section must apply all coatings, with the exception of no more than 37.8 l (10 gal) of coating per day used for touch-up and repair operations, using one or more of the following application systems: airless spray application system, air-assisted airless spray application system, electrostatic spray application system, electrostatic bell or disc spray application system, heated airless spray application system, roller coating, brush or wipe coating application

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

system, dip coating application system or high volume low pressure (HVLP) application system.)

- 2) On and after March 15, 1998, wood furniture sealers and topcoats must comply with one of the limitations specified in subsections (1)(2)(A) through (E):

		kg VOM/kg solids	lb VOM/lb solids
A)	Topcoat	0.8	(0.8)
B)	Sealers and topcoats with the following limits:		
i)	Sealer other than acid-cured alkyd amino vinyl sealer	1.9	(1.9)
ii)	Topcoat other than acid-cured alkyd amino conversion varnish topcoat	1.8	(1.8)
iii)	Acid-cured alkyd amino vinyl sealer	2.3	(2.3)
iv)	Acid-cured alkyd amino conversion varnish topcoat	2.0	(2.0)
C)	Meet the provisions of Section 219.215 for use of an averaging approach;		
D)	Achieve a reduction in emissions equivalent to the requirements of subsection (1)(2)(A) or (B), as calculated using Section 219.216; or		
E)	Use a combination of the methods specified in subsections (1)(2)(A) through (D).		

- 3) Other wood furniture coating limitations on and after March 15, 1998:

		kg/l	lb/gal
A)	Opaque stain	0.56	(4.7)
B)	Non-topcoat pigmented coat	0.60	(5.0)

NOTICE OF ADOPTED AMENDMENT

- | | | | |
|----|--|--|--------|
| C) | Repair coat | 0.67 | (5.6) |
| D) | Semi-transparent stain | 0.79 | (6.6) |
| E) | Wash coat | 0.73 | (6.1) |
| 4) | Other wood furniture coating requirements on and after March 15, 1998: | | |
| A) | A source subject to the limitations of subsection (1), (2) or (3) and utilizing one or more wood furniture coating spray booths must not use strippable spray booth coatings containing more than 0.8 kg VOM/kg solids (0.8 lb VOM/lb solids), as applied. | | |
| B) | Any source subject to the limitations of subsection (1)(2) or (3) must comply with Section 219.217. | | |
| C) | Any source subject to the limitations of subsection (1)(2)(A) or (B) and utilizing one or more continuous coaters, must for each continuous coater, use an initial coating which complies with the limitations of subsection (1)(2)(A) or (B). The viscosity of the coating in each reservoir must always be greater than or equal to the viscosity of the initial coating in the reservoir. The owner or operator must: | | |
| | i) | Monitor the viscosity of the coating in the reservoir with a viscosity meter or by testing the viscosity of the initial coating and retesting the coating in the reservoir each time solvent is added; | |
| | ii) | Collect and record the reservoir viscosity and the amount and weight of VOM per weight of solids of coating and solvent each time coating or solvent is added; and | |
| | iii) | Maintain these records at the source for a period of three years. | |
| m) | Prior to May 1, 2012: Plastic Parts Coating:
Automotive/Transportation | kg/l | lb/gal |

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

- 1) Interiors
 - A) Baked
 - i) Color coat 0.49* (4.1)*
 - ii) Primer 0.46* (3.8)*
 - B) Air dried
 - i) Color coat 0.38* (3.2)*
 - ii) Primer 0.42* (3.5)*
- 2) Exteriors (flexible and non-flexible)
 - A) Baked
 - i) Primer 0.60* (5.0)*
 - ii) Primer non-flexible 0.54* (4.5)*
 - iii) Clear coat 0.52* (4.3)*
 - iv) Color coat 0.55* (4.6)*
 - B) Air dried
 - i) Primer 0.66* (5.5)*
 - ii) Clear coat 0.54* (4.5)*
 - iii) Color coat (red & black) 0.67* (5.6)*
 - iv) Color coat (others) 0.61* (5.1)*
- 3) Specialty
 - A) Vacuum metallizing basecoats, texture basecoats 0.66* (5.5)*
 - B) Black coatings, reflective argent coatings, air bag cover coatings, and soft coatings 0.71* (5.9)*

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

C)	Gloss reducers, vacuum metallizing topcoats, and texture topcoats	0.77*	(6.4)*
D)	Stencil coatings, adhesion primers, ink pad coatings, electrostatic prep coatings, and resist coatings	0.82*	(6.8)*
E)	Head lamp lens coatings	0.89*	(7.4)*

BOARD NOTE: On and after May 1, 2012, the limitations in Section 219.204(q) apply to this category of coating.

n)	Prior to May 1, 2012: Plastic Parts Coating: Business Machine	kg/l	lb/gal
1)	Primer	0.14*	(1.2)*
2)	Color coat (non-texture coat)	0.28*	(2.3)*
3)	Color coat (texture coat)	0.28*	(2.3)*
4)	Electromagnetic interference/radio frequency interference (EMI/RFI) shielding coatings	0.48*	(4.0)*
5)	Specialty Coatings		
A)	Soft coat	0.52*	(4.3)*
B)	Plating resist	0.71*	(5.9)*
C)	Plating sensitizer	0.85*	(7.1)*

BOARD NOTE: On and after May 1, 2012, the limitations in Section 219.204(q) apply to this category of coating.

- o) Flat Wood Paneling Coatings. On and after August 1, 2010, flat wood paneling coatings must comply with one of the following limitations:
- 1) 0.25 kg VOM/l of coatings (2.1 lb VOM/gal coatings); or
 - 2) 0.35 kg VOM/l solids (2.9 lb VOM/gal solids).

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

BOARD NOTE: The Board has omitted subsection (p) and adopted a subsection (q) in order to preserve consistent labeling with similar requirements in 35 Ill. Adm. Code 218.

q) Miscellaneous Metal Parts and Products Coatings and Plastic Parts and Products Coatings On and After May 1, 2012. On and after May 1, 2012, the owner or operator of a miscellaneous metal or plastic parts coating line must comply with the limitations in subsection (q). The limitations in subsection (q) do not apply to aerosol coating products, powder coatings, or primer sealants and ejection cartridge sealants used in ammunition manufacturing. Primer sealants and ejection cartridge sealants are regulated under Subpart TT.

1) Metal Parts and Products. For purposes of this subsection (q)(1), "corrosion resistant basecoat" means a water-borne epoxy coating applied via an electrodeposition process to a metal surface prior to spray coating, for the purpose of enhancing corrosion resistance. The limitations in subsection (q)(1) do not apply to stencil coats, safety-indicating coatings, solid-film lubricants, electric-insulating and thermal-conducting coatings, magnetic data storage disk coatings, and plastic extruded onto metal parts to form a coating. The limitations in Section 219.219 apply to these coatings unless specifically excluded.

	kg VOM/l coating solids applied	lb VOM/gal coating solids applied
A) General one component coating		
i) Air dried	0.34 (2.8)	0.54 (4.52)
ii) Baked	0.28 (2.3)	0.40 (3.35)
B) General multi-component coating		
i) Air dried	0.34 (2.8)	0.54 (4.52)
ii) Baked	0.28	0.40

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

		(2.3)	(3.35)
C)	Camouflage coating	0.42 (3.5)	0.80 (6.67)
D)	Electric-insulating varnish	0.42 (3.5)	0.80 (6.67)
E)	Etching filler	0.42 (3.5)	0.80 (6.67)
F)	Extreme high-gloss coating		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.36 (3.0)	0.61 (5.06)
G)	Extreme performance coating		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.36 (3.0)	0.61 (5.06)
H)	Heat-resistant coating		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.36 (3.0)	0.61 (5.06)
I)	High performance architectural coating	0.42 (3.5)	0.80 (6.67)
J)	High temperature coating	0.42 (3.5)	0.80 (6.67)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

K)	Metallic coating		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.36 (3.0)	0.61 (5.06)
L)	Military specification coating		
	i) Air dried	0.34 (2.8)	0.54 (4.52)
	ii) Baked	0.28 (2.3)	0.40 (3.35)
M)	Mold-seal coating	0.42 (3.5)	0.80 (6.67)
N)	Pan backing coating	0.42 (3.5)	0.80 (6.67)
O)	Prefabricated architectural coating: multi-component		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.28 (2.3)	0.40 (3.35)
P)	Prefabricated architectural coating: one-component		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.28 (2.3)	0.40 (3.35)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

Q)	Pretreatment coating	0.42 (3.5)	0.80 (6.67)
R)	Repair coats and touch-up coatings		
	i) Air dried	0.42 (3.5)	
	ii) Baked	0.36 (3.01)	
S)	Silicone release coating	0.42 (3.5)	0.80 (6.67)
T)	Solar-absorbent coating		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.36 (3.0)	0.61 (5.06)
U)	Vacuum-metalizing coating	0.42 (3.5)	0.80 (6.67)
V)	Drum coating, new, exterior	0.34 (2.8)	0.54 (4.52)
W)	Drum coating, new, interior	0.42 (3.5)	0.80 (6.67)
X)	Drum coating, reconditioned, exterior	0.42 (3.5)	0.80 (6.67)
Y)	Drum coating, reconditioned, interior	0.50 (4.2)	1.17 (9.78)
Z)	Ammunition sealants		

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.36 (3.0)	0.61 (5.06)
AA) Electrical switchgear compartment coatings			
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.36 (3.0)	0.61 (5.06)
BB) All other coatings			
	i) Air dried	0.40 (3.3)	0.73 (5.98)
	ii) Baked: primer/topcoat	0.34 (2.8)	0.54 (4.52)
2)	Plastic Parts and Products: Miscellaneous. For purposes of this subsection (q)(2), miscellaneous plastic parts and products are plastic parts and products that are not subject to subsection (q)(3), (q)(4), (q)(5), or (q)(6). The limitations in subsection (q)(2) do not apply to touch-up and repair coatings; stencil coats applied on clear or transparent substrates; clear or translucent coatings; coatings applied at a paint manufacturing facility while conducting performance tests on the coatings; any individual coating category used in volumes less than 189.2 liters (50 gallons) in any one calendar year, if the total usage of all such coatings does not exceed 756.9 liters (200 gallons) per calendar year per source and substitute compliant coatings are not available; reflective coatings applied to highway cones; mask coatings that are less than 0.5 mm thick (dried) if the area coated is less than 25 square inches; electromagnetic interference/radio frequency interference (EMI/RFI) shielding coatings; and heparin-benzalkonium chloride (HBAC)-containing coatings applied to medical devices if the total usage of all such coatings does not exceed		

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

378.4 liters (100 gallons) per calendar year per source. The limitations in Section 219.219 apply to these coatings unless specifically excluded.

		kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A)	General one component coating	0.28 (2.3)	0.40 (3.35)
B)	General multi-component	0.42 (3.5)	0.80 (6.67)
C)	Electric dissipating coatings and shock-free coatings	0.80 (6.7)	8.96 (74.7)
D)	Extreme performance (2-pack coatings)	0.42 (3.5)	0.80 (6.67)
E)	Metallic coating	0.42 (3.5)	0.80 (6.67)
F)	Military specification coating		
	i) 1-pack coatings	0.28 (2.3)	0.54 (4.52)
	ii) 2-pack coatings	0.42 (3.5)	0.80 (6.67)
G)	Mold-seal coating	0.76 (6.3)	5.24 (43.7)
H)	Multi-colored coating	0.68 (5.7)	3.04 (25.3)
I)	Optical coating	0.80 (6.7)	8.96 (74.7)
J)	Vacuum-metalizing coating	0.80	8.96

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

		(6.7)	(74.7)
3)	Plastic Parts and Products Automotive/Transportation		
		kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A)	High bake coatings – interior and exterior parts		
i)	Flexible primer	0.54 (4.5)	1.39 (11.58)
ii)	Non-flexible primer	0.42 (3.5)	0.80 (6.67)
iii)	Basecoats	0.52 (4.3)	1.24 (10.34)
iv)	Clear coat	0.48 (4.0)	1.05 (8.76)
v)	Non-basecoat/clear coat	0.52 (4.3)	1.24 (10.34)
B)	Low bake/air dried coatings – exterior parts		
i)	Primers	0.58 (4.8)	1.66 (13.80)
ii)	Basecoat	0.60 (5.0)	1.87 (15.59)
iii)	Clear coats	0.54 (4.5)	1.39 (11.58)
iv)	Non-basecoat/clear coat	0.60	1.87

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

		(5.0)	(15.59)
C)	Low bake/air dried coatings – interior parts		
i)	Color coat	0.38 (3.2)	0.67 (5.66)
ii)	Primer	0.42 (3.5)	0.80 (6.67)
D)	Touchup and repair coatings	0.62 (5.2)	2.13 (17.72)
E)	Specialty		
i)	Vacuum metallizing basecoats	0.66 (5.5)	2.62 (21.8)
ii)	Vacuum metallizing topcoats	0.77 (6.4)	6.06 (49.1)
F)	Red, yellow, and black coatings: Subject coating lines must comply with a limit determined by multiplying the appropriate limit in subsections (q)(3)(A) through (q)(3)(C) by 1.15.		
4)	Plastic Parts and Products: Business Machine. The limitations of this subsection (q)(4) do not apply to vacuum metallizing coatings, gloss reducers, texture topcoats, adhesion primers, electrostatic preparation coatings, stencil coats, and resist coats other than plating resist coats. The limitations in Section 219.219 apply to these coatings unless specifically excluded.		
		kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A)	Primers	0.35 (2.9)	0.57 (4.80)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

B)	Topcoat	0.35 (2.9)	0.57 (4.80)
C)	Color coat (texture coat)	0.28 (2.3)	0.40 (4.80)
D)	Color coat (non-texture coat)	0.28 (2.3)	0.40 (4.80)
E)	Texture coats other than color texture coats	0.35 (2.9)	0.57 (4.80)
F)	EMI/RFI shielding coatings	0.48 (4.0)	1.05 (8.76)
G)	Fog coat	0.26 (2.2)	0.38 (3.14)
H)	Touchup and repair	0.35 (2.9)	0.57 (4.80)

5) Pleasure Craft Surface Coatings

		kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A)	Extreme high gloss coating – topcoat	0.60 (5.0)	1.88 (15.6)
B)	High gloss coating – topcoat	0.42 (3.5)	0.80 (6.7)
C)	Pretreatment wash primer	0.78 (6.5)	6.67 (55.6)
D)	Finish primer surfacer		

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

	Prior to January 1, 2014	0.60 (5.0)	1.88 (15.6)
	On and after January 1, 2014	0.42 (3.5)	0.80 (6.7)
E)	High build primer/surfacer	0.34 (2.8)	0.55 (4.6)
F)	Aluminum substrate antifoulant coating	0.56 (4.7)	1.53 (12.8)
G)	Other substrate antifoulant coating	0.40 (3.3)	0.73 (5.8)
H)	Antifouling Sealer/Tie Coat	0.42 (3.5)	0.80 (6.7)
I)	All other pleasure craft surface coatings for metal or plastic	0.42 (3.5)	0.80 (6.7)
6)	Motor Vehicle Materials		
		kg/l (lb/gal) coatings	
A)	Cavity wax	0.65 (5.42)	
B)	Sealer	0.65 (5.42)	
C)	Deadener	0.65 (5.42)	
D)	Gasket/gasket sealing material	0.20 (1.67)	
E)	Underbody coating	0.65 (5.42)	

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

F)	Trunk interior coating	0.65 (5.42)
G)	Bedliner	0.20 (1.67)
H)	Lubricating wax/compound	0.70 (5.84)

- r) Aerospace Facilities. On and after July 1, 2021, the owner or operator of an aerospace facility must comply with the coating limitations in this subsection (r). The limitations in this subsection (r) do not apply to the following activities in which coating of aerospace components and vehicles may take place: research and development, quality control, laboratory testing, and electronic parts and assemblies (except for coating of completed assemblies). The limitations in this subsection (r) also do not apply to aerospace facility operations involving space vehicles or rework operations performed on antique aerospace vehicles or components. The coating limitations in subsections (r)(1) and subsection (r)(2) do not apply to aerosol coatings, Department of Defense classified coatings, or the use of separate formulations of primers, topcoats, and chemical milling maskants, or the use of separate formulations of aerospace specialty coatings, in volumes of less than 50 gallons per year, subject to a maximum exemption of 200 gallons for all such formulations applied annually. The coating limitations in subsection (r)(2) do not apply to aerosol coatings or Department of Defense classified coatings.

- 1) VOM Content Limitations for Primers, Topcoats, and Chemical Milling Maskants

	kg/l	lb/gal
A) Aerospace primer	0.350	(2.9)
B) Primer for general aviation rework facility	0.540	(4.5)
C) Exterior primer for large commercial aircraft (components or fully assembled)	0.650	(5.4)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

D)	Topcoat	0.420	(3.5)
E)	Topcoat for general aviation rework facility	0.540	(4.5)
F)	Self-priming topcoat for aerospace applications	0.420	(3.5)
G)	Self-priming topcoat for general aviation rework facility	0.540	(4.5)
H)	Chemical milling maskant, type I	0.662	(5.2)
I)	Chemical milling maskant, type II	0.160	(1.3)

2) VOM Content Limitations for Aerospace Specialty Coatings

		kg/l	lb/gal
A)	Ablative coating	0.600	(5.0)
B)	Adhesion promoter for aerospace applications	0.890	(7.4)
C)	Adhesive bonding primer cured above 250 °F	1.030	(8.6)
D)	Adhesive bonding primer cured at or below 250 °F	0.850	(7.1)
E)	Aerospace flexible primer	0.640	(5.3)
F)	Aerospace pretreatment coating	0.780	(6.5)
G)	Antichafe coating	0.660	(5.5)
H)	Bearing coating	0.620	(5.2)
I)	Bonding maskant	1.230	(10.3)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

J)	Caulking and smoothing compounds	0.850	(7.1)
K)	Chemical agent-resistant coating	0.550	(4.6)
L)	Clear coating for aerospace applications	0.720	(6.0)
M)	Commercial exterior aerodynamic structure primer	0.650	(5.4)
N)	Commercial interior adhesive	0.760	(6.3)
O)	Compatible substrate primer	0.780	(6.5)
P)	Corrosion prevention system	0.710	(5.9)
Q)	Critical use and line sealer maskant	1.020	(8.5)
R)	Cryogenic flexible primer	0.645	(5.4)
S)	Cryoprotective coating	0.600	(5.0)
T)	Cyanoacrylate adhesive	1.020	(8.5)
U)	Dry lubricative material for aerospace applications	0.880	(7.3)
V)	Electrostatic discharge and electromagnetic interference coating	0.800	(6.7)
W)	Elevated temperature Skydrol-resistant commercial primer	0.740	(6.2)
X)	Epoxy-polyamide topcoat	0.660	(5.5)
Y)	Extrudable, rollable, or brushable sealant for aerospace applications	0.280	(2.3)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

Z)	Fire-resistant interior coating	0.800	(6.7)
AA)	Flight test coatings: missile or single use aircraft	0.420	(3.5)
BB)	Flight test coatings: all other	0.840	(7.0)
CC)	Fuel tank adhesive for aerospace applications	0.620	(5.2)
DD	Fuel tank coating for aerospace applications	0.720	(6.0)
EE)	High temperature coating	0.850	(7.1)
FF)	Insulation covering	0.740	(6.2)
GG)	Intermediate release coating	0.750	(6.3)
HH)	Lacquer	0.830	(6.9)
II)	Metallized epoxy coating	0.740	(6.2)
JJ)	Mold release coating for aerospace applications	0.780	(6.5)
KK)	Nonstructural adhesive for aerospace applications	0.360	(3.0)
LL)	Optical anti-reflective coating	0.750	(6.3)
MM)	Part marking aerospace coating	0.850	(7.1)
NN)	Radiation-effect or electric coating	0.800	(6.7)
OO)	Rain erosion-resistant coating	0.850	(7.1)
PP)	Rocket motor bonding adhesive	0.890	(7.4)
QQ)	Rocket motor nozzle coating	0.660	(5.5)

ILLINOIS REGISTER

POLLUTION CONTROL BOARD

NOTICE OF ADOPTED AMENDMENT

RR)	Rubber-based adhesive	0.850	(7.1)
SS)	Scale inhibitor	0.880	(7.3)
TT)	Screen print ink for aerospace applications	0.840	(7.0)
UU)	Seal coat maskant	1.230	(10.3)
VV)	Sprayable sealant for aerospace applications	0.600	(5.0)
WW)	Silicone insulation material	0.850	(7.1)
XX)	Solid film lubricant	0.880	(7.3)
YY)	Specialized function coating	0.890	(7.4)
ZZ)	Structural autoclavable adhesive for aerospace applications	0.060	(0.5)
AAA)	Structural nonautoclavable adhesive for aerospace applications	0.850	(7.1)
BBB)	Temporary protective coating for aerospace applications	0.320	(2.7)
CCC)	Thermal control coating for aerospace applications	0.800	(6.7)
DDD)	Wet fastener installation coating	0.675	(5.6)
EEE)	Wing coating	0.850	(7.1)

(Source: Amended at 50 Ill. Reg. _____, effective _____)

TITLE 35: ENVIRONMENTAL PROTECTION
SUBTITLE B: AIR POLLUTION
CHAPTER I: POLLUTION CONTROL BOARD
SUBCHAPTER c: EMISSIONS STANDARDS AND LIMITATIONS
FOR STATIONARY SOURCES

PART 219
ORGANIC MATERIAL EMISSION STANDARDS AND LIMITATIONS
FOR THE METRO EAST AREA

SUBPART A: GENERAL PROVISIONS

Section	
219.100	Introduction
219.101	Savings Clause
219.102	Abbreviations and Conversion Factors
219.103	Applicability
219.104	Definitions
219.105	Test Methods and Procedures
219.106	Compliance Dates
219.107	Operation of Afterburners
219.108	Exemptions, Variations, and Alternative Means of Control or Compliance Determinations
219.109	Vapor Pressure of Volatile Organic Liquids
219.110	Vapor Pressure of Organic Material or Solvent
219.111	Vapor Pressure of Volatile Organic Material
219.112	Incorporations by Reference
219.113	Monitoring for Negligibly-Reactive Compounds

SUBPART B: ORGANIC EMISSIONS FROM STORAGE AND LOADING OPERATIONS

Section	
219.119	Applicability for VOL
219.120	Control Requirements for Storage Containers of VOL
219.121	Storage Containers of VPL
219.122	Loading Operations
219.123	Petroleum Liquid Storage Tanks
219.124	External Floating Roofs
219.125	Compliance Dates
219.126	Compliance Plan (Repealed)
219.127	Testing VOL Operations
219.128	Monitoring VOL Operations

219.129 Recordkeeping and Reporting for VOL Operations

SUBPART C: ORGANIC EMISSIONS FROM MISCELLANEOUS EQUIPMENT

Section

- 219.141 Separation Operations
- 219.142 Pumps and Compressors
- 219.143 Vapor Blowdown
- 219.144 Safety Relief Valves

SUBPART E: SOLVENT CLEANING

Section

- 219.181 Solvent Cleaning Degreasing Operations
- 219.182 Cold Cleaning
- 219.183 Open Top Vapor Degreasing
- 219.184 Conveyorized Degreasing
- 219.185 Compliance Schedule (Repealed)
- 219.186 Test Methods
- 219.187 Other Industrial Solvent Cleaning Operations

SUBPART F: COATING OPERATIONS

Section

- 219.204 Emission Limitations
- 219.205 Daily-Weighted Average Limitations
- 219.206 Solids Basis Calculation
- 219.207 Alternative Emission Limitations
- 219.208 Exemptions From Emission Limitations
- 219.209 Exemption From General Rule on Use of Organic Material
- 219.210 Compliance Schedule
- 219.211 Recordkeeping and Reporting
- 219.212 Cross-Line Averaging to Establish Compliance for Coating Lines
- 219.213 Recordkeeping and Reporting for Cross-Line Averaging Participating Coating Lines
- 219.214 Changing Compliance Methods
- 219.215 Wood Furniture Coating Averaging Approach
- 219.216 Wood Furniture Coating Add-On Control Use
- 219.217 Wood Furniture Coating and Flat Wood Paneling Coating Work Practice Standards
- 219.218 Work Practice Standards for Paper Coatings, Metal Furniture Coatings, and Large Appliance Coatings

- 219.219 Work Practice Standards for Aerospace Facilities, Automobile and Light-Duty Truck Assembly Coatings, and Miscellaneous Metal and Plastic Parts Coatings

SUBPART G: USE OF ORGANIC MATERIAL

Section

- 219.301 Use of Organic Material
219.302 Alternative Standard
219.303 Fuel Combustion Emission Units
219.304 Operations with Compliance Program

SUBPART H: PRINTING AND PUBLISHING

Section

- 219.401 Flexographic and Rotogravure Printing
219.402 Applicability
219.403 Compliance Schedule
219.404 Recordkeeping and Reporting
219.405 Lithographic Printing: Applicability
219.406 Provisions Applying to Heatset Web Offset Lithographic Printing Prior to March 15, 1996 (Repealed)
219.407 Emission Limitations and Control Requirements for Lithographic Printing Lines
219.408 Compliance Schedule for Lithographic Printing On and After March 15, 1996 (Repealed)
219.409 Testing for Lithographic Printing
219.410 Monitoring Requirements for Lithographic Printing
219.411 Recordkeeping and Reporting for Lithographic Printing
219.412 Letterpress Printing Lines: Applicability
219.413 Emission Limitations and Control Requirements for Letterpress Printing Lines
219.415 Testing for Letterpress Printing Lines
219.416 Monitoring Requirements for Letterpress Printing Lines
219.417 Recordkeeping and Reporting for Letterpress Printing Lines

SUBPART Q: SYNTHETIC ORGANIC CHEMICAL AND
POLYMER MANUFACTURING PLANT

Section

- 219.421 General Requirements
219.422 Inspection Program Plan for Leaks
219.423 Inspection Program for Leaks
219.424 Repairing Leaks
219.425 Recordkeeping for Leaks

219.426	Report for Leaks
219.427	Alternative Program for Leaks
219.428	Open-Ended Valves
219.429	Standards for Control Devices
219.430	Compliance Date (Repealed)
219.431	Applicability
219.432	Control Requirements
219.433	Performance and Testing Requirements
219.434	Monitoring Requirements
219.435	Recordkeeping and Reporting Requirements
219.436	Compliance Date

SUBPART R: PETROLEUM REFINING AND
RELATED INDUSTRIES; ASPHALT MATERIALS

Section	
219.441	Petroleum Refinery Waste Gas Disposal
219.442	Vacuum Producing Systems
219.443	Wastewater (Oil/Water) Separator
219.444	Process Unit Turnarounds
219.445	Leaks: General Requirements
219.446	Monitoring Program Plan for Leaks
219.447	Monitoring Program for Leaks
219.448	Recordkeeping for Leaks
219.449	Reporting for Leaks
219.450	Alternative Program for Leaks
219.451	Sealing Device Requirements
219.452	Compliance Schedule for Leaks
219.453	Compliance Dates (Repealed)

SUBPART S: RUBBER AND MISCELLANEOUS PLASTIC PRODUCTS

Section	
219.461	Manufacture of Pneumatic Rubber Tires
219.462	Green Tire Spraying Operations
219.463	Alternative Emission Reduction Systems
219.464	Emission Testing
219.465	Compliance Dates (Repealed)
219.466	Compliance Plan (Repealed)

SUBPART T: PHARMACEUTICAL MANUFACTURING

Section

219.480	Applicability
219.481	Control of Reactors, Distillation Units, Crystallizers, Centrifuges and Vacuum Dryers
219.482	Control of Air Dryers, Production Equipment Exhaust Systems and Filters
219.483	Material Storage and Transfer
219.484	In-Process Tanks
219.485	Leaks
219.486	Other Emission Units
219.487	Testing
219.488	Monitoring for Air Pollution Control Equipment
219.489	Recordkeeping for Air Pollution Control Equipment

SUBPART V: BATCH OPERATIONS AND AIR OXIDATION PROCESSES

Section

219.500	Applicability for Batch Operations
219.501	Control Requirements for Batch Operations
219.502	Determination of Uncontrolled Total Annual Mass Emissions and Actual Weighted Average Flow Rate Values for Batch Operations
219.503	Performance and Testing Requirements for Batch Operations
219.504	Monitoring Requirements for Batch Operations
219.505	Reporting and Recordkeeping for Batch Operations
219.506	Compliance Date
219.520	Emission Limitations for Air Oxidation Processes
219.521	Definitions (Repealed)
219.522	Savings Clause
219.523	Compliance
219.524	Determination of Applicability
219.525	Emission Limitations for Air Oxidation Processes (Renumbered)
219.526	Testing and Monitoring
219.527	Compliance Date (Repealed)

SUBPART W: AGRICULTURE

Section

219.541	Pesticide Exception
---------	---------------------

SUBPART X: CONSTRUCTION

Section

219.561	Architectural Coatings
---------	------------------------

- 219.562 Paving Operations
- 219.563 Cutback Asphalt

SUBPART Y: GASOLINE DISTRIBUTION

Section

- 219.581 Bulk Gasoline Plants
- 219.582 Bulk Gasoline Terminals
- 219.583 Gasoline Dispensing Operations – Storage Tank Filling Operations
- 219.584 Gasoline Delivery Vessels
- 219.585 Gasoline Volatility Standards (Repealed)
- 219.586 Gasoline Dispensing Operations – Motor Vehicle Fueling Operations (Repealed)

SUBPART Z: DRY CLEANERS

Section

- 219.601 Perchloroethylene Dry Cleaners (Repealed)
- 219.602 Exemptions (Repealed)
- 219.603 Leaks (Repealed)
- 219.604 Compliance Dates (Repealed)
- 219.605 Compliance Plan (Repealed)
- 219.606 Exception to Compliance Plan (Repealed)
- 219.607 Standards for Petroleum Solvent Dry Cleaners
- 219.608 Operating Practices for Petroleum Solvent Dry Cleaners
- 219.609 Program for Inspection and Repair of Leaks
- 219.610 Testing and Monitoring
- 219.611 Exemption for Petroleum Solvent Dry Cleaners
- 219.612 Compliance Dates (Repealed)
- 219.613 Compliance Plan (Repealed)

SUBPART AA: PAINT AND INK MANUFACTURING

Section

- 219.620 Applicability
- 219.621 Exemption for Waterbase Material and Heatset-Offset Ink
- 219.623 Permit Conditions
- 219.624 Open-Top Mills, Tanks, Vats or Vessels
- 219.625 Grinding Mills
- 219.626 Storage Tanks
- 219.628 Leaks
- 219.630 Clean Up
- 219.636 Compliance Schedule

219.637 Recordkeeping and Reporting

SUBPART BB: POLYSTYRENE PLANTS

Section

- 219.640 Applicability
- 219.642 Emissions Limitation at Polystyrene Plants
- 219.644 Emissions Testing

SUBPART FF: BAKERY OVENS

Section

- 219.720 Applicability (Repealed)
- 219.722 Control Requirements (Repealed)
- 219.726 Testing (Repealed)
- 219.727 Monitoring (Repealed)
- 219.728 Recordkeeping and Reporting (Repealed)
- 219.729 Compliance Date (Repealed)
- 219.730 Certification (Repealed)

SUBPART GG: MARINE TERMINALS

Section

- 219.760 Applicability
- 219.762 Control Requirements
- 219.764 Compliance Certification
- 219.766 Leaks
- 219.768 Testing and Monitoring
- 219.770 Recordkeeping and Reporting

SUBPART HH: MOTOR VEHICLE REFINISHING

Section

- 219.780 Emission Limitations
- 219.782 Alternative Control Requirements
- 219.784 Equipment Specifications
- 219.786 Surface Preparation Materials
- 219.787 Work Practices
- 219.788 Testing
- 219.789 Monitoring and Recordkeeping for Control Devices
- 219.790 General Recordkeeping and Reporting (Repealed)
- 219.791 Compliance Date

219.792	Registration (Repealed)
219.875	Applicability of Subpart BB (Renumbered)
219.877	Emissions Limitation at Polystyrene Plants (Renumbered)
219.879	Compliance Date (Repealed)
219.881	Compliance Plan (Repealed)
219.883	Special Requirements for Compliance Plan (Repealed)
219.886	Emissions Testing (Renumbered)

SUBPART II: FIBERGLASS BOAT MANUFACTURING MATERIALS

Section

219.890	Applicability
219.891	Emission Limitations and Control Requirements
219.892	Testing and Monitoring Requirements
219.894	Recordkeeping and Reporting Requirements

SUBPART JJ: MISCELLANEOUS INDUSTRIAL ADHESIVES

Section

219.900	Applicability
219.901	Emission Limitations and Control Requirements
219.902	Testing Requirements
219.903	Monitoring Requirements
219.904	Recordkeeping and Reporting Requirements

SUBPART PP: MISCELLANEOUS FABRICATED PRODUCT MANUFACTURING PROCESSES

Section

219.920	Applicability
219.923	Permit Conditions
219.926	Control Requirements
219.927	Compliance Schedule
219.928	Testing

SUBPART QQ: MISCELLANEOUS FORMULATION MANUFACTURING PROCESSES

Section

219.940	Applicability
219.943	Permit Conditions
219.946	Control Requirements

- 219.947 Compliance Schedule
- 219.948 Testing

SUBPART RR: MISCELLANEOUS ORGANIC CHEMICAL
MANUFACTURING PROCESSES

- Section
- 219.960 Applicability
 - 219.963 Permit Conditions
 - 219.966 Control Requirements
 - 219.967 Compliance Schedule
 - 219.968 Testing

SUBPART TT: OTHER EMISSION UNITS

- Section
- 219.980 Applicability
 - 219.983 Permit Conditions
 - 219.986 Control Requirements
 - 219.987 Compliance Schedule
 - 219.988 Testing

SUBPART UU: RECORDKEEPING AND REPORTING

- Section
- 219.990 Exempt Emission Units
 - 219.991 Subject Emission Units

- 219.APPENDIX A List of Chemicals Defining Synthetic Organic Chemical and Polymer Manufacturing
- 219.APPENDIX B VOM Measurement Techniques for Capture Efficiency (Repealed)
- 219.APPENDIX C Reference Methods and Procedures
- 219.APPENDIX D Coefficients for the Total Resource Effectiveness Index (TRE) Equation
- 219.APPENDIX E List of Affected Marine Terminals
- 219.APPENDIX G TRE Index Measurements for SOCM I Reactors and Distillation Units
- 219.APPENDIX H Baseline VOM Content Limitations for Subpart F, Section 219.212 Cross-Line Averaging

AUTHORITY: Implementing Section 10 and authorized by Sections 27, 28 and 28.5 of the Environmental Protection Act [415 ILCS 5/10, 27, 28 and 28.5].

SOURCE: Adopted in R91-8 at 15 Ill. Reg. 12491, effective August 16, 1991; amended in R91-24 at 16 Ill. Reg. 13597, effective August 24, 1992; amended in R91-30 at 16 Ill. Reg. 13883, effective August 24, 1992; emergency amendment in R93-12 at 17 Ill. Reg. 8295, effective May 24, 1993, for a maximum of 150 days; amended in R93-9 at 17 Ill. Reg. 16918, effective September 27, 1993 and October 21, 1993; amended in R93-28 at 18 Ill. Reg. 4242, effective March 3, 1994; amended in R94-12 at 18 Ill. Reg. 14987, effective September 21, 1994; amended in R94-15 at 18 Ill. Reg. 16415, effective October 25, 1994; amended in R94-16 at 18 Ill. Reg. 16980, effective November 15, 1994; emergency amendment in R95-10 at 19 Ill. Reg. 3059, effective February 28, 1995, for a maximum of 150 days; amended in R94-21, R94-31 and R94-32 at 19 Ill. Reg. 6958, effective May 9, 1995; amended in R94-33 at 19 Ill. Reg. 7385, effective May 22, 1995; amended in R96-2 at 20 Ill. Reg. 3848, effective February 15, 1996; amended in R96-13 at 20 Ill. Reg. 14462, effective October 28, 1996; amended in R97-24 at 21 Ill. Reg. 7721, effective June 9, 1997; amended in R97-31 at 22 Ill. Reg. 3517, effective February 2, 1998; amended in R04-12/20 at 30 Ill. Reg. 9799, effective May 15, 2006; amended in R06-21 at 31 Ill. Reg. 7110, effective April 30, 2007; amended in R10-10 at 34 Ill. Reg. 5392, effective March 23, 2010; amended in R10-8 at 34 Ill. Reg. 9253, effective June 25, 2010; amended in R10-20 at 34 Ill. Reg. 14326, effective September 14, 2010; amended in R10-8(A) at 35 Ill. Reg. 496, effective December 21, 2010; amended in R11-23 at 35 Ill. Reg. 13676, effective July 27, 2011; amended in R11-23(A) at 35 Ill. Reg. 18830, effective October 25, 2011; amended in R12-24 at 37 Ill. Reg. 1722, effective January 28, 2013; amended in R13-18 at 38 Ill. Reg. 1061, effective December 23, 2013; amended in R21-18 at 45 Ill. Reg. 3553, effective March 4, 2021; amended in R25-25 at 50 Ill. Reg. _____, effective _____.

SUBPART F: COATING OPERATIONS

Section 219.204 Emission Limitations

Except as provided in Sections 219.205, 219.207, 219.208, 219.212, 219.215 and 219.216, an owner or operator of a coating line must not apply at any time any coating in which the VOM content exceeds the following emission limitations for the specified coating. Except as otherwise provided in subsections (a), (c), (g), (h), (j), (l), (n), (o), (q), and (r), compliance with the emission limitations marked with an asterisk in this Section is required on and after March 15, 1996, and compliance with emission limitations not marked with an asterisk is required until March 15, 1996. The following emission limitations are expressed in units of VOM per volume of coating (minus water and any compounds which are specifically exempted from the definition of VOM) as applied at each coating applicator, except where noted. Compounds which are specifically exempted from the definition of VOM should be treated as water for the purpose of calculating the "less water" part of the coating composition. Compliance with this Subpart must be demonstrated through the applicable coating analysis test methods and procedures specified in Section 219.105(a) and the recordkeeping and reporting requirements specified in Section 219.211(c) except where noted. (Note: The equation presented in Section 219.206 must be used to calculate emission limitations for determining compliance by add-on controls, credits for

transfer efficiency, emissions trades and cross-line averaging.) The emission limitations are as follows:

a)	Automobile or Light-Duty Truck Coating	kg/l	lb/gal
1)	Prior to May 1, 2012:		
A)	Prime coat	0.14	(1.2)
		0.14*	(1.2)*
B)	Primer surface coat	1.81	(15.1)
		1.81*	(15.1)*

BOARD NOTE: The primer surface coat limitation is in units of kg (lbs) of VOM per l (gal) of coating solids deposited. Compliance with the limitation must be based on the daily-weighted average from an entire primer surface operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(A) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the primer surface limitation.

C)	Topcoat	kg/l	lb/gal
		1.81	(15.1)
		1.81*	(15.1)*

BOARD NOTE: The topcoat limitation is in units of kg (lbs) of VOM per l (gal) of coating solids deposited. Compliance with the limitation must be based on the daily-weighted average from an entire topcoat operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(A) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the topcoat limitation.

D)	Final repair coat	kg/l	lb/gal
		0.58	(4.8)
		0.58*	(4.8)*

- 2) On and after May 1, 2012, subject automobile and light-duty truck coating lines must comply with the following limitations. These limitations must not apply to materials supplied in containers with a net volume of 0.47 liters (16 oz) or less, or a net weight of 0.45 kg (1 lb) or less:

- A) Electrodeposition primer (EDP) operations. For purposes of this subsection (a)(2)(A), "electrodeposition" means a water-borne dip coating process in which opposite electrical charges are applied to the substrate and the coating. The coating is attracted to the substrate due to the electrochemical potential difference that is created.

	kg VOM/l coating solids applied	lb VOM/gal coating solids applied
i) When solids turnover ratio (R_T) is greater than or equal to 0.160	0.084	(0.7)
ii) When R_T is greater than or equal to 0.040 and less than 0.160	$0.084 \times 350^{0.160-R_T}$	$(0.084 \times 350^{0.160-R_T} \times 8.34)$

- B) Primer surfacer operations

	kg VOM/l coating solids deposited	lb VOM/gal coating solids deposited
i) VOM content limitation	1.44	(12.0)
ii) Compliance with the limitation in subsection (a)(2)(B)(i) must be based on the daily-weighted average from an entire primer surfacer operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(B) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and		

USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the primer surfacer limitation.

C) Topcoat operations

kg VOM/l coating solids deposited	lb VOM/gal coating solids deposited
--	---

i) VOM content limitation	1.44	(12.0)
---------------------------	------	--------

ii) Compliance with the limitation in subsection (a)(2)(C)(i) must be based on the daily-weighted average from an entire topcoat operation. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(B) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the topcoat limitation.

D) Combined primer surfacer and topcoat operations

kg VOM/l coating solids deposited	lb VOM/gal coating solids deposited
--	---

i) VOM content limitation	1.44	(12.0)
---------------------------	------	--------

ii) Compliance with the limitation in subsection (a)(2)(D)(i) must be based on the daily-weighted average from the combined primer surfacer and topcoat operations. Compliance must be demonstrated in accordance with the topcoat protocol referenced in Section 219.105(b)(1)(B) and the recordkeeping and reporting requirements specified in Section 219.211(f). Testing to demonstrate compliance must be performed in accordance with the topcoat protocol and a detailed testing proposal approved by the Agency and

USEPA specifying the method of demonstrating compliance with the protocol. Section 219.205 does not apply to the combined primer surfacer and topcoat limitation.

E) Final repair coat operations

- | | kg/l
coatings | lb/gal
coatings |
|--|------------------|--------------------|
| i) VOM content limitation | 0.58 | (4.8) |
| ii) Compliance with the final repair operations limitation in subsection (a)(2)(E)(i) must be on an occurrence-weighted average basis, calculated in accordance with the equation below, in which clear coatings must have a weighting factor of 2 and all other coatings must have a weighting factor of 1. For purposes of this subsection (a)(2)(E)(ii), an "occurrence" is the application of the combination of coatings that constitute a final repair coat for a single automobile or light-duty truck. Section 219.205 does not apply to the final repair coat limitation. | | |

$$VOM_{tot} = \frac{2VOM_{cc} + \sum_{i=1}^n VOM_i}{n + 2}$$

where:

VOM_{tot} = Total VOM content of all coatings, as applied, on an occurrence weighted average basis, and used to determine compliance with this subsection (a)(2)(E).

i = Subscript denoting a specific coating applied.

n = Total number of coatings applied in the final repair operation, other than clear coatings.

VOM_{cc} = The VOM content, as applied, of the clear coat used in the final repair operation.

VOM_i = The VOM content of each coating used in the final repair operation, as applied, other than clear coatings.

- F) Miscellaneous Materials. For reactive adhesives subject to this subsection (a)(2)(F), compliance must be demonstrated in accordance with the methods and procedures set forth in appendix A to Subpart PPPP of 40 CFR 63, incorporated by reference in Section 219.112.

		kg/l	lb/gal
	i) Glass bonding primer	0.90	(7.51)
	ii) Adhesive	0.25	(2.09)
	iii) Cavity wax	0.65	(5.42)
	iv) Trunk sealer	0.65	(5.42)
	v) Deadener	0.65	(5.42)
	vi) Gasket/gasket sealing material	0.20	(1.67)
	vii) Underbody coating	0.65	(5.42)
	viii) Trunk interior coating	0.65	(5.42)
	ix) Bedliner	0.20	(1.67)
	x) Weatherstrip adhesive	0.75	(6.26)
	xi) Lubricating wax/compound	0.70	(5.84)
b)	Can Coating	kg/l	lb/gal
1)	Sheet basecoat and overvarnish		
	A) Sheet basecoat	0.34	(2.8)
		0.26*	(2.2)*
	B) Overvarnish	0.34	(2.8)
		0.34	(2.8)*
2)	Exterior basecoat and overvarnish	0.34	(2.8)

SUBTITLE B

SUBCHAPTER c

		0.25*	(2.1)*
3)	Interior body spray coat		
	A) Two piece	0.51	(4.2)
		0.44*	(3.7)*
	B) Three piece	0.51	(4.2)
		0.51*	(4.2)*
4)	Exterior end coat	0.51	(4.2)
		0.51*	(4.2)*
5)	Side seam spray coat	0.66	(5.5)
		0.66*	(5.5)*
6)	End sealing compound coat	0.44	(3.7)
		0.44*	(3.7)*
c)	Paper Coating		
1)	Prior to May 1, 2011:	kg/l	lb/gal
		0.28	(2.3)
2)	On and after May 1, 2011:	kg VOM/kg (lb VOM/lb) solids applied	kg VOM/kg (lb VOM/lb) coatings applied
	A) Pressure sensitive tape and label surface coatings	0.20	(0.067)
	B) All other paper coatings	0.40	(0.08)
3)	The paper coating limitation in this subsection (c) does not apply to any owner or operator of any paper coating line on which flexographic, rotogravure, lithographic, or letterpress printing is performed if the paper coating line complies with the applicable emissions limitations in Subpart H. In addition, screen printing on paper is not regulated as paper coating, but is regulated under Subpart TT. On and after May 1, 2011, the paper coating limitation also does not apply to coating performed on or in-line with any digital printing press, or to size presses and on-machine coaters on papermaking machines applying sizing or water-based clays.		

SUBTITLE B

SUBCHAPTER c

d)	Coil Coating	kg/l 0.31 0.20*	lb/gal (2.6) (1.7)*
e)	Fabric Coating	0.35 0.28*	(2.9) (2.3)*
f)	Vinyl Coating	0.45 0.28*	(3.8) (2.3)*
g)	Metal Furniture Coating		
1)	Prior to May 1, 2011:	kg/l	lb/gal
	A) Air dried	0.34	(2.8)
	B) Baked	0.28	(2.3)
2)	On and after May 1, 2011:	kg/l (lb/gal)	kg/l (lb/gal) solids applied
	A) General, One Component	0.275 (2.3)	0.40 (3.3)
	B) General, Multi-Component		
	i) Air dried	0.340 (2.8)	0.55 (4.5)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
	C) Extreme High Gloss		
	i) Air dried	0.340 (2.8)	0.55 (4.5)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
	D) Extreme Performance		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360	0.61

SUBTITLE B

SUBCHAPTER c

		(3.0)	(5.1)
E)	Heat Resistant		
i)	Air dried	0.420 (3.5)	0.80 (6.7)
ii)	Baked	0.360 (3.0)	0.61 (5.1)
F)	Metallic	0.420 (3.5)	0.80 (6.7)
G)	Pretreatment Coatings	0.420 (3.5)	0.80 (6.7)
H)	Solar Absorbent		
i)	Air dried	0.420 (3.5)	0.80 (6.7)
ii)	Baked	0.360 (3.0)	0.61 (5.1)
3)	On and after May 1, 2011, the limitations in this subsection (g) do not apply to stencil coatings, safety-indicating coatings, solid-film lubricants, electric-insulating and thermal-conducting coatings, touch-up and repair coatings, or coating applications utilizing hand-held aerosol cans.		
h)	Large Appliance Coating		
1)	Prior to May 1, 2011:	kg/l	lb/gal
A)	Air dried	0.34	(2.8)
B)	Baked	0.28	(2.3)
2)	On and after May 1, 2011:	kg/l (lb/gal)	kg/l (lb/gal) solids applied
A)	General, One Component	0.275 (2.3)	0.40 (3.3)
B)	General, Multi-Component		
i)	Air dried	0.340	0.55

SUBTITLE B

SUBCHAPTER c

		(2.8)	(4.5)
	ii) Baked	0.275 (2.3)	0.40 (3.3)
C)	Extreme High Gloss		
	i) Air dried	0.340 (2.8)	0.55 (4.5)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
D)	Extreme Performance		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
E)	Heat Resistant		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360 (3.0)	0.61 (5.1)
F)	Metallic	0.420 (3.5)	0.80 (6.7)
G)	Pretreatment Coatings	0.420 (3.5)	0.80 (6.7)
H)	Solar Absorbent		
	i) Air dried	0.420 (3.5)	0.80 (6.7)
	ii) Baked	0.360	0.61
3)	The limitations in this subsection (h) do not apply to the use of quick-drying lacquers for repair of scratches and nicks that occur during assembly, provided that the volume of coating does not exceed 0.95 l (1 quart) in any one rolling eight-hour period. On and after May 1, 2011, these limitations also do not apply to stencil coatings, safety-indicating		

SUBTITLE B

SUBCHAPTER c

coatings, solid-film lubricants, electric-insulating and thermal-conducting coatings, touch-up and repair coatings, or coating applications utilizing hand-held aerosol cans.

i)	Magnet Wire Coating	kg/l 0.20 0.20*	lb/gal (1.7) (1.7)*
j)	Prior to May 1, 2012: Miscellaneous Metal Parts and Products Coating		
1)	Clear coating	0.52 0.52*	(4.3) (4.3)*
2)	Extreme performance coating		
A)	Air dried	0.42 0.42*	(3.5) (3.5)*
B)	Baked	0.42 0.40*	(3.5) (3.3)*
3)	Steel pail and drum interior coating	0.52 0.52*	(4.3) (4.3)*
4)	All other coatings		
A)	Air dried	0.42 0.40*	(3.5) (3.3)*
B)	Baked	0.36 0.34*	(3.0) (2.8)*
5)	Metallic Coating		
A)	Air dried	0.42 0.42*	(3.5) (3.5)*
B)	Baked	0.36 0.36	(3.0) (3.0)*
6)	For purposes of subsection (j)(5), "metallic coating" means a coating which contains more than ¼ lb/gal of metal particles, as applied.		

BOARD NOTE: On and after May 1, 2012, the limitations in Section 219.204(q) apply to this category of coating.

k)	Heavy Off-Highway Vehicle Products Coating	kg/l	lb/gal
1)	Extreme performance prime coat	0.42	(3.5)
		0.42*	(3.5)*
2)	Extreme performance topcoat (air dried)	0.42	(3.5)
		0.42*	(3.5)*
3)	Final repair coat (air dried)	0.42	(3.5)
		0.42*	(3.5)*
4)	All other coatings are subject to the emission limitations for miscellaneous metal parts and products coatings in subsection (j).		
l)	Wood Furniture Coating		
1)	Limitations before March 15, 1998:	kg/l	lb/gal
A)	Clear topcoat	0.67	(5.6)
B)	Opaque stain	0.56	(4.7)
C)	Pigmented coat	0.60	(5.0)
D)	Repair coat	0.67	(5.6)
E)	Sealer	0.67	(5.6)
F)	Semi-transparent stain	0.79	(6.6)
G)	Wash coat	0.73	(6.1)

BOARD NOTE: Prior to March 15, 1998, an owner or operator of a wood furniture coating operation subject to this Section must apply all coatings, with the exception of no more than 37.8 l (10 gal) of coating per day used for touch-up and repair operations, using one or more of the following application systems: airless spray application system, air-assisted airless spray application system, electrostatic spray application system, electrostatic bell or disc spray application system, heated airless spray application system, roller coating, brush or wipe coating application system, dip coating application system or high volume low pressure (HVLP) application system.)

- 2) On and after March 15, 1998, wood furniture sealers and topcoats must comply with one of the limitations specified in subsections (1)(2)(A) through (E):

		kg VOM/kg solids	lb VOM/lb solids
A)	Topcoat	0.8	(0.8)
B)	Sealers and topcoats with the following limits:		
i)	Sealer other than acid-cured alkyd amino vinyl sealer	1.9	(1.9)
ii)	Topcoat other than acid-cured alkyd amino conversion varnish topcoat	1.8	(1.8)
iii)	Acid-cured alkyd amino vinyl sealer	2.3	(2.3)
iv)	Acid-cured alkyd amino conversion varnish topcoat	2.0	(2.0)
C)	Meet the provisions of Section 219.215 for use of an averaging approach;		
D)	Achieve a reduction in emissions equivalent to the requirements of subsection (1)(2)(A) or (B), as calculated using Section 219.216; or		
E)	Use a combination of the methods specified in subsections (1)(2)(A) through (D).		

- 3) Other wood furniture coating limitations on and after March 15, 1998:

		kg/l	lb/gal
A)	Opaque stain	0.56	(4.7)
B)	Non-topcoat pigmented coat	0.60	(5.0)
C)	Repair coat	0.67	(5.6)
D)	Semi-transparent stain	0.79	(6.6)

- | | | | |
|----|-----------|------|-------|
| E) | Wash coat | 0.73 | (6.1) |
|----|-----------|------|-------|
- 4) Other wood furniture coating requirements on and after March 15, 1998:
- | | | | |
|------|--|--|--|
| A) | A source subject to the limitations of subsection (1), (2) or (3) and utilizing one or more wood furniture coating spray booths must not use strippable spray booth coatings containing more than 0.8 kg VOM/kg solids (0.8 lb VOM/lb solids), as applied. | | |
| B) | Any source subject to the limitations of subsection (1)(2) or (3) must comply with Section 219.217. | | |
| C) | Any source subject to the limitations of subsection (1)(2)(A) or (B) and utilizing one or more continuous coaters, must for each continuous coater, use an initial coating which complies with the limitations of subsection (1)(2)(A) or (B). The viscosity of the coating in each reservoir must always be greater than or equal to the viscosity of the initial coating in the reservoir. The owner or operator must: | | |
| i) | Monitor the viscosity of the coating in the reservoir with a viscosity meter or by testing the viscosity of the initial coating and retesting the coating in the reservoir each time solvent is added; | | |
| ii) | Collect and record the reservoir viscosity and the amount and weight of VOM per weight of solids of coating and solvent each time coating or solvent is added; and | | |
| iii) | Maintain these records at the source for a period of three years. | | |
- | | | | |
|----|---|------|--------|
| m) | Prior to May 1, 2012: Plastic Parts Coating:
Automotive/Transportation | kg/l | lb/gal |
|----|---|------|--------|
- 1) Interiors
- | | | | |
|-----|------------|-------|--------|
| A) | Baked | | |
| i) | Color coat | 0.49* | (4.1)* |
| ii) | Primer | 0.46* | (3.8)* |

SUBTITLE B

SUBCHAPTER c

B)	Air dried			
	i)	Color coat	0.38*	(3.2)*
	ii)	Primer	0.42*	(3.5)*
2)	Exteriors (flexible and non-flexible)			
A)	Baked			
	i)	Primer	0.60*	(5.0)*
	ii)	Primer non-flexible	0.54*	(4.5)*
	iii)	Clear coat	0.52*	(4.3)*
	iv)	Color coat	0.55*	(4.6)*
B)	Air dried			
	i)	Primer	0.66*	(5.5)*
	ii)	Clear coat	0.54*	(4.5)*
	iii)	Color coat (red & black)	0.67*	(5.6)*
	iv)	Color coat (others)	0.61*	(5.1)*
3)	Specialty			
A)	Vacuum metallizing basecoats, texture basecoats		0.66*	(5.5)*
B)	Black coatings, reflective argent coatings, air bag cover coatings, and soft coatings		0.71*	(5.9)*
C)	Gloss reducers, vacuum metallizing topcoats, and texture topcoats		0.77*	(6.4)*
D)	Stencil coatings, adhesion primers, ink pad coatings, electrostatic prep coatings, and resist coatings		0.82*	(6.8)*
E)	Head lamp lens coatings		0.89*	(7.4)*

BOARD NOTE: On and after May 1, 2012, the limitations in Section 219.204(q) apply to this category of coating.

n)	Prior to May 1, 2012: Plastic Parts Coating: Business Machine	kg/l	lb/gal
1)	Primer	0.14*	(1.2)*
2)	Color coat (non-texture coat)	0.28*	(2.3)*
3)	Color coat (texture coat)	0.28*	(2.3)*
4)	Electromagnetic interference/radio frequency interference (EMI/RFI) shielding coatings	0.48*	(4.0)*
5)	Specialty Coatings		
A)	Soft coat	0.52*	(4.3)*
B)	Plating resist	0.71*	(5.9)*
C)	Plating sensitizer	0.85*	(7.1)*

BOARD NOTE: On and after May 1, 2012, the limitations in Section 219.204(q) apply to this category of coating.

- o) Flat Wood Paneling Coatings. On and after August 1, 2010, flat wood paneling coatings must comply with one of the following limitations:
- 1) 0.25 kg VOM/l of coatings (2.1 lb VOM/gal coatings); or
 - 2) 0.35 kg VOM/l solids (2.9 lb VOM/gal solids).

BOARD NOTE: The Board has omitted subsection (p) and adopted a subsection (q) in order to preserve consistent labeling with similar requirements in 35 Ill. Adm. Code 218.

- q) Miscellaneous Metal Parts and Products Coatings and Plastic Parts and Products Coatings On and After May 1, 2012. On and after May 1, 2012, the owner or operator of a miscellaneous metal or plastic parts coating line must comply with the limitations in subsection (q). The limitations in subsection (q) do not apply to aerosol coating products, powder coatings, or primer sealants and ejection cartridge sealants used in ammunition manufacturing. Primer sealants and ejection cartridge sealants are regulated under Subpart TT.

- 1) Metal Parts and Products. For purposes of this subsection (q)(1), "corrosion resistant basecoat" means a water-borne epoxy coating applied via an electrodeposition process to a metal surface prior to spray coating, for the purpose of enhancing corrosion resistance. The limitations in subsection (q)(1) do not apply to stencil coats, safety-indicating coatings, solid-film lubricants, electric-insulating and thermal-conducting coatings, magnetic data storage disk coatings, and plastic extruded onto metal parts to form a coating. The limitations in Section 219.219 apply to these coatings unless specifically excluded.

	kg VOM/l coating solids applied	lb VOM/gal coating solids applied
A) General one component coating		
i) Air dried	0.34 (2.8)	0.54 (4.52)
ii) Baked	0.28 (2.3)	0.40 (3.35)
B) General multi-component coating		
i) Air dried	0.34 (2.8)	0.54 (4.52)
ii) Baked	0.28 (2.3)	0.40 (3.35)
C) Camouflage coating	0.42 (3.5)	0.80 (6.67)
D) Electric-insulating varnish	0.42 (3.5)	0.80 (6.67)
E) Etching filler	0.42 (3.5)	0.80 (6.67)
F) Extreme high-gloss coating		

SUBTITLE B

SUBCHAPTER c

i)	Air dried	0.42 (3.5)	0.80 (6.67)
ii)	Baked	0.36 (3.0)	0.61 (5.06)
G)	Extreme performance coating		
i)	Air dried	0.42 (3.5)	0.80 (6.67)
ii)	Baked	0.36 (3.0)	0.61 (5.06)
H)	Heat-resistant coating		
i)	Air dried	0.42 (3.5)	0.80 (6.67)
ii)	Baked	0.36 (3.0)	0.61 (5.06)
I)	High performance architectural coating	0.42 (3.5)	0.80 (6.67)
J)	High temperature coating	0.42 (3.5)	0.80 (6.67)
K)	Metallic coating		
i)	Air dried	0.42 (3.5)	0.80 (6.67)
ii)	Baked	0.36 (3.0)	0.61 (5.06)
L)	Military specification coating		
i)	Air dried	0.34 (2.8)	0.54 (4.52)
ii)	Baked	0.28	0.40

SUBTITLE B

SUBCHAPTER c

		(2.3)	(3.35)
M)	Mold-seal coating	0.42 (3.5)	0.80 (6.67)
N)	Pan backing coating	0.42 (3.5)	0.80 (6.67)
O)	Prefabricated architectural coating: multi-component		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.28 (2.3)	0.40 (3.35)
P)	Prefabricated architectural coating: one-component		
	i) Air dried	0.42 (3.5)	0.80 (6.67)
	ii) Baked	0.28 (2.3)	0.40 (3.35)
Q)	Pretreatment coating	0.42 (3.5)	0.80 (6.67)
R)	Repair coats and touch-up coatings		
	i) Air dried	0.42 (3.5)	
	ii) Baked	0.36 (3.01)	
S)	Silicone release coating	0.42 (3.5)	0.80 (6.67)
T)	Solar-absorbent coating		

SUBTITLE B

SUBCHAPTER c

i)	Air dried	0.42 (3.5)	0.80 (6.67)
ii)	Baked	0.36 (3.0)	0.61 (5.06)
U)	Vacuum-metalizing coating	0.42 (3.5)	0.80 (6.67)
V)	Drum coating, new, exterior	0.34 (2.8)	0.54 (4.52)
W)	Drum coating, new, interior	0.42 (3.5)	0.80 (6.67)
X)	Drum coating, reconditioned, exterior	0.42 (3.5)	0.80 (6.67)
Y)	Drum coating, reconditioned, interior	0.50 (4.2)	1.17 (9.78)
Z)	Ammunition sealants		
i)	Air dried	0.42 (3.5)	0.80 (6.67)
ii)	Baked	0.36 (3.0)	0.61 (5.06)
AA)	Electrical switchgear compartment coatings		
i)	Air dried	0.42 (3.5)	0.80 (6.67)
ii)	Baked	0.36 (3.0)	0.61 (5.06)
BB)	All other coatings		
i)	Air dried	0.40 (3.3)	0.73 (5.98)

ii) Baked: primer/topcoat	0.34 (2.8)	0.54 (4.52)
---------------------------	---------------	----------------

- 2) Plastic Parts and Products: Miscellaneous. For purposes of this subsection (q)(2), miscellaneous plastic parts and products are plastic parts and products that are not subject to subsection (q)(3), (q)(4), (q)(5), or (q)(6). The limitations in subsection (q)(2) do not apply to touch-up and repair coatings; stencil coats applied on clear or transparent substrates; clear or translucent coatings; coatings applied at a paint manufacturing facility while conducting performance tests on the coatings; any individual coating category used in volumes less than 189.2 liters (50 gallons) in any one calendar year, if the total usage of all such coatings does not exceed 756.9 liters (200 gallons) per calendar year per source and substitute compliant coatings are not available; reflective coatings applied to highway cones; mask coatings that are less than 0.5 mm thick (dried) if the area coated is less than 25 square inches; electromagnetic interference/radio frequency interference (EMI/RFI) shielding coatings; and heparin-benzalkonium chloride (HBAC)-containing coatings applied to medical devices if the total usage of all such coatings does not exceed 378.4 liters (100 gallons) per calendar year per source. The limitations in Section 219.219 apply to these coatings unless specifically excluded.

	kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A) General one component coating	0.28 (2.3)	0.40 (3.35)
B) General multi-component	0.42 (3.5)	0.80 (6.67)
C) Electric dissipating coatings and shock-free coatings	0.80 (6.7)	8.96 (74.7)
D) Extreme performance (2-pack coatings)	0.42 (3.5)	0.80 (6.67)
E) Metallic coating	0.42 (3.5)	0.80 (6.67)

SUBTITLE B

SUBCHAPTER c

F)	Military specification coating		
i)	1-pack coatings	0.28 (2.3)	0.54 (4.52)
ii)	2-pack coatings	0.42 (3.5)	0.80 (6.67)
G)	Mold-seal coating	0.76 (6.3)	5.24 (43.7)
H)	Multi-colored coating	0.68 (5.7)	3.04 (25.3)
I)	Optical coating	0.80 (6.7)	8.96 (74.7)
J)	Vacuum-metalizing coating	0.80 (6.7)	8.96 (74.7)
3)	Plastic Parts and Products Automotive/Transportation		
		kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A)	High bake coatings – interior and exterior parts		
i)	Flexible primer	0.54 (4.5)	1.39 (11.58)
ii)	Non-flexible primer	0.42 (3.5)	0.80 (6.67)
iii)	Basecoats	0.52 (4.3)	1.24 (10.34)
iv)	Clear coat	0.48 (4.0)	1.05 (8.76)

SUBTITLE B

SUBCHAPTER c

v)	Non-basecoat/clear coat	0.52 (4.3)	1.24 (10.34)
B)	Low bake/air dried coatings – exterior parts		
i)	Primers	0.58 (4.8)	1.66 (13.80)
ii)	Basecoat	0.60 (5.0)	1.87 (15.59)
iii)	Clear coats	0.54 (4.5)	1.39 (11.58)
iv)	Non-basecoat/clear coat	0.60 (5.0)	1.87 (15.59)
C)	Low bake/air dried coatings – interior parts		
i)	Color coat	0.38 (3.2)	0.67 (5.66)
ii)	Primer	0.42 (3.5)	0.80 (6.67)
D)	Touchup and repair coatings	0.62 (5.2)	2.13 (17.72)
E)	Specialty		
i)	Vacuum metallizing basecoats	0.66 (5.5)	2.62 (21.8)
ii)	Vacuum metallizing topcoats	0.77 (6.4)	6.06 (49.1)
F)	Red, yellow, and black coatings: Subject coating lines must comply with a limit determined by multiplying the appropriate limit in subsections (q)(3)(A) through (q)(3)(C) by 1.15.		

- 4) Plastic Parts and Products: Business Machine. The limitations of this subsection (q)(4) do not apply to vacuum metallizing coatings, gloss reducers, texture topcoats, adhesion primers, electrostatic preparation coatings, stencil coats, and resist coats other than plating resist coats. The limitations in Section 219.219 apply to these coatings unless specifically excluded.

	kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A) Primers	0.35 (2.9)	0.57 (4.80)
B) Topcoat	0.35 (2.9)	0.57 (4.80)
C) Color coat (texture coat)	0.28 (2.3)	0.40 (4.80)
D) Color coat (non-texture coat)	0.28 (2.3)	0.40 (4.80)
E) Texture coats other than color texture coats	0.35 (2.9)	0.57 (4.80)
F) EMI/RFI shielding coatings	0.48 (4.0)	1.05 (8.76)
G) Fog coat	0.26 (2.2)	0.38 (3.14)
H) Touchup and repair	0.35 (2.9)	0.57 (4.80)

- 5) Pleasure Craft Surface Coatings

	kg/l (lb/gal) coatings	kg/l (lb/gal) solids
A) Extreme high gloss coating –	0.60	1.88

SUBTITLE B

SUBCHAPTER c

	topcoat	(5.0)	(15.6)
B)	High gloss coating – topcoat	0.42 (3.5)	0.80 (6.7)
C)	Pretreatment wash primer	0.78 (6.5)	6.67 (55.6)
D)	Finish primer surfacer		
	Prior to January 1, 2014	0.60 (5.0)	1.88 (15.6)
	On and after January 1, 2014	0.42 (3.5)	0.80 (6.7)
E)	High build primer/surfacer	0.34 (2.8)	0.55 (4.6)
F)	Aluminum substrate antifoulant coating	0.56 (4.7)	1.53 (12.8)
G)	Other substrate antifoulant coating	0.40 (3.3)	0.73 (5.8)
H)	Antifouling Sealer/Tie Coat	0.42 (3.5)	0.80 (6.7)
I)	All other pleasure craft surface coatings for metal or plastic	0.42 (3.5)	0.80 (6.7)
6)	Motor Vehicle Materials		
		kg/l (lb/gal) coatings	
A)	Cavity wax	0.65 (5.42)	
B)	Sealer	0.65 (5.42)	

C)	Deadener	0.65 (5.42)
D)	Gasket/gasket sealing material	0.20 (1.67)
E)	Underbody coating	0.65 (5.42)
F)	Trunk interior coating	0.65 (5.42)
G)	Bedliner	0.20 (1.67)
H)	Lubricating wax/compound	0.70 (5.84)

- r) Aerospace Facilities. On and after July 1, 2021, the owner or operator of an aerospace facility must comply with the coating limitations in this subsection (r). The limitations in this subsection (r) do not apply to the following activities in which coating of aerospace components and vehicles may take place: research and development, quality control, laboratory testing, and electronic parts and assemblies (except for coating of completed assemblies). The limitations in this subsection (r) also do not apply to aerospace facility operations involving space vehicles or rework operations performed on antique aerospace vehicles or components. The coating limitations in subsections (r)(1) and (r)(2) do not apply to the use of separate formulations of primers, topcoats, and chemical milling maskants, or the use of separate formulations of specialty coatings, in volumes of less than 50 gallons per year, subject to a maximum exemption of 200 gallons for all such formulations applied annually. The coating limitations in subsection (r)(2) do not apply to aerosol coatings or Department of Defense classified coatings.

1) VOM Content Limitations for Primers, Topcoats, and Chemical Milling Maskants

		kg/l	lb/gal
A)	Aerospace primer	0.350	(2.9)
B)	Primer for general aviation rework	0.540	(4.5)

SUBTITLE B

SUBCHAPTER c

facility

C)	Exterior primer for large commercial aircraft (components or fully assembled)	0.650	(5.4)
D)	Topcoat	0.420	(3.5)
E)	Topcoat for general aviation rework facility	0.540	(4.5)
F)	Self-priming topcoat for aerospace applications	0.420	(3.5)
G)	Self-priming topcoat for general aviation rework facility	0.540	(4.5)
H)	Chemical milling maskant, type I	0.662	(5.2)
I)	Chemical milling maskant, type II	0.160	(1.3)

2) VOM Content Limitations for Aerospace Specialty Coatings

		kg/l	lb/gal
A)	Ablative coating	0.600	(5.0)
B)	Adhesion promoter for aerospace applications	0.890	(7.4)
C)	Adhesive bonding primer cured above 250 °F	1.030	(8.6)
D)	Adhesive bonding primer cured at or below 250 °F	0.850	(7.1)
E)	Aerospace flexible primer	0.640	(5.3)
F)	Aerospace pretreatment coating	0.780	(6.5)
G)	Antichafe coating	0.660	(5.5)

SUBTITLE B

SUBCHAPTER c

H)	Bearing coating	0.620	(5.2)
I)	Bonding maskant	1.230	(10.3)
J)	Caulking and smoothing compounds	0.850	(7.1)
K)	Chemical agent-resistant coating	0.550	(4.6)
L)	Clear coating for aerospace applications	0.720	(6.0)
M)	Commercial exterior aerodynamic structure primer	0.650	(5.4)
N)	Commercial interior adhesive	0.760	(6.3)
O)	Compatible substrate primer	0.780	(6.5)
P)	Corrosion prevention system	0.710	(5.9)
Q)	Critical use and line sealer maskant	1.020	(8.5)
R)	Cryogenic flexible primer	0.645	(5.4)
S)	Cryoprotective coating	0.600	(5.0)
T)	Cyanoacrylate adhesive	1.020	(8.5)
U)	Dry lubricative material for aerospace applications	0.880	(7.3)
V)	Electrostatic discharge and electromagnetic interference coating	0.800	(6.7)
W)	Elevated temperature Skydrol-resistant commercial primer	0.740	(6.2)
X)	Epoxy-polyamide topcoat	0.660	(5.5)
Y)	Extrudable, rollable, or brushable	0.280	(2.3)

SUBTITLE B

SUBCHAPTER c

sealant for aerospace applications

Z)	Fire-resistant interior coating	0.800	(6.7)
AA)	Flight test coatings: missile or single use aircraft	0.420	(3.5)
BB)	Flight test coatings: all other	0.840	(7.0)
CC)	Fuel tank adhesive for aerospace applications	0.620	(5.2)
DD)	Fuel tank coating for aerospace applications	0.720	(6.0)
EE)	High temperature coating	0.850	(7.1)
FF)	Insulation covering	0.740	(6.2)
GG)	Intermediate release coating	0.750	(6.3)
HH)	Lacquer	0.830	(6.9)
II)	Metallized epoxy coating	0.740	(6.2)
JJ)	Mold release coating for aerospace applications	0.780	(6.5)
KK)	Nonstructural adhesive for aerospace applications	0.360	(3.0)
LL)	Optical anti-reflective coating	0.750	(6.3)
MM)	Part marking aerospace coating	0.850	(7.1)
NN)	Radiation-effect or electric coating	0.800	(6.7)
OO)	Rain erosion-resistant coating	0.850	(7.1)
PP)	Rocket motor bonding adhesive	0.890	(7.4)
QQ)	Rocket motor nozzle coating	0.660	(5.5)

SUBTITLE B

SUBCHAPTER c

RR)	Rubber-based adhesive	0.850	(7.1)
SS)	Scale inhibitor	0.880	(7.3)
TT)	Screen print ink for aerospace applications	0.840	(7.0)
UU)	Seal coat maskant	1.230	(10.3)
VV)	Sprayable sealant for aerospace applications	0.600	(5.0)
WW)	Silicone insulation material	0.850	(7.1)
XX)	Solid film lubricant	0.880	(7.3)
YY)	Specialized function coating	0.890	(7.4)
ZZ	Structural autoclavable adhesive for aerospace applications	0.060	(0.5)
AAA)	Structural nonautoclavable adhesive for aerospace applications	0.850	(7.1)
BBB)	Temporary protective coating for aerospace applications	0.320	(2.7)
CCC)	Thermal control coating for aerospace applications	0.800	(6.7)
DDD)	Wet fastener installation coating	0.675	(5.6)
EEE)	Wing coating	0.850	(7.1)

(Source: Amended at 50 Ill. Reg. _____, effective _____)