ILLINOIS POLLUTION CONTROL BOARD June 5, 1997

IN THE MATTER OF:)	
)	
TIERED APPROACH TO CORRECTIVE)	R97-12 (A)
ACTION OBJECTIVES (TACO): 35 ILL.)	(Rulemaking - Land)
ADM. CODE PART 742)	

Adopted Rule. Final Order.

OPINION AND ORDER OF THE BOARD (by M. McFawn and J. Yi):

The Board adopts today as final, rules which create a tiered approach to establishing corrective action, *i.e.*, remediation objectives, based on risks to human health and the environment, allowing consideration of the proposed land use at a subject site. These rules are located at a new part, 35 Ill. Adm. Code 742, entitled the Tiered Approach to Corrective Action Objectives, and have therefore become known as the TACO rules. Part 742 is unusual because it does not regulate activities at a site or mandate fixed clean up standards. Rather, the TACO rules at Part 742 provide the acceptable methodologies for determining site-specific, risk-based remediation objectives; while the programs to which TACO is applied govern the scope and extent of the site investigation preceding the application of TACO, as well as the no further remediation determination made by the Illinois Environmental Protection Agency (Agency) after the TACO derived remediation objectives are achieved. The TACO rules are to be applied to all types of remediation programs under the Illinois Environmental Protection Act (Act) (415 ILCS 5/1 et seq. (1994)), including the Site Remediation Program adopted today as a new Part 740, and the Underground Storage Tank rules found at Part 732 and the Resource Conservation and Recovery Act programs.

The TACO methodology is premised upon the statutory mandates in the Site Remediation legislation, P.A. 89-431, which was signed and became effective December 15, 1995, and later amended by P.A. 89-443, effective July 1, 1996. The Site Remediation legislation, also known as the Brownfield legislation, added Title XVII to the Act. Title XVII is intended to achieve five objectives. Those objectives are to: 1) establish a risk-based system of remediation based on the protection of human health and the environment relative to present and future use of the land; 2) assure that the land use for which remedial action was undertaken will not be modified without consideration of the adequacy of such remedial action for the new land use; 3) provide incentives for the private sector to undertake remedial action; 4) establish expeditious alternatives for the review of site investigation and remedial activities, including a privatized review process; and 5) assure that the resources of the Hazardous Waste

The Board gratefully acknowledges the efforts of the entire staff throughout this rulemaking, and in particular the concerted efforts of Kevin Desharnais as the hearing officer and attorney-assistant; Charles Feinen and Amy Muran-Felton, attorney-assistants; Anand Rao and Elizabeth Ann of the Technical Unit, and Kemelyau Pittman. Their help greatly assisted the Board in deciding and managing the complexities this rulemaking entailed.

Fund are used in a manner that is protective of human health and the environment relative to present and future uses of the site and surrounding area. The TACO rules address the first two of these objectives; the remaining three are the focus of the Site Remediation Program at Part 740.

PROCEDURAL HISTORY

On September 16, 1996 the Agency filed a proposal to add the TACO rules as a new Part 742 to the Board's rules. The Board accepted this matter for hearing on September 19, 1996. On November 7, 1996, the Board sent this matter to First Notice without commenting on the merits of the proposal. Subsequently, on December 6, 1996, the proposal was published in the *Illinois Register* (20 Ill. Reg. 15429.)

Development of the Proposal. Section 58.11 of the Act, adopted as part of the Site Remediation Program legislation, created the Site Remediation Advisory Committee (SRAC) to advise the Agency in developing the mandated TACO and the Site Remediation Program regulatory proposals. The SRAC consists of one member from each of the following organizations: the Illinois State Chamber of Commerce, the Illinois Manufacturers Association, the Chemical Industry Council of Illinois, the Consulting Engineers Council of Illinois, the Illinois Bankers Association, the Community Bankers Association of Illinois, and the National Solid Waste Management Association. In addition, representatives from the Illinois Petroleum Council, the Illinois Petroleum Marketers Association, and the City of Chicago participated. The Agency met with the SRAC, or subgroups thereof, ten times between March 14, 1996 and August 30, 1996, to discuss both the TACO rules and the rules for the Part 740 Site Remediation Program. The TACO rules proposed by the Agency and adopted for First Notice represented the consensus reached by the SRAC and the Agency on the TACO rules. (See Exh. 1 at 11.) Two sets of hearings were held in this matter during the First Notice period. The first set of hearings, held on December 2 and 3, 1996, in Chicago, and on December 10, 1996 in Springfield, was reserved for the Agency's presentation of its proposal and questions for Agency witnesses. The second set of hearings, held on January 15 and 16, 1997 in Springfield, was for the purpose of addressing remaining questions for the Agency, allowing the presentation of testimony by other interested participants, and allowing questions directed to those testifying.

Subsequent to those hearings and after the close of the public comment period, on April 17, 1997, the Board sent the proposal to Second Notice, pursuant to the Administrative Procedure Act (5 ILCS 100/1-1 *et seq.* (1994)), for consideration by the Joint Committee on Administrative Rules. The Board opinion accompanying the second notice order explains in detail how the TACO methodology was developed and how the rules are to be applied in conjunction with other Board rules governing site remediation. At that time the Board also bifurcated this rulemaking and adopted a separate opinion and order creating a Docket B, wherein the Board proposed for First Notice new rules concerning a single issue. The Board found it necessary to do so because the Agency had requested that the Board adopt a "mixture" rule, *i.e.*, a rule which requires that an applicant consider the cumulative effect of similar-

acting contaminants at a site when developing the appropriate remediation objectives. Shortly thereafter, the Secretary of State informed the Board that it would not accept Docket B for First Notice publication because the rules proposed therein were amendments to Part 742 which was not yet adopted as final. Consequently, on May 1, 1997, the Board vacated its April 17, 1997 opinion and order, and replaced it with an opinion and order adopting the mixture rule under Docket B as proposed rules only.

On May 20, 1997, the Joint Committee on Administrative Rules voted no objection to the new Part 742, as proposed under Docket A. Today, the Board adopts Part 742 as final rules to become effective on July 1, 1997. The July 1, 1997 effective date coincides with the effective dates of the Site Remediation Program rules also finalized today as a new Part 740: In the Matter of: *Site Remediation Program and Groundwater Quality*, docketed as R97-11; and In the Matter of: *Leaking Underground Storage Tanks*, docketed as R97-10, adopted by the Board on March 6, 1997 amending the existing Part 732 which govern remediation of underground storage tanks. (Like the TACO rules, the Site Remediation Program was mandated by P.A. 89-431, while the leaking underground storage tank amendments were mandated by P.A. 89-457, effective May 22, 1996.)

Docket B: For the most part, the Agency's request for a mixture rule was developed in a series of filings subsequent to the public hearings in this matter, and with minimum justification in support of such rules. In its initial rulemaking proposal, the Agency had only requested a mixture rule under Tier 2 for noncarcinogenic chemicals. In its filings during the public comment period, but after the close of hearings, the Agency requested that the Board also adopt a mixture rule applicable to the development of groundwater remediation objectives under Tier 1 for both carcinogenic and noncarcinogenic chemicals, and further requested that the Tier 2 rule be applicable to carcinogenic chemicals in groundwater. The record before the Board at the time of Second Notice was insufficient for the Board to adopt the entire mixture rule ultimately requested by the Agency. However, the justification provided in support of expanding the rule's applicability did indicate that absent such a rule, remediation objectives determined using TACO may not be protective of human health at sites with multiple, similaracting chemicals. Therefore, the Board found it necessary to clearly examine the mixture rule proposed by the Agency to determine to what extent it is necessary to insure that the remediation objectives developed under TACO are protective of human health in all circumstances. Docket B was opened for that purpose. Docket B will proceed through regular rulemaking, albeit on an expedited schedule.

OVERVIEW OF THE TACO PROCESS

The TACO rules establish procedures for developing remediation objectives for soil and groundwater at remediation sites based on risks to human health, taking into account the existing pathways for human exposure and current and future use of the remediation site. The methodology consists of a three tiered approach for establishing remediation objectives. The tiers can operate fully independent of each other, and it is not necessary to perform a Tier 1 analysis before performing a Tier 2 or Tier 3 analysis, or to perform a Tier 2 analysis before

performing a Tier 3 analysis. Each successive tier allows the person conducting a remedial investigation pursuant to the Act (hereinafter referred to as the "applicant") to rely on more site-specific information, and requires a concomitant increase in the level of site-specific investigation and analysis under Part 742.

As a prerequisite to using the tiered approach to establish remediation objectives, the applicant must determine the contaminants of concern at the site. This is done by conducting a site investigation under the applicable remediation program; such investigation is not part of the TACO process. Again, the programs with which TACO is to be used include the Underground Storage Tank program at Part 732, the Site Remediation Program proposed at Part 740, and the RCRA Part B Permits and Closure Plans at Parts 724 and 725. As mentioned at the outset, these programs govern the activities at the site which address the contamination, including the scope of the site investigation and ultimately the no further remediation determination made by the Agency. (Hereinafter in the opinion, these programs are referred to as the "governing programs.") The specific requirements of the governing program control how TACO is applied to determine the applicable remediation objective. After identifying the contaminants of concern, the applicant can use the TACO process to establish remediation objectives. Each tier of the TACO process requires the applicant to consider up to four potential exposure routes for each contaminant of concern: 1) the inhalation exposure route; 2) the soil ingestion route; 3) the dermal contact exposure route¹; and 4) the groundwater ingestion route. The groundwater ingestion route is further subdivided into two components: 1) the migration to groundwater, or soil component, which must be investigated to establish a soil remediation objective; and 2) the direct ingestion of groundwater, or groundwater component, which must be investigated to establish a groundwater remediation objective. (Hereinafter each component of the groundwater ingestion route is referred to as the "soil component" or the "groundwater component"). Alternatively, as described in greater detail below, the applicant can: 1) demonstrate that a particular exposure route is not available for a contaminant of concern, and thereby exclude further consideration of that exposure route for that contaminant, or 2) rely on area background concentrations in establishing remediation objectives or to demonstrate that further remediation is not warranted.

A Tier 1 analysis requires the applicant to compare levels of contaminants of concern at the remediation site to pre-determined remediation objectives. The pre-determined remediation objectives are listed in the rules at Appendix B, Tables A through E. Separate remediation objectives are established for properties designated for residential use and for industrial/commercial use. The residential levels are the most stringent and are considered protective for all uses. The industrial/commercial levels are less stringent and must be accompanied by an institutional control, such as a deed restriction, in order to assure that the site is used only for industrial/commercial purposes. Additionally, if the site is to be

¹The dermal contact exposure route need only be considered if the applicant elects to use the Tier 2 Risk Based Corrective Action (RBCA) equations set forth in Appendix C, Table C, or a Tier 3 formal risk assessment, to establish remediation objectives.

remediated to industrial/commercial levels, the applicant must assure that the remediation levels established for construction workers are also achieved. If any contaminants of concern at a remediation site are found to exceed the applicable pre-determined levels, the applicant is required to remediate the contamination until the remediation objectives are achieved, or alternatively, to develop site-specific remediation objectives using a Tier 2 or Tier 3 analysis. Under Tier 1, if multiple noncarcinogenic chemicals with similar-acting properties are present in the groundwater, their cumulative effect must be evaluated as part of the development of remediation objectives. This is the Tier 1 component of the mixture rule adopted pursuant to the Agency's public comments during First Notice, and currently under further consideration under Docket B.

A Tier 2 analysis uses equations set forth in the rules to develop alternative remediation objectives for contaminants of concern using site-specific information. The equations used to develop site-specific remediation objectives are from the United States Environmental Protection Agency's (USEPA) Soil Screening Levels Guidance (SSL) and the American Society of Testing and Material's (ASTM) Risk Based Corrective Action (RBCA). The equations are set forth in the proposed rules at Appendix C, Tables A and C, respectively. If any contaminants of concern are found to exceed the remediation objectives developed using the Tier 2 equations, the applicant is required to remediate the contamination until the objectives are achieved or to develop alternative objectives using a Tier 3 analysis. The mixture rule for noncarcinogens is also applicable under Tier 2. Unlike a Tier 1 analysis, however, it is applicable when developing both soil and groundwater remediation objectives. This component of the Tier 2 mixture rule, as well as a mixture rule for carcinogens in groundwater, are bother under further consideration in Docket B.

A Tier 3 analysis allows the applicant to develop remediation objectives using alternative parameters not found in Tier 1 or Tier 2. It allows the applicant great flexibility in developing remediation objectives appropriate for a particular site based upon site-specific information rather than relying on general categories of information. The options available under Tier 3 include: use of modified parameters in the Tier 2 equations; use of alternative models; conducting a site-specific risk assessment; assessment of impractical remediation; and variation of the target risk level. If any contaminants of concern are found to exceed the remediation objectives developed using the Tier 3 analysis, the applicant is required to remediate the contamination until the objectives are achieved. At this time, the mixture rule is not specifically applicable to a Tier 3 analysis. However, a mixture rule for carcinogens and noncarcinogens is under consideration for soil and groundwater remediation objectives in Docket B.

Outside of the individual tiers of analysis, there are two alternative means for addressing the presence of contamination: exclusion of pathways and reliance on area background. The first option, exclusion of pathways, is based on the premise that an exposure pathway must exist for contamination to present a threat to human health. If it can be shown that a pathway does not exist for any contaminants of concern, the applicant need not address that exposure pathway for those contaminants. The methods for evaluating and excluding

exposure routes are set forth at Subpart C. The second option, reliance on area background, is based on Section 58.5(b)(1) of the Act, which provides that applicants shall not be required to remediate contaminants of concern to levels that are less than area background levels. If it can be shown that a contaminant of concern is present at levels that do not exceed area background levels for the site, the applicant need not further address that contaminant. Under appropriate circumstances, the applicant can also use background levels as remediation objectives. The methods for determining area background concentrations are set forth in Subpart D.

The applicant can use any combination of tiers if multiple contaminants of concern are present at a site. Remediation objectives established under any tier are considered equally health protective for a particular land use. Upon completion of remedial activities which achieve the established remediation objectives, the applicant is entitled to a no further remediation determination in accordance with the terms of the governing program. The TACO rules do not provide for the no further remediation determination; they provide only the process for determining site-specific remediation objectives based upon risk. The no further remediation determination is made at the conclusion of the process by the Agency pursuant to the governing program. For example, the Agency's no further remediation determination in the Site Remediation Program is effected through a No Further Remediation Letter. The same instrument is used in the Underground Storage Tank Program.

The following section contains a more detailed summary of the components of the rules. A detailed summary of the major issues raised concerning various components of the TACO rules, is set forth in the third section of the Second Notice opinion adopted on April 17, 1997. (See R97-12(A), Opinion and Order of April 17, 1997, beginning at page 33.)

SUMMARY OF THE SUBPARTS A THROUGH K

Subpart A: Introduction

This subpart contains sections concerning intent and purpose, applicability, overview and key elements of the tiered approach, and the requirements for site characterization. Section 742.100, entitled "Intent and Purpose," states that Part 742, the TACO process, contains the procedures for use in evaluating risks to human health posed by environmental conditions, and procedures for use in developing objectives for remediation which assure that risks are at acceptable levels. Furthermore, Section 742.100(b) states that the procedures are intended to provide adequate protection of human health and the environment based on risks to human health posed by environmental conditions while incorporating site-related information.

Section 742.105 sets forth the situations in which the rules are intended to apply. The applicant may use the Part 742 procedures to the extent allowed by state and federal law. The procedures must be used in accordance with the requirements of the program pursuant to which the remediation is being conducted. Section 742.105 specifically references the Underground Storage Tank program, the proposed Site Remediation Program, and the RCRA Part B Permits and Closure Plans. The use of Part 742 is subject to the limitation that it cannot be used where

there is an imminent and substantial endangerment to human health and the environment. Section 742.105 also makes clear that groundwater remediation objectives established pursuant to the TACO process can exceed the groundwater quality standards set forth at 35 Ill. Adm. Code Part 620. This exception is based upon a statutory provision; the record does not otherwise support such a rule. Section 58.5 of the Act authorizes the use of groundwater remediation objectives for contaminants of concern that are greater than the groundwater quality standards established by the Board at 35 Ill. Adm. Code 620 pursuant to the Illinois Groundwater Protection Act. (415 ILCS 55/1 *et seq.*) The Board has made clarifying changes to Section 742.105 to notify the applicant that remediation objectives greater than the Part 620 standards may be developed only under Tier 3. Under Docket B, the Board is considering whether such remediation objectives may also be determined under Tiers 1 and 2.

The Agency also proposed a rule to the effect that a no further remediation determination constitutes prima facie evidence that the contaminants of concern addressed at a site do not cause or tend to cause water pollution pursuant to Section 12(a) of the Act, or create a water pollution hazard pursuant to Section 12(d) of the Act. Such a statement would be particularly critical at sites remediated to groundwater objectives greater than the State's groundwater quality standards, because those groundwater quality standards were adopted as being the minimum levels protective of human health and the environment pursuant to the Illinois Groundwater Protection Act. (Id.) As explained above, Section 58.5 of the Act allows an applicant to propose, and the Agency to approve pursuant to Tier 3 of TACO, remediation objectives greater than the State's groundwater quality standards. Therefore, once such a remediation objective is achieved, the Agency's no further remediation determination in effect deems the levels of contamination remaining at the site as protective of human health. Yet, the programs used in conjunction with TACO govern the scope and extent of the legal protection provided by a No Further Remediation Letter or any other type of no further remediation determination made by the Agency. Therefore, the Board did not adopt under TACO the rule proposed by the Agency addressing the effect of a no further remediation determination.

Section 742.110 contains an overview of the tiered approach, which is similar to the summary of the rules set forth above. We will not repeat that discussion here. The applicant is well advised to consult the illustrations in the Appendices for assistance in understanding the TACO process generally, and any particular provisions. The Illustrations provide road maps and "decision trees" which further clarify the TACO process. Generally, Illustrations A and B of Appendix A provide decision trees for developing soil and groundwater remediation objectives, respectively. Illustration A of Appendix B provides such a road map for Tier 1, and Illustrations A and B of Appendix C provides the same for Tier 2. However, none of the illustrations include the effect of the mixture rule adopted today, or being considered under Docket B.

Section 742.115 addresses the "Key Elements of the Tiered Approach." It sets forth the exposure routes that must be evaluated, the factors that must be considered in determining the remediation objectives for contaminants of concern, and the potential land use classifications for the site. Section 742.115(a) sets forth the potential exposure routes that

must be addressed at a remediation site, specifically: inhalation, soil ingestion, groundwater ingestion, and dermal contact with soil. The groundwater ingestion route is further divided into two components: the soil component and the groundwater component. The dermal contact exposure route need only be addressed if the applicant develops remediation objectives using RBCA equations set forth in Appendix C, Table C, or through a formal risk assessment under Tier 3. For each contaminant of concern, the applicant must develop remediation objectives for each applicable exposure pathway or demonstrate that a pathway has been excluded from consideration.

Section 742.115(b) sets forth the factors that must be considered when identifying the contaminants of concern at the remediation site. These factors include: 1) the materials and wastes managed at the site; 2) the extent of the no further remediation determination which the applicant is seeking from the Agency under the governing program, *e.g.*, under the Site Remediation Program, a comprehensive or focused No Further Remediation Letter; and 3) the general requirements applicable under the governing program. In the Site Remediation Program or a Section 4(y) voluntary cleanup, the applicant determines the scope of the remediation and the contaminants of concern that will be addressed. In other programs, the scope of the remediation and contaminants of concern will be dictated by the governing program's requirements. At the conclusion of the process, the Agency will make a determination about whether further remediation is necessary under the governing program. If the Agency determines that no further remediation is necessary, the scope of the determination will extend only to the scope of the remediation performed.

Section 742.115(c) sets forth the possible land use classifications under the TACO process. The rules allow the proposed land use to be characterized as one of the following: residential, conservation, agricultural, or industrial/commercial. The land use classification determines the expected exposure scenario at the site, which is a principal factor in establishing health protective remediation objectives.

Tier 1 sets forth separate remediation objectives for residential and industrial/commercial uses. Similarly, Tier 2 has separate equations for developing remediation objectives for residential and industrial/commercial uses which reflect the different exposure rates expected for each land use. The remediation objectives for industrial/commercial property are premised upon a lower exposure rate, and therefore are less stringent than those established for residential property. Accordingly, an industrial/commercial designation under any tier requires an accompanying institutional control to assure that the land use is appropriately restricted to that property classification. Furthermore, because the rules do not reflect consideration of the appropriate exposure expected for a conservation or agricultural land use designation, these designations require a Tier 3 demonstration based on individual site use characteristics to assure appropriate protection of human health and the environment.

Section 742.120 sets forth the requirement that the applicant perform a site characterization prior to developing remediation objectives pursuant to TACO in order to

establish the extent and concentrations of contamination at the site. The site investigation must be conducted in accordance with the requirements of the governing program. The TACO rules therefore do not set forth a separate site investigation procedure.

Subpart B: General

Subpart B of the rules contains general sections including definitions, a severability clause, and incorporations by reference. Additionally, Subpart B sets forth procedures for determining the soil attenuation capacity, the soil saturation limit, and demonstrating compliance with remediation objectives. These procedures apply across the entire TACO process. Finally, Subpart B contains the general rule that submittals to the Agency and subsequent review and approval by the Agency are to be done in accordance with the governing program's rules.

Definitions. Section 742.200 sets forth the definitions of terms used in these proposed rules. Most of these are self-explanatory, however several warrant further discussion. The definition of the term "carcinogen" repeats the statutory language from Section 58.2 of the Act. This definition requires that contaminants that fall into any of the following categories be considered carcinogens: 1) Category A1 or A2 carcinogens, as defined by the American Conference of Governmental Industrial Hygienists; 2) Category 1 or 2A/2B carcinogens, as defined by the World Health Organization's International Agency for Research on Cancer; 3) a "Human Carcinogen" or "Anticipated Human Carcinogen," as defined by the United States Department of Health and Human Service National Toxicological Program; or 4) a Category A or B1/B2 carcinogen as defined by the United States Environmental Protection Agency in its Integrated Risk Information System (IRIS), or a final rule issued in a Federal Register notice by the USEPA. Because the USEPA Soil Screening Level Guidance, which the Agency relied upon in developing the Tier 1 Tables for soil remediation objectives, includes Category C carcinogens within its definition of "carcinogens," the Agency recalculated the soil remediation objectives for those contaminants classified as Category C carcinogens by USEPA. The Board agrees that this properly reflects the statutory intent.

At the Board's request, the Illinois Department of Transportation (IDOT) introduced into the record the definitions of the terms "highway," "highway authority," and "right of way" from the Illinois Highway Code. (See Dec. 10, 1996 Transcript at 114 - 115.) The Agency proposed that these definitions be included in the proposed rules in its Errata Sheet No. 2. The Board believes that including these definitions in the rules clarifies these terms and ensures consistency in their application and, therefore, adopts these definitions.

The definition of "residential property" proposed by the Agency paraphrased the statutory language for Section 58.2 of the Act. The Agency's proposed definition reads: "Residential Property" means any real property that is used for habitation by individuals or properties where children have the opportunity for exposure to contaminants through ingestion or inhalation at educational facilities, health care facilities, child care facilities or playgrounds.

To more closely reflect the statutory intent, the Board adopts a slightly modified definition for Part 742, as well as in Part 740 in the R97-11 rulemaking. The definition as adopted reads:

"Residential Property" MEANS ANY REAL PROPERTY THAT IS USED FOR HABITATION BY INDIVIDUALS, or where children have the opportunity for exposure to contaminants through soil ingestion or inhalation at educational facilities, health care facilities, child care facilities, or outdoor recreational areas.

Soil Attenuation Capacity and Saturation Limit. Section 742.215 requires that the concentrations of organic contaminants remaining in the soil not exceed the attenuation capacity of the soil and sets forth the method for determining soil attenuation capacity. The requirement that the soil attenuation capacity not be exceeded is intended to insure the integrity of the soil remediation objectives established under the tiered approach, since the models which are used to derive the soil remediation objectives do not account for the existence of free product. Contaminant transport models generally assume equilibrium between contaminants that adhere to soil particles and contaminants that dissolve in water in the soil pores. This assumption is violated if the soil attenuation capacity is exceeded; then the models cannot accurately predict the behavior and movement of contaminants. (See Exh. 4 at 3-5.) Furthermore, John Sherrill of the Agency testified that the requirement that the soil attenuation capacity not be exceeded will achieve three objectives. First, it will ensure that there will be no migration of mobile free products. Second, it will protect against potentially unacceptable health risks from accidental exposure to contamination left in place which might occur if an engineered barrier or institutional control is breached. Finally, it will provide a ceiling on the level of exposure from high contaminant concentrations from multiple organic contaminants. (Dec. 2, 1996 Transcript at 151-152.)

Similarly, because the models which are used to derive the soil remediation objectives do not account for the existence of free product, Section 742.220 provides two circumstances under which remediation objectives cannot exceed the soil saturation limit (C_{sat}). The soil saturation limit is defined in Section 742.200 as "the contaminant concentration at which soil pore air and pore water are saturated with the chemical and the adsorptive limits of the soil particles have been reached." Pursuant to Section 742.220, the applicant must ensure that the soil saturation limit is not exceeded when establishing a Tier 2 or Tier 3 remediation objective for the inhalation exposure route for an organic contaminant with a melting point below 30° C, or when establishing a Tier 2 or Tier 3 remediation objective for the soil component of the groundwater ingestion exposure route for any organic contaminant.

Section 742.220 establishes three methods for determining the soil saturation limit. These methods are: 1) use of the chemical-specific default values set forth in Appendix A, Table A; 2) use of a value derived from Equation S29 in Appendix C, Table A; or 3) use of a value derived from another method approved by the Agency.

<u>Compliance with Remediation Objectives</u>. Section 742.225 sets forth the method for demonstrating compliance with remediation objectives. For groundwater remediation

objectives, compliance with remediation objectives is demonstrated by comparing discrete samples to the applicable groundwater remediation objective. The location of groundwater sampling points is determined in accordance with the requirements of the governing program pursuant to which remediation is being conducted.

Similarly, compliance with soil remediation objectives can be demonstrated by comparing discrete samples of contaminant concentrations to the applicable soil remediation objective, unless the applicant elects to composite or average soil samples in accordance with subsections (c) and (d) of this section, as explained below. Again, the number of locations is determined by the governing program.

Subsection (c) of Section 742.225 sets forth the requirements and limitations applicable to compositing or averaging soil samples for the soil component of the groundwater ingestion exposure route. For contaminants other than volatile organic compounds (VOCs), discrete samples from the same boring may be composited or averaged. For VOCs, discrete samples from the same boring may be averaged but compositing of samples is not allowed. This is because compositing would tend to allow VOCs to volatilize and escape and the sampling would thus underestimate the presence of volatile contaminants of concern in the soil. A minimum of two sampling locations for every 0.5 acres of contaminated area is required, with discrete samples at each location taken at every two feet of depth, beginning six inches below the ground surface, and continuing through the zone of contamination. Samples may not be taken from below the water table.

Subsection (d) of Section 742.225 sets forth the requirements and limitations applicable to compositing or averaging soil samples for the inhalation or ingestion exposure routes. The compositing and averaging requirements will be established on a site-specific basis, based upon a sampling protocol approved by the Agency.

Pursuant to Section 742.225(e), for the purposes of calculating averages under Section 742.225, if no more than 50 percent of the samples are reported as non-detect or below detection limits, such results must be included in the sampling results as one-half of the reported detection limit for the contaminant. If more than 50 percent are reported as non-detect, the applicant must obtain Agency approval for an alternate procedure which is statistically valid for determining the average.

Section 742.230 returns to the more general format of Subpart B. An omnibus provision, Section 742.230 addresses Agency review and approval of submittals. This section makes clear that the applicant must submit documents and requests in accordance with the governing program under which the remediation is being addressed and the Agency will review and approve the same in accordance with the governing program.

Subpart C: Exposure Route Evaluations

Subpart C sets forth the requirements and methodologies for determining and evaluating the following exposure routes: inhalation, soil ingestion, and groundwater ingestion. The rules allow the applicant to exclude from consideration contaminants of concern for one or more exposure routes if the applicant demonstrates that the identified exposure route is not available for that contaminant. The principle underlying the pathway exclusion is different from that underlying the development of numeric remediation objectives. It is premised on the concept that an exposure route must exist which enables a contaminant to reach a receptor for the contaminant to present a threat to human health. Thus, Agency witness Mr. Gary King testified that pathway exclusion is based on effective source control, coupled with site conditions and an appropriate institutional control that effectively prohibits human exposure through a given pathway. (Exh. 2 at 4.) The rules set forth five general criteria, as well as exposure route-specific criteria, which must be satisfied to exclude an exposure route for a particular contaminant of concern.

General Criteria for Exclusion of Pathways. There are five general criteria which must be satisfied before any exposure route may be excluded from consideration. These criteria are intended to insure that the contamination left in place when the pathway is excluded will not present a threat to human health. The first two criteria, set forth in Sections 742.305(a) and (b), require that the soil attenuation capacity and the soil saturation limit capacity not be exceeded, as set forth in Section 742.215 and 742.220, respectively. These criteria are intended to insure that there is no free product present and to insure that the behavior of the contaminants can be accurately modeled.

Criteria three through five, set forth in Sections 742.305(c) through (e), require the applicant to insure that the contaminated soil which remains in place will not exhibit the hazardous characteristics of reactivity, corrosivity, or toxicity. Section 742.305(c) requires that any soil that contains contaminants of concern cannot exhibit any of the characteristics for reactivity for hazardous waste, as determined under 35 Ill. Adm. Code 721.123. Section 742.305(d) requires that any soil that contains contaminants of concern cannot exhibit a pH less than or equal to 2.0, or greater than or equal to 12.5. Finally, Section 742.305(e) requires that any soil that contains one or more of the inorganic chemicals arsenic, barium, cadmium, chromium, lead, mercury, selenium, silver, or the salts of any of these chemicals cannot exhibit characteristics of toxicity. The toxicity determination is made pursuant to the methods set forth at 35 Ill. Adm. Code 721.124.

Specific Criteria for Exclusion of Pathways. Sections 742.310, 742.315 and 742.320 set forth the specific criteria which must be satisfied to exclude from consideration each particular pathway, *i.e.*, inhalation, soil ingestion, and groundwater ingestion respectively. These criteria must be satisfied in order to exclude the applicable exposure route, in addition to the five general criteria set forth in Section 742.305.

Section 742.310 sets forth additional criteria which must be satisfied in order to exclude the inhalation exposure route for contaminants of concern. In order to exclude this exposure route, the concentration of any contaminant of concern within ten feet of the land surface or

any man-made pathway cannot exceed the Tier 1 remediation objective for the inhalation exposure route. Alternatively, the applicant can install an engineered barrier, as set forth in Subpart K, which is approved by the Agency. The applicant must also obtain an institutional control, in accordance with the requirements of Subpart J, which ensures compliance with these requirements and ensures the safety of construction workers.

Section 742.315 sets forth additional criteria which must be satisfied in order to exclude the soil ingestion exposure route for contaminants of concern. To exclude this pathway, the applicant must demonstrate that the concentration of any contaminant of concern within three feet of the land surface does not exceed the applicable Tier 1 remediation objective or that an engineered barrier has been installed, in accordance with the requirements of Subpart K and approved by the Agency. Furthermore, the applicant must obtain an institutional control which ensures that these requirements are met and ensures the safety of construction workers.

Section 742.320 sets forth the additional criteria which must be satisfied in order to exclude the groundwater ingestion exposure route from consideration. These criteria include location and groundwater quality demonstrations, as well as a requirement that an institutional control, *i.e.* an ordinance adopted by the local government, be in place. Taken together, these criteria are intended to ensure that potable drinking water supplies will not be impacted by contamination left in place.

Specifically, the applicant must demonstrate that corrective action measures have been completed to remove any free product. The applicant must also demonstrate that the source of the release is not located within the minimum or designated maximum setback zone or within a regulated recharge area of a potable water supply well. The applicant must also demonstrate that the concentration of any contaminant of concern in the groundwater within the minimum or designated maximum setback zone of an existing water supply well meets the applicable Tier 1 groundwater remediation objective. Finally, the applicant must demonstrate that the concentration of any contaminant of concern in groundwater which discharges to a surface water will meet the applicable surface water quality standards under 35 Ill. Adm. Code 302. These last two demonstrations must be made using Equation R26 in Appendix C, Table C. In order to exclude the direct ingestion of groundwater pathway, in addition to satisfying the location and groundwater quality demonstrations, the applicant must demonstrate, in accordance with Subpart J: Institutional Controls, that the unit of local government has adopted an ordinance that effectively prohibits the installation or use of groundwater as a potable supply of water. Such an ordinance must be in effect for any area within 2500 feet of the source of the release. Additionally, the unit of local government must enter into a Memorandum of Understanding (MOU) with the Agency if the local ordinance used as an institutional control does not prohibit the local government from installing and using a potable water supply well. The MOU must commit the local government to: 1) keep a registry of sites within its boundaries that have received no further remediation determinations; 2) consider whether groundwater contamination from those sites may be present at potential public well sites; and 3) take appropriate protective measures if wells are sited near such locations. (PC 15 at 5-6; Errata Sheet No. 2.)

Subpart D: Determining Area Background

This subpart sets forth the procedures for determining area background concentrations for contaminants of concern. As set forth in Section 58.5(b) of the Act, applicants shall not be required to remediate contaminants of concern to levels that are less than area background levels, subject to two statutory exceptions which have been included in the rules at Section 742.415. First, if the contaminant concentration is equal to or less than the area background level, yet it exceeds the Tier 1 residential level, the property cannot be converted to residential use unless that remediation level or an alternative developed under Tier 2 or Tier 3 is achieved. (Section 58.5(b)(2) of the Act.) Second, if the Agency determines in writing that the area background level poses an acute threat to human health or the environment in consideration of the post-remedial land use, appropriate risk-based remediation levels must be developed. (Section 58.5(b)(3) of the Act.) If neither of these exceptions applies, and the applicant can demonstrate that contaminant concentrations are at area background levels, no further remediation is required. Another use of area background levels is for the applicant to demonstrate that area background levels should be used as the remediation objectives for contaminants of concern. This alternative is limited to industrial/commercial properties only, and accordingly requires the use of an institutional control.

Determination of Area Background for Soils. Section 742.405 sets forth the method for determining area background for soils. Subsection (a) sets forth the sampling requirements. Section 742.405(b) sets forth the two options available to the applicant for determining the area background level for inorganics. The first option is referred to as the statewide area background approach. This approach relies upon data previously compiled by the Agency concerning area background concentrations throughout the State, which is set forth in Appendix A, Table G. Under the statewide area background approach, the applicant must set the upper limit of the area background concentration for the site at the value of the concentrations of inorganic chemicals in background soils listed in Appendix A, Table G. The applicant's second option is to use another method which is statistically valid for the characteristics of the data set and which has been approved by the Agency.

<u>Determination of Area Background for Groundwater</u>. Section 742.410 sets forth the method for determining area background concentrations for groundwater. Subsection (a) sets forth the sampling requirements and is intended to ensure that the sampling points are of sufficient quantity and appropriately located so as to be representative of actual background concentrations. Section 742.410(b) sets forth the two options available to the applicant for determining background levels for groundwater. The first option is referred to as the "Prescriptive Approach"; the second option is the use of another statistically valid approach which is appropriate for the data set and approved by the Agency.

Under the Prescriptive Approach, the upper limit of the area background concentration for the site is set at the Upper Tolerance Limit (UTL) for sample sets of ten samples or more, or at the maximum value of the sample set for sets of less than ten samples. The Prescriptive

Approach establishes the method for determining the UTL of a normally distributed sample. If the sample set contains less than fifty (50) samples, the applicant must use the Shapiro-Wilke Test of Normality to determine whether the sample set is normally distributed. The Prescriptive Approach can only be used if the samples are determined to be normally distributed.

The Prescriptive Approach cannot be used if more than 15 percent of the groundwater sampling results for any chemical are less than the appropriate detection limit for that chemical. If 15 percent or less are less than the appropriate detection limit, a concentration equal to one-half the detection limit must be used for that chemical in the calculations. Additionally, the Prescriptive Approach cannot be used for determining area background for pH. For these exceptions and in any case, Section 742.410(b) concludes with the provision that another statistically valid approach may be used on a site-specific basis if approved by the Agency.

Pursuant to Section 742.415, area background concentrations can be used in two ways. First, an area background concentration can be used to support a request to exclude a chemical as a contaminant of concern from further remediation due to its presence as a result of background conditions. Second, an area background concentration can be used as the remediation objective for a contaminant of concern. For either of these to occur the applicant must submit the request to the Agency. Again, however, pursuant to Section 58.5(b)(3) of the Act, area background cannot be used in either manner if the Agency determines, in writing, that the background level poses an acute threat to human health or the environment taking into consideration the post-remedial land use of the site.

Subpart E: Tier 1 Evaluation

A Tier 1 evaluation compares the concentrations of contaminants of concern to established baseline remediation objectives which are set forth in Appendix B, Tables A through E. The Tier 1 objectives are numerical chemical concentrations that represent a level of contamination at or below which there are no human health concerns for the designated land use. The Tier 1 objectives for individual chemical contaminants do not exceed an excess cancer risk of 1 in 1,000,000 for carcinogens (also referred to as 1 x 10⁻⁶), or a hazard quotient² of 1 for noncarcinogens. The pre-established remediation objectives under Tier 1 are based upon the SSL and the screening levels therein are designed to insure that contaminants of concern individually will not present a greater risk. However, in some instances where multiple contaminants are present at a site, the cumulative effect of similar-acting chemicals

²"Hazard Quotient" is defined as the ratio of a single substance exposure level over a specified time period to a reference dose for that substance derived from a similar exposure period. The reference dose, which is derived for noncarcinogens as an acceptable daily chemical exposure, is that dose at which no harmful consequences occur. A hazard quotient greater than 1 signifies a potential adverse effect, since a value greater than one occurs when a chemical exposure is measured to be greater than the reference dose.

may cause the target risk of 1×10^{-6} or the hazard quotient of 1 to be exceeded. To correct this, the rules adopted today include a mixture rule which provides that remediation objectives developed under Tier 1 for the groundwater ingestion exposure route must take into account the cumulative effect of noncarcinogens affecting the same target organs at a site. This rule, as well as a mixture rule for carcinogens in groundwater, are the subject of further consideration in Docket B.

In order to allow consideration of the proposed land use for the site, different objectives are set forth for different receptor populations: residential, industrial/commercial, and construction workers. Where the remediation objectives are based on an industrial/commercial property use, institutional controls must be adopted in accordance with Subpart J to ensure that the land use is appropriately restricted. The applicant need not further evaluate an exposure route if all contaminants of concern are below Tier 1 values for that exposure route, with the one exception for groundwater remediation objectives.

The Tier 1 remediation objectives are set forth in Appendix B, Tables A through E. These tables set forth remediation objectives for 117 chemicals. The tables are generally divided into two groups: those applicable to soil remediation objectives, and those applicable to groundwater remediation objectives. The groundwater component and the soil component of the groundwater ingestion route are further divided into objectives for Class I or Class II groundwater.

<u>Tier 1 Soil Remediation Objectives</u>. Under Tier 1, the applicant must consider two different direct exposure routes for soil when establishing remediation objectives pursuant to the TACO approach: the inhalation exposure route and the ingestion exposure route. Additionally, the applicant must consider the soil component of the groundwater ingestion route. Because these objectives are considered sufficiently protective, the applicant need not examine the dermal contact exposure route under Tier 1. The Tier 1 soil remediation objectives are set forth in Appendix B, Tables A, B, C, and D. The mixture rule adopted today for similar-acting chemicals is not applicable to these remediation objectives.

Appendix B, Table A sets forth the soil remediation objectives based upon residential property use, for the soil ingestion exposure route, the inhalation exposure route, and the soil component of the groundwater ingestion exposure route. Where appropriate, Table A also sets forth the Acceptable Detection Limit (ADL).³ Because the Tier 1 residential levels are based upon protection in a residential exposure scenario, they are considered sufficiently protective that it is not necessary to establish separate remediation objectives for construction workers.

³ADL is defined at Section 742.200 to mean the detectable concentration of a substance which is equal to the lowest appropriate Practical Quantitation Limit (PDL). PDL is defined as the lowest concentration that can be reliably measured within specified limits of precision and accuracy for a specific laboratory analytical method during routine laboratory operating conditions. See Section 742.200 for these definitions in their entirety.

Appendix B, Table B sets forth the Tier 1 soil remediation objectives based upon industrial/commercial property use. As for the residential remediation objectives in Table A, separate remediation objectives are established for the soil ingestion exposure route, the inhalation exposure route, and the soil component of the groundwater ingestion exposure route. For the soil ingestion exposure route and the inhalation exposure route, separate remediation objectives are established for two receptor populations: the industrial/commercial population and the construction worker population. For the soil component of the groundwater ingestion exposure route, separate remediation objectives are established for Class I and Class II groundwaters.

The Tier 1 objectives for the soil ingestion and inhalation pathways were derived using the SSL with modifications as necessary to comply with Illinois law. The SSL was developed by USEPA for use in the Superfund program as a mechanism for screening out sites which do not require further study or action. The screening levels in the SSL are soil concentrations at or below which there is no concern in the Superfund program that some type of further action is required. They were developed based on a conceptual site model of a one-half acre site, with contamination extending to the water table, upon which a future residence with a private well would be built. (December 2, 1996 Transcript at pages 52-54; Exh. 5 at 11.)

Again, the screening levels in the SSL are designed to insure that the contaminants of concern individually will not present a greater than 1 in a million excess cancer risk for carcinogens or have a hazard quotient greater than 1. Since the SSL is based on an anticipated residential use, the Tier 1 remediation objectives for the industrial/commercial and construction workers had to be calculated from the SSL equations using the different exposure assumptions appropriate for these populations.

The Tier 1 objectives for the soil component of the groundwater ingestion route were derived from two different sources. For organic chemical contaminants, the Tier 1 objectives were derived using SSL equations with separate objectives established for Class I and Class II groundwaters. For inorganics, the proposed Tier 1 objectives establish two alternative approaches to setting soil objectives for the soil component of the groundwater ingestion route. The first alternative is based on the Toxicity Characteristic Leaching Procedure (TCLP) or the Synthetic Precipitation Leaching Procedure (SPLP) test. The second alternative is to allow pH-specific remediation objectives.

Section 742.510(a)(4) allows the use of the SPLP or the TCLP to evaluate the soil component of the groundwater ingestion exposure route. The TCLP method is used in the Underground Storage Tank program; the SPLP method is new under the TACO rules. The latter has been adopted by the USEPA for determining compliance with remediation objectives. It is designed to mimic the pH of rainwater that percolates through a contaminated site. (January 15, 1997 Transcript and January 16, 1997 Transcript at pages 237-250; Exh. 18 at 7.) Under either method, the remediation objective is the same as the Part 620 groundwater quality standard for the chemical of concern for the applicable groundwater classification. The applicant must perform a TCLP or SPLP analysis on a soil sample from the site and compare

the concentration of the inorganic chemical of concern in the TCLP or the SPLP extract to the applicable groundwater standard. Additionally, an applicant still may evaluate the soil component on the basis of the total amount of contaminant in the soil sample result. This alternative is provided at subsection (a)(5) of Section 742.510.

The second alternative for establishing soil objectives for the soil component of the groundwater ingestion appears at Section 742.510(a)(5) and allows the applicant to establish pH-specific remediation objectives appropriate for the conditions at the site. (Exh. 5 at 20.) In addition to inorganics, this alternative may be used to establish remediation objectives for certain ionizable organics. The pH-specific objectives for Class I and Class II groundwaters are set forth in Appendix B, Tables C and D, respectively. These alternative remediation objectives allow the applicant to elect to evaluate the soil component of the groundwater ingestion exposure route based on the total amount of contaminant in a soil sample result, rather than the TCLP or SPLP analysis. In order to use this alternative approach, the applicant must determine the soil pH at the site and then select the appropriate soil remediation objectives based on Class I and Class II groundwaters. This method cannot be used if the soil pH is less than 4.5 or greater than 8.0.

Separate soil remediation objectives based on pH for identified ionizable organics or inorganics are adopted because the solubility of metals in water is highly dependent on pH of the solution. (See Section 742.505(a)(3)(C).) Generally, at lower pH, all metals are more soluble than at higher pH. To account for this phenomenon, the proposed standards have tables (Appendix B, Tables C and D) that list inorganic and ionizable organic compounds for pH values ranging from 4.5 to 8.0 in nine intervals of 0.25 increments. There are 15 metals and eight organic compounds listed in each table. There are separate tables for Class I and Class II groundwater.

Finally, pursuant to Section 742.510(a)(6), the applicant must review the soil remediation objectives determined for each remaining exposure routes, and select the most stringent of those remediation objectives, and then compare that one to the soil concentrations measured at the site. When using Appendix B, Table B for evaluating industrial/commercial properties, the remediation objectives for the ingestion and inhalation exposure routes shall be the more stringent of the industrial/commercial populations and the construction worker populations. If the soil remediation objective for a chemical is less than the ADL, the ADL shall serve as the remediation objective. Based upon this analysis, the applicant will be able to identify the applicable soil remediation objective under a Tier 1 evaluation.

<u>Tier 1 Groundwater Remediation Objectives</u>. Identifying the applicable groundwater remediation objective is more straightforward. Appendix B, Table E contains the groundwater remediation objectives for the groundwater component of the groundwater ingestion exposure route. The table contains separate values for Class I and Class II groundwaters and therefore the applicant must determine the Part 620 classification for groundwater at the site. The applicant must then compare the concentrations of groundwater contaminants at the site to the applicable Tier 1 groundwater remediation objectives set forth in Table E. Because this

exposure route is based on direct ingestion of groundwater, an exposure route which is not impacted by the land use at the site, no distinction is made between residential and industrial/commercial use.

On an interim basis, the Board also adopts a requirement that the effect of similar-acting chemicals be evaluated when determining Tier 1 groundwater remediation objectives for noncarcinogenic chemicals. When more than one contaminant of concern which affects the same target organ is detected at the site, the mixture rule is applicable. That rule, which is essentially the same required under Tier 2, is found at Section 742.505(b)(3). The groundwater remediation objectives listed at Appendix B, Table E must be corrected to take into account the cumulative effect of mixtures of noncarcinogenic chemicals. There are two optional procedures for doing so. The first option at Section 742.505(b)(3) requires the calculation of weighted average using the formula set out therein. The remediation objectives are met if the weighted average is less than or equal to 1. If the weighted average is greater than 1, more remediation must be carried out until the weighted average is less than or equal to 1.

Alternatively, Section 742.505(b)(3) provides that the individual remediation objective be divided by the number of chemicals detected in the groundwater that affect specific target organs or organ system.

Finally, for any contaminants of concern not listed in Appendix B, Tables A through E, the applicant may request site-specific remediation objectives from the Agency, or propose site-specific objectives in accordance with 35 Ill. Adm. Code 620, Tier 3 at Subpart I of TACO, or both.

Subpart F: Tier 2 General Evaluation

Under Tier 2, the applicant can develop soil and groundwater remediation objectives applying site-specific information to pre-established modeling equations. The Tier 2 equations are set forth in Appendix C, Tables A and C. These equations are from the SSL and the RBCA approaches. (See Appendix C, Tables A and C, respectively for the equations to be used. The values to be used in the calculations, and the appropriate units are found at Appendix C, Tables B and D.) Table B contains the values for use in the SSL equations, and Table D contains the values for the RBCA equations. These tables also contain the acceptable exposure factors for the residential, industrial/commercial and construction worker populations when the present and post-remediation land uses are evaluated. As in Tier 1, the remediation objectives in Tier 2 cannot exceed an excess cancer risk of 1 in 1,000,000 for carcinogens, or a hazard quotient of 1 for noncarcinogens. Additionally, as in Tier 1, there is a mixture rule requiring that the cumulative effect of similar-acting noncarcinogenic chemicals be evaluated in developing remediation objectives. However, unlike Tier 1, this rule is applicable to soil as well as groundwater remediation objectives.

The rules generally applicable to a Tier 2 evaluation are set forth at Section 742.600. Similar to a Tier 1 analysis, the soil saturation and soil attenuation capacity restrictions found at Subpart B: Sections 742.215 and 742.220 apply. In other words, free product must be removed. (See subsections (d)(1) and (3) of Section 742.600.) Section 742.600 also instructs the applicant about how to choose the correct remediation objective if there is more than one exposure route requiring a remediation objective. This selection process is described at Section 742.600(e), (f), and (g), and presumes that the applicant has chosen to forgo the Tier 1 fixed numerical remediation objectives.

At the December 3, 1996 hearing, John Sherrill, an Agency witness, gave examples demonstrating when to use a Tier 1 or 2 remediation objective. For the purposes of illustration, the remediation objectives for benzene are used. The groundwater is Class I, none of the exposure routes are excluded and the numbers from Appendix B, Table A are used. The remediation objective for benzene for the ingestion route is 22 mg/kg, for the inhalation route is 0.8 mg/kg, and the migration to groundwater route is 0.03 mg/kg. The migration to groundwater remediation objective applies as the Tier 1 soil remediation objective because it is the most stringent out of the three values. If the calculated Tier 2 soil remediation objective for an exposure route is more stringent than the Tier 1 remediation objective for the same exposure route, then the Tier 1 remediation objective applies. In the hypothetical, within Tier 2, the applicant calculates a soil remediation objective of 0.02 mg/kg. The remediation objective would then be 0.03 mg/kg because it is less stringent than the calculated Tier 2 soil remediation objective.

If the calculated Tier 2 soil remediation objective for an exposure route is more stringent than one or more of the Tier 1 soil remediation objective(s) for a different exposure route, then the calculated Tier 2 soil remediation objective applies and the Tier 2 remediation objective for other exposure routes do not need to be calculated. For example, within Tier 2, the applicant calculates a migration to groundwater remediation objective of 0.1 mg/kg. The remediation objective would then be 0.1 because it is more stringent than the Tier 1 ingestion and inhalation remediation objectives (22 mg/kg and 0.8 mg/kg respectively).

If the calculated Tier 2 soil remediation objective is less stringent than one or more of the Tier 1 soil remediation objectives for the remaining exposure routes, then the other Tier 2 remediation objectives are calculated and the most stringent calculated Tier 2 value applies. Within Tier 2, the applicant calculates a migration to groundwater remediation objective of 1.2 mg/kg. This is less stringent than the inhalation soil remediation objective in Tier 1. So the applicant then calculates the Tier 2 ingestion and inhalation remediation objectives. The applicant calculates an ingestion remediation objective of 30 mg/kg and an inhalation remediation objective of 11 mg/kg. Since the Tier 2 migration to groundwater remediation objective is the most stringent (1.2 is less than 30 and 11), 1.2 mg/kg is the remediation objective.

As in Tier 1, the proposed land use for the site is considered in establishing Tier 2 soil remediation objectives. In a Tier 2 evaluation, the proposed land use for the site will

determine the appropriate exposure factors contained in the applicable equation. The appropriate exposure factors for residential, industrial/commercial, and construction worker populations are set forth in Appendix C, Tables B and D. The established exposure factors can only be varied in a Tier 3 analysis. If a Tier 2 evaluation is based on an industrial/commercial property use, the construction worker scenario must also be evaluated. Additionally, the applicant must obtain an institutional control in accordance with the requirements of Subpart J.

Finally, the mixture rule originally proposed for Tier 2 is adopted at Section 742.720 which addresses soil remediation objectives, and at Section 742.805 which addresses groundwater remediation objectives. These procedures are the same as those adopted under Tier 1 for noncarginogenic chemicals detected in groundwater. The distinction is that the mixture rule is applicable to soil remediation objectives, as well as groundwater remediation objectives. Again, these mixture rules are subject to further consideration under Docket B.

Subpart G: Tier 2 Soil Evaluation

Tier 2 provides the applicant with two options for establishing soil remediation objectives: reliance on the SSL equations or on the RBCA equations. Because the RBCA equations combine the soil ingestion, inhalation of vapors and particulates, and dermal contact exposure routes, while the SSL equations treat the soil ingestion, inhalation of volatiles, and inhalation of fugitive dust exposure routes separately, the applicant must choose only one of these approaches, and the two approaches cannot be combined. However, both methods treat the soil component of the groundwater exposure route separately, so the applicant can choose to use either method to calculate the remediation objectives for this exposure route, no matter which approach was used to establish the other soil objectives.

<u>SSL Equations</u>. The SSL equations are set forth in Appendix C, Table A. The parameters for these equations are set forth in Appendix C, Table B. The equations are divided into separate categories by exposure route: ingestion, inhalation of volatiles, inhalation of fugitive dust, and migration to groundwater.

Within each exposure route's set of equations, there are separate sets of equations for noncarcinogens and carcinogens. The equations for carcinogens reflect an expected excess cancer risk of 1 in 1,000,000, while the equations for noncarcinogens reflect a hazard quotient of 1. Within these categories, separate equations are set forth for residential, industrial/commercial, and construction worker populations. The different equations for each type of land use reflects the expected differences in the exposure factor, exposure duration, averaging time, and ingestion rate. Default values and parameters for these equations are listed in Appendix C, Table B.

RBCA Equations. Appendix C, Table C contains the RBCA equations used in Tier 2. The RBCA equations for establishing soil remediation objectives are separated into three categories. The first category examines the combined exposures of soil ingestion, inhalation of vapors and particulates, or dermal contact with soil. The second category examines the

ambient vapor inhalation (outdoor) route from subsurface soils. The third category is for the migration to groundwater pathway. Within each of these categories, separate equations are set forth for noncarcinogens and carcinogens. Since RBCA offers two different ways to evaluate the soil remediation objectives, the smaller, or more stringent, of the two values will be the remediation objective (either equation R1 or R7 for carcinogens and equation R2 or R8 for noncarcinogens).

Unlike the SSL approach, which sets forth separate equations for each exposure route for each type of land use, RBCA does not have separate equations for each type of land use. Instead, RBCA allows for differences in the type of land use to be reflected in the values of certain parameters. Because RBCA groups ingestion and inhalation into the same equations, one model is to be used in Tier 2 for the inhalation and ingestion exposure routes. Either the RBCA or SSL models can be used for the soil component of the groundwater exposure route.

The requirements concerning the cumulative effect of noncarcinogenic chemicals for soil remediation are at Section 742.720. Appendix A, Table E sets forth groups of chemicals from Appendix B, Tables A and B, that have remediation objectives based on noncarcinogenic toxicity, and that affect the same target organ. If more than one chemical detected at the site affects the same target organ, the applicant must correct the initially calculated remediation value for each chemical in the group.

Subpart H: Tier 2 Groundwater Evaluation

Subpart H contains the procedures for developing Tier 2 groundwater remediation objectives. If the contaminants of concern exceed the applicable Tier 1 remediation objectives, an applicant has several choices. As preliminary to a Tier 1 analysis, the applicant can as a preliminary matter, demonstrate that the pathway is excluded, that the contamination is at or below the area background concentration in accordance with Subpart D, or conduct a Tier 3 analysis. There are also two alternatives distinctive to groundwater remediation objectives available. An applicant can seek from the Board reclassification of the contaminated groundwater pursuant to 35 Ill. Adm. Code 620.260, or an adjusted standard pursuant to Section 28.1 of the Act. However, should an applicant choose to develop Tier 2 groundwater remediation objectives, the applicant must use RBCA Equation R26. Using this equation, the applicant can develop remediation objectives which exceed the applicable Part 620 groundwater standards at the site, but which will meet the applicable groundwater standards at the point of human exposure.

Pursuant to Section 742.805, before developing a Tier 2 groundwater remediation objective, the applicant must first identify the horizontal and vertical extent of the contamination, and, to the extent practicable, take remedial action to remove any free product. The applicant can then use RBCA Equation R26 to demonstrate that the applicable groundwater standards will be achieved at the point of human exposure. The basis and application of Equation R26 to predict impacts from remaining groundwater contamination are explained in Section 742.810.

Equation R26 predicts the concentration of a contaminant along the centerline of a plume, taking into account the three dimensional dispersion and biodegradation. Using Equation R26, the applicant can demonstrate that, although the concentration of a contaminant exceeds the applicable Tier 1 objective at the source, the concentration at the point of human exposure will meet either the applicable Tier 1 groundwater remediation objective, or if no Tier 1 objective exists, the applicable Health Advisory concentration as determined in accordance with the procedures set forth in 35 Ill. Adm. Code 620, Subpart F. If the applicant determines that the applicable Tier 1 objective will be exceeded at the point of human exposure, the applicant can back-calculate the concentration that must be achieved at the source in order for the compliance to be achieved.

In addition to demonstrating that the applicable Tier 1 objective will be achieved at the point of human exposure, in order to demonstrate compliance pursuant to Tier 2, the applicant must demonstrate that five additional requirements are satisfied. First, using Equation R26, the applicant must demonstrate that the concentration of any contaminant in groundwater within the minimum or designated maximum setback zone of an existing potable water supply well will meet the applicable Tier 1 groundwater objective or the Health Advisory concentration⁴. Second, the applicant must demonstrate that the source of the release is not located within the minimum or designated maximum setback zone of a potable water supply well. Third, the applicant must use Equation R26 to demonstrate that the concentration of any contaminant in groundwater discharging into surface water will meet the applicable water quality standard pursuant to 35 Ill. Adm. Code 302. Fourth, the applicant must demonstrate that any groundwater remediation objective established pursuant to this procedure does not exceed the water solubility for that contaminant. Finally, if the remediation relies on an engineered barrier, the applicant must demonstrate that an institutional control is in place requiring that the barrier remain in place. These requirements are set forth at Section 742.805 and illustrated at Appendix C: Illustration B.

During the public comment period, the Board received a public comment questioning whether the R26 equation in the RBCA guidelines has been properly adapted for use in establishing risk based remediation objectives under Tier 2. The commentator urged the Board to change the last *erf* (error function) term in the denominator of Equation R26 from 4 to 2. (PC 6.) The Agency supports the change. (PC 10 at 12-13; PC 22.) Since the supporting documents indicate that the use of the incorrect number (4) for the vertical dispersion results in under-prediction of concentrations of contaminants along the centerline of a plume, the Board adopts Equation R26 by changing the constant value for the *erf* relating to vertical dispersion from 4 to 2. Equation R15, essentially the same equation, is also changed where it appears in the rules.

⁴ Health Advisory concentrations are established in accordance with 35 Ill. Adm. Code 620, Subpart F for contaminants that do not have a groundwater quality standard under Part 620, Subpart D.

Section 742.810 contains another provision regarding the distance between an existing potable water supply well and the source of contamination. Minimum setback zones are established pursuant to Section 14.2(g) of the Act and maximum setback zones are established on a site-specific basis. Either the minimum or maximum setback zone can be used, whichever is closer. However, the minimum setback zone is to be used unless the maximum setback zone is established.

Section 742.810(b)(1) provides the procedure for demonstrating that no existing potable water supply is adversely impacted by a remediation site. Essentially, the revisions to subsection (b)(1) require an applicant to calculate the distance "X" from the downgradient edge of the source to the point where the contaminant concentration is equal to the Tier 1 groundwater remediation objective or Health Advisory concentration. If there are any potable water supply wells located within the distance X downgradient of the source, then the applicable groundwater remediation objectives must be met at the edge of the minimum or designated maximum setback zone. If no potable water supply wells exist within the calculated distance X, then it can be determined that no potable water supply wells are adversely impacted.

Subpart I: Tier 3 Evaluation

Tier 3 allows the applicant to develop remediation objectives using alternative parameters not found in Tier 1 or Tier 2. It allows the applicant great flexibility in developing remediation objectives appropriate for a particular site based upon site-specific information, rather than relying on general categories of information. The options available under Tier 3 include: use of modified parameters in the Tier 2 equations, use of alternative models, conducting a site-specific risk assessment, use of probabilistic analysis and sophisticated fate and transport models, assessment of impractical remediation, and variation of the target risk level. If any contaminants of concern are found to exceed the remediation objectives developed using the Tier 3 analysis, the applicant would be required to remediate the contamination until the objectives are achieved. The applicant must provide appropriate justification for the use and application of any alternative parameters, models, or analysis relied upon in a Tier 3 evaluation.

Tier 1 remediation objectives and Tier 2 equations are based upon a one-in-a-million individual excess cancer risk for carcinogens and a hazard quotient of one for noncarcinogens. (Exh. 4 at 12 & 21.) Changes in the target risk levels are allowed under Tier 3. Section 742.900(d) clearly sets forth that requests for changes in target risk levels at the point of human exposure level must be supported with a formal risk assessment conducted in accordance with Section 742.915. Section 742.915(h) contains four factors critical in such a risk assessment. Those factors are: 1) the presence of sensitive populations; 2) the number of receptors potentially impacted; 3) the duration of risk at the differing target levels; and 4) the characteristics of the contaminants of concern.

Pursuant to Section 58.5(d)(4) of the Act, an applicant can seek site-specific remediation objectives which exceed the Tier 1 remediation objectives, *i.e.*, the Board's groundwater quality standards at Part 620, under Tier 3. To obtain such an exception, the Act requires two demonstrations. First, the applicant must demonstrate that the exceedence of the groundwater quality standard has been minimized and the beneficial use of the groundwater has been returned, and that any threat to human health has also been minimized. These two statutory requirements are incorporated verbatim into the rules at Section 742.900(c)(9). Since the right to exceed groundwater quality standards, adopted by the Board as the level at which human health is protected, is available only due to this statutory exception, it is most important that the demonstration to obtain such a right comply with the these statutory requirements.

Subpart J: Institutional Controls

Institutional controls are defined under the proposed rules as "a legal mechanism for imposing a restriction on land use." The Agency testified that institutional controls are a fundamental part of the proposal, and are the key to assuring long-term protection of human health, while providing flexibility in developing practical, risk-based remediation objectives. (Exh. 3 at 1.) The applicant must obtain an institutional control whenever the applicant seeks to take any of the following measures, or any combination thereof: 1) restrict a property to industrial/commercial use; 2) establish remediation objectives based on a target cancer risk greater than 1 in 1,000,000; 3) establish a target hazard quotient greater than 1 for a noncarcinogen under a Tier 3 analysis; 4) rely on an engineered barrier; 5) set the point of human exposure at a location other than at the source; or 6) exclude exposure pathways under Subpart C. An institutional control is transferred with the property.

Pursuant to Subpart J, the following types of institutional controls are recognized under these rules: 1) No Further Remediation Letters; 2) restrictive covenants, deed restrictions, and negative easements; 3) ordinances adopted and administered by a unit of local government; and 4) agreements between a property owner and a highway authority with respect to any contamination remaining under highways. The requirements for each of these categories are set forth in a separate section.

The requirements for a No Further Remediation Letter are set forth at Section 742.1005. Subsection (b) therein provides that "a request for approval of a No Further Remediation Letter as an institutional control shall follow the requirements applicable to the remediation program under which the remediation is performed." The TACO rules are intended to establish a method for deriving corrective action objectives for remedial programs. Specific provisions concerning the effectiveness and limitations on No Further Remediation Letters and other instruments memorializing a no further remediation determination by the Agency are more appropriately set forth in the specific programs pursuant to which such a determination is made.

The requirements for restrictive covenants, deed restrictions, and negative easements are set forth at Section 742.1010. These measures are to be used only in situations where a No Further Remediation Letter is not available, and it is not necessary to obtain restrictive covenants, deed restrictions, or negative easements which duplicate conditions set forth in a No Further Remediation Letter that is appropriately recorded. Restrictive covenants, deed restrictions, and negative easements approved by the Agency in accordance with this Section must be appropriately recorded, together with the instrument memorializing the Agency's no further remediation determination, *e.g.*, a No Further Remediation Letter.

Section 742.1015 sets forth the requirements for ordinances used as an institutional control. The use of an ordinance as an institutional control is specifically limited to ordinances that effectively prohibit the installation of potable water supply wells in order to meet the requirements of Section 742.320(d) or 742.805(a)(3). Unless the Agency and the unit of local government have entered into a Memorandum of Understanding (MOU), this section places the burden on the owner or successor in interest for monitoring the local governments activities with respect to the ordinance. If the ordinance is modified, or if a variance or other site-specific request is granted that allows use of the groundwater at the site as a potable water supply, or if the terms of another institutionally control at the site are violated, the use of the ordinance as an institutional control can be voided.

Given the potential human health risk and the cost of groundwater remediation and installation of potable water supply wells, it makes sense to be forewarned about potential problems concerning a groundwater source. Moreover, most of the existing ordinances were not enacted by considering environmental concerns. In this regard, the regulation provides an opportunity to a unit of local government to adopt an ordinance based upon the consideration of environmental concerns. The requirements concerning the MOU at Section 742.1015(i) require the unit of local government to make a commitment to: maintain a registry of all sites within its boundaries which have received a No Further Remediation Letter and review the registry of sites prior to siting potable water supply well; consider if groundwater contamination from the sites on the registry may be present at potential well sites; and take appropriate protective measures if wells are sited in the vicinity of such locations. By requiring the local government to enter into an MOU and abiding by the commitments contained therein will forewarn communities of the existence of contamination plumes and may prevent costly mistakes in siting, construction, and use of public potable water supply wells. This provision is cross referenced at Sections 742.320(d) and 742.805(a)(3).

Finally, Section 742.1020 sets forth the requirements applicable to highway authority agreements used as an institutional control. When contamination level of the groundwater exceed the Tier 1 residential levels, the highway authority must agree to prohibit the use of groundwater under the highway right-of-way as a potable water supply. When the contamination of the soil under the highway right of way exceeds the Tier 1 residential level, the highway authority must agree to limit access to soil contamination, and in the event access is allowed, human health and the environment must be protected.

Subpart K: Engineered Barriers

An engineered barrier is defined in Section 742.200 as a barrier designed or verified using engineering practices that limits exposure to or controls migration of the contaminants of concern. The Agency testified that, in addition to including man-made structures designed using engineering practices, engineered barriers could include native or *in-situ* materials if their effectiveness is verified using engineering practices. (Exh. 3 at 7) The use and maintenance of an engineered barrier must be accompanied by an institutional control in accordance with Subpart J. Furthermore, any no further remediation determination by the Agency based on the use of the engineered barrier must be conditioned upon maintenance of the engineered barrier, and the institutional control must address provisions for temporary breaches of the engineered barrier. Failure to maintain an engineered barrier in accordance with the terms of the no further remediation determination constitutes grounds for voidance of that determination.

Section 742.1105 sets forth the requirements for engineered barriers and limitations on their use in achieving remediation objectives. It makes clear that natural attenuation, access controls and point of use treatment do not fall within the definition of engineered barriers, and that engineered barriers cannot be relied upon in determining compliance with Tier 1 remediation objectives. Subsection (c) of this Section sets forth a list of engineered barriers accepted for each exposure route. For the soil component of the groundwater ingestion exposure route, these include caps constructed of clay, asphalt, or concrete, and permanent structures, such as buildings or highways. For the soil ingestion and inhalation exposure routes, the acceptable engineered barriers include clean soil at least three feet in depth, as well as caps and permanent structures. Finally, for the groundwater component, the acceptable engineered barriers include slurry walls and hydraulic control of groundwater. Subsection (d) of this Section makes it clear that the list of accepted measures is not intended to be exhaustive and that other methods will be accepted by the Agency if they are shown to be as effective as the listed options.

SUMMARY

The Board hereby adopts as final the new Part 742, Tiered Approach to Corrective Action Objectives. The Board has examined the substantive issues concerning the proposal initially filed by the Agency and the record and modification to the Agency's proposal developed during this rulemaking. The Board has reserved one issue for a separate Docket B. That issue is to what extent the mixture rule adopted today should be modified to insure that risk based remediation objectives determined using TACO are protective of human health. The Board concludes that the TAOC rules set forth in the attached order provide a tiered approach for assessing risk to human health when determining remediation objectives and the methodologies acceptable for doing so on a site-specific basis. The Board further finds that these rules are economically reasonable and technically feasible. The Board anticipates that these rules will be used successfully in conjunction with the remediation programs contained in other Board rules to remediate contamination at properties throughout Illinois based on risk of

human exposure and that future uses of such properties will not be modified without consideration of the adequacy of the risk-based remediation. Finally, the Board looks forward to a proposal from the Agency addressing the risk-based methodology necessary to protect the environment.

ORDER

The Board hereby directs that the final notice of the following adopted rules be submitted to the Secretary of State for publication in the <u>Illinois Register</u>.

TITLE 35: ENVIRONMENTAL PROTECTION
SUBTITLE G: WASTE DISPOSAL
CHAPTER I: POLLUTION CONTROL BOARD
SUBCHAPTER f: RISK BASED CLEANUP OBJECTIVES

PART 742 TIERED APPROACH TO CORRECTIVE ACTION OBJECTIVES

SUBPART A: INTRODUCTION

742.110	Overview of Tiered Approach
742.115	**
742.120	Site Characterization
	SUBPART B: GENERAL
Section	
742.200	Definitions
742.205	Severability
742.210	Incorporations by Reference
742.215	Determination of Soil Attenuation Capacity
742.220	Determination of Soil Saturation Limit
742.225	Demonstration of Compliance with Remediation Objectives
742.230	Agency Review and Approval
	SUBPART C: EXPOSURE ROUTE EVALUATIONS
Section	
742.300	Exclusion of Exposure Route
742.305	Contaminant Source and Free Product Determination
742.310	Inhalation Exposure Route

Section 742.100

742.105

Intent and Purpose Applicability

	29
742.315	Soil Ingestion Exposure Route
742.320	Groundwater Ingestion Exposure Route
	SUBPART D: DETERMINING AREA BACKGROUND
Q4'	
Section	A D 1 1
742.400	Area Background
742.405	Determination of Area Background for Soil
742.410	Determination of Area Background for Groundwater
742.415	Use of Area Background Concentrations
	SUBPART E: TIER 1 EVALUATION
Section	
742.500	Tier 1 Evaluation Overview
742.505	Tier 1 Soil and Groundwater Remediation Objectives
742.510	Tier 1 Remediation Objectives
	SUBPART F: TIER 2 GENERAL EVALUATION
Section	
742.600	Tier 2 Evaluation Overview
742.605	Land Use
742.610	Chemical and Site Properties
	SUBPART G: TIER 2 SOIL EVALUATION
Section	
742.700	Tier 2 Soil Evaluation Overview
742.705	Parameters for Soil Remediation Objective Equations
742.710	SSL Soil Equations
742.715	RBCA Soil Equations
742.720	Chemicals with Cumulative Noncarcinogenic Effects
	CURDART II. TIER 2 CROUNDWATER EVALUATION
	SUBPART H: TIER 2 GROUNDWATER EVALUATION
Section	
742.800	Tier 2 Groundwater Evaluation Overview
742.805	Tier 2 Groundwater Remediation Objectives
742.803	Calculations to Predict Impacts from Remaining Groundwater Contamination
772.010	Calculations to Fredict Impacts from Remaining Groundwater Containination

SUBPART I: TIER 3 EVALUATION

Section			
742.900	Tier 3 Evaluation Overview		
742.905	Modifications of Parameters		
742.910	Alternative Models		
742.915	Formal Risk Assessments		
742.920	Impractical Remediation		
742.925	Exposure Routes		
742.930	Derivation of Toxicological Data		
SUBPART J: INSTITUTIONAL CONTROLS			
Section			
742.1000	Institutional Controls		
742.1005	No Further Remediation Letters		
742.1010	Restrictive Covenants, Deed Restrictions and Negative Easements		
742.1015	Ordinances		
742.1020	Highway Authority Agreements		
SUBPART K: ENGINEERED BARRIERS			
Section			
742.1100	Engineered Barriers		
742.1105	Engineered Barrier Requirements		
APPENDIX	A General		
	STRATION A Developing Soil Remediation Objectives Under the Tiered		
	Approach		
ILLU	STRATION B Developing Groundwater Remediation Objectives Under the Tiered Approach		
Table	A Soil Saturation Limits (C_{sat}) for Chemicals Whose Melting Point is Less Than $30^{\circ}C$		
Table	B Tolerance Factor (K)		
Table	C Coefficients $\{A_{N-1+1}\}\$ for W Test of Normality, for $N=2(1)50$		
Table	•		
Table	E Chemicals with Noncarcinogenic Toxic Effects on Specific Target Organs/Organ Systems or Similar Modes of Action		
Table	F Chemicals with Carcinogenic Toxic Effects on Specific Target Organs/Organ Systems or Similar Modes of Action		
Table			
APPENDIX			
ILLU	STRATION A Tier 1 Evaluation		
Table	J 1		
Table	B Tier 1 Soil Remediation Objectives for Industrial/Commercial Properties		

Table C	pH Specific Soil Remediation Objectives for Inorganics and Ionizing
	Organics for the Soil Component of the Groundwater Ingestion Route
	(Class I Groundwater)
Table D	pH Specific Soil Remediation Objectives for Inorganics and Ionizing
	Organics for the Soil Component of the Groundwater Ingestion Route
	(Class II Groundwater)
Table E	Tier 1 Groundwater Remediation Objectives for the Groundwater
	Component of the Groundwater Ingestion Route
Table F	Values Used to Calculate the Tier 1 Soil Remediation Objectives for the
	Soil Component of the Groundwater Ingestion Route
APPENDIX C	Tier 2 Tables and Illustrations
ILLUSTRAT	ION A Tier 2 Evaluation for Soil
ILLUSTRAT	ION B Tier 2 Evaluation for Groundwater
ILLUSTRAT	ION C US Department of Agriculture Soil Texture Classification
Table A	SSL Equations
Table B	SSL Parameters
Table C	RBCA Equations
Table D	RBCA Parameters
Table E	Default Physical and Chemical Parameters
Table F	Methods for Determining Physical Soil Parameters
Table G	Error Function (erf)
Table H	Q/C Values by Source Area
Table I	K _∞ Values for Ionizing Organics as a Function of pH (cm³/g or L/kg)
Table J	Values to be Substituted for ks When Evaluating Inorganics as a Function
	of pH (cm ³ water/g _{soil})
Table K	Parameter Estimates for Calculating Water-Filled Soil Porosity (θ_w)

AUTHORITY: Implementing Sections 22.4, 22.12, Title XVI, and Title XVII and authorized by Sections 27, 57.14, and 58.5 of the Environmental Protection Act [415 ILCS 5/22.4, 22.12, Title XVI and Title VII] (see P.A. 88-496, effective September 13, 1993 and P.A. 89-0431, effective December 15, 1995).

SOURCE: Adopted at 21 Ill. Reg. ______, effective July 1, 1997.

NOTE: Capitalization indicates statutory language.

32 SUBPART A: INTRODUCTION

Section 742.100 Intent and Purpose

- a) This Part sets forth procedures for evaluating the risk to human health posed by environmental conditions and developing remediation objectives that achieve acceptable risk levels.
- b) The purpose of these procedures is to provide for the adequate protection of human health and the environment based on the risks to human health posed by environmental conditions while incorporating site related information.

Section 742.105 Applicability

- a) Any person, including a person required to perform an investigation pursuant to the Illinois Environmental Protection Act (415 ILCS 5/1 et seq.) (Act), may elect to proceed under this Part to the extent allowed by State or federal law and regulations and the provisions of this Part. A person proceeding under this Part may do so to the extent such actions are consistent with the requirements of the program under which site remediation is being addressed.
- b) This Part is to be used in conjunction with the procedures and requirements applicable to the following programs:
 - 1) Leaking Underground Storage Tanks (35 Ill. Adm. Code 731 and 732);
 - 2) Site Remediation Program (35 Ill. Adm. Code 740); and
 - 3) RCRA Part B Permits and Closure Plans (35 Ill. Adm. Code 724 and 725).
- c) The procedures in this Part may not be used if their use would delay response action to address imminent and substantial threats to human health and the environment. This Part may only be used after actions to address such threats have been completed.
- d) This Part may be used to develop remediation objectives to protect surface waters, sediments or ecological concerns, when consistent with the regulations of other programs, and as approved by the Agency.

- e) A no further remediation determination issued by the Agency prior to July 1, 1997 pursuant to Section 4(y) of the Act or one of the programs listed in subsection (b) of this Section that approves completion of remedial action relative to a release shall remain in effect in accordance with the terms of that determination.
- f) Site specific groundwater remediation objectives determined under this Part for contaminants of concern may exceed the groundwater quality standards established pursuant to the rules promulgated under the Illinois Groundwater Protection Act (415 ILCS 55) as long as done in accordance with Sections 742.805(a) and 742.900(c)(9). [See 415 ILCS 5/58.5(d)(4).]
- g) Where contaminants of concern include polychlorinated biphenyls (PCBs), a person may need to evaluate the applicability of regulations adopted under the Toxic Substances Control Act. (15 U.S.C. 2601)

Section 742.110 Overview of Tiered Approach

- a) This Part presents an approach for developing remediation objectives (see Appendix A, Illustrations A and B) that include an option for exclusion of pathways from further consideration, use of area background concentrations as remediation objectives and three tiers for selecting applicable remediation objectives. An understanding of human exposure routes is necessary to properly conduct an evaluation under this approach. In some cases, applicable human exposure route(s) can be excluded from further consideration prior to any tier evaluation. Selecting which tier or combination of tiers to be used to develop remediation objectives is dependent on the site-specific conditions and remediation goals. Tier 1 evaluations and Tier 2 evaluations are not prerequisites to conducting Tier 3 evaluations.
- b) A Tier 1 evaluation compares the concentration of contaminants detected at a site to the corresponding remediation objectives for residential and industrial/commercial properties contained in Appendix B, Tables A, B, C, D and E. To complete a Tier 1 evaluation, the extent and concentrations of the contaminants of concern, the groundwater class, the land use classification, human exposure routes at the site, and, if appropriate, soil pH, must be known. If remediation objectives are developed based on industrial/commercial property use, then institutional controls under Subpart J are required.
- c) A Tier 2 evaluation uses the risk based equations from the Soil Screening Level (SSL) and Risk Based Corrective Action (RBCA) listed in Appendix C, Tables A and C, respectively. In addition to the information that is required for a Tier 1 evaluation, site-specific information is used to calculate Tier 2 remediation

objectives. As in Tier 1, Tier 2 evaluates residential and industrial/commercial properties only. If remediation objectives are developed based on industrial/commercial property use, then institutional controls under Subpart J are required.

- d) A Tier 3 evaluation allows alternative parameters and factors, not available under a Tier 1 or Tier 2 evaluation, to be considered when developing remediation objectives. Remediation objectives developed for conservation and agricultural properties can only be developed under Tier 3.
- e) Remediation objectives may be developed using area background concentrations or any of the three tiers if the evaluation is conducted in accordance with applicable requirements in Subparts D through I. When contaminant concentrations do not exceed remediation objectives developed under one of the tiers or area background procedures under Subpart D, further evaluation under any of the other tiers is not required.

Section 742.115 Key Elements

To develop remediation objectives under this Part, the following key elements shall be addressed.

- a) Exposure Routes
 - 1) This Part identifies the following as potential exposure routes to be addressed:
 - A) Inhalation;
 - B) Soil ingestion;
 - C) Groundwater ingestion; and
 - D) Dermal contact with soil.
 - The evaluation of exposure routes under subsections (a)(1)(A),(a)(1)(B) and (a)(1)(C) of this Section is required for all sites when developing remediation objectives or excluding exposure pathways. Evaluation of the dermal contact exposure route is required for use of RBCA equations in Appendix C, Table C or use of formal risk assessment under Section 742.915.

- 3) The groundwater ingestion exposure route is comprised of two components:
 - A) Migration from soil to groundwater (soil component); and
 - B) Direct ingestion of groundwater (groundwater component).

b) Contaminants of Concern

The contaminants of concern to be remediated depend on the following:

- 1) The materials and wastes managed at the site;
- 2) The extent of the no further remediation determination being requested from the Agency pursuant to a specific program; and
- The requirements applicable to the specific program, as listed at Section 742.105(b) under which the remediation is being performed.

c) Land Use

The present and post-remediation uses of the site where exposures may occur shall be evaluated. The land use of a site, or portion thereof, shall be classified as one of the following:

- 1) Residential property;
- 2) Conservation property;
- 3) Agricultural property; or
- 4) Industrial/commercial property.

Section 742.120 Site Characterization

Characterization of the extent and concentrations of contamination at a site shall be performed before beginning development of remediation objectives. The actual steps and methods taken to characterize a site are determined by the requirements applicable to the specific program under which site remediation is being addressed.

SUBPART B: GENERAL

Section 742.200 Definitions

Except as stated in this Section, or unless a different meaning of a word or term is clear from the context, the definition of words or terms in this Part shall be the same as that applied to the same words or terms in the Act.

"Act" means the Illinois Environmental Protection Act (415 ILCS 5/1 et seq.).

"ADL" means Acceptable Detection Limit, which is the detectable concentration of a substance which is equal to the lowest appropriate Practical Quantitation Limit (POL) as defined in this Section.

"Agency" means the Illinois Environmental Protection Agency.

"Agricultural Property" means any real property for which its present or postremediation use is for growing agricultural crops for food or feed either as harvested crops, cover crops or as pasture. This definition includes, but is not limited to, properties used for confinement or grazing of livestock or poultry and for silviculture operations. Excluded from this definition are farm residences, farm outbuildings and agrichemical facilities.

"Area Background" means CONCENTRATIONS OF REGULATED SUBSTANCES THAT ARE CONSISTENTLY PRESENT IN THE ENVIRONMENT IN THE VICINITY OF A SITE THAT ARE THE RESULT OF NATURAL CONDITIONS OR HUMAN ACTIVITIES, AND NOT THE RESULT SOLELY OF RELEASES AT THE SITE. (Section 58.2 of the Act)

"ASTM" means the American Society for Testing and Materials.

"Board" means the Illinois Pollution Control Board.

"Cancer Risk" means a unitless probability of an individual developing cancer from a defined exposure rate and frequency.

"Cap" means a barrier designed to prevent the infiltration of precipitation or other surface water, or impede the ingestion or inhalation of contaminants.

"Carcinogen" means A CONTAMINANT THAT IS CLASSIFIED AS A CATEGORY A1 OR A2 CARCINOGEN BY THE AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS; A CATEGORY 1 OR 2A/2B CARCINOGEN BY THE WORLD HEALTH

ORGANIZATION'S INTERNATIONAL AGENCY FOR RESEARCH ON CANCER; A "HUMAN CARCINOGEN" OR "ANTICIPATED HUMAN CARCINOGEN" BY THE UNITED STATES DEPARTMENT OF HEALTH AND HUMAN SERVICE NATIONAL TOXICOLOGICAL PROGRAM; OR A CATEGORY A OR B1/B2 CARCINOGEN BY THE UNITED STATES ENVIRONMENTAL PROTECTION AGENCY IN the INTEGRATED RISK INFORMATION SYSTEM OR A FINAL RULE ISSUED IN A FEDERAL REGISTER NOTICE BY THE USEPA. (Section 58.2 of the Act)

"Class I Groundwater" means groundwater that meets the Class I: Potable Resource Groundwater criteria set forth in 35 Illinois Administrative Code 620.

"Class II Groundwater" means groundwater that meets the Class II: General Resource Groundwater criteria set forth in 35 Illinois Administrative Code 620.

"Conservation Property" means any real property for which present or postremediation use is primarily for wildlife habitat.

"Construction Worker" means a person engaged on a temporary basis to perform work involving invasive construction activities including, but not limited to, personnel performing demolition, earth-moving, building, and routine and emergency utility installation or repair activities.

"Contaminant of Concern" or "Regulated Substance of Concern" means ANY CONTAMINANT THAT IS EXPECTED TO BE PRESENT AT THE SITE BASED UPON PAST AND CURRENT LAND USES AND ASSOCIATED RELEASES THAT ARE KNOWN TO THE person conducting a remediation BASED UPON REASONABLE INQUIRY. (Section 58.2 of the Act)

"Engineered Barrier" means a barrier designed or verified using engineering practices that limits exposure to or controls migration of the contaminants of concern.

"Exposure Route" means the transport mechanism by which a contaminant of concern reaches a receptor.

"Free Product" means a contaminant that is present as a non-aqueous phase liquid for chemicals whose melting point is less than 30°C (e.g., liquid not dissolved in water).

"GROUNDWATER" MEANS UNDERGROUND WATER WHICH OCCURS WITHIN THE SATURATED ZONE AND GEOLOGIC MATERIALS WHERE THE FLUID PRESSURE IN THE PORE SPACE IS EQUAL TO OR GREATER THAN ATMOSPHERIC PRESSURE. (Section 3.64 of the Act)

"Groundwater Quality Standards" means the standards for groundwater as set forth in 35 Illinois Administrative Code 620.

"Hazard Quotient" means the ratio of a single substance exposure level during a specified time period to a reference dose for that substance derived from a similar exposure period.

"Highway" means ANY PUBLIC WAY FOR VEHICULAR TRAVEL WHICH HAS BEEN LAID OUT IN PURSUANCE OF ANY LAW OF THIS STATE, OR OF THE TERRITORY OF ILLINOIS, OR WHICH HAS BEEN ESTABLISHED BY DEDICATION, OR USED BY THE PUBLIC AS A HIGHWAY FOR 15 YEARS, OR WHICH HAS BEEN OR MAY BE LAID OUT AND CONNECT A SUBDIVISION OR PLATTED LAND WITH A PUBLIC HIGHWAY AND WHICH HAS BEEN DEDICATED FOR THE USE OF THE OWNERS OF THE LAND INCLUDED IN THE SUBDIVISION OR PLATTED LAND WHERE THERE HAS BEEN AN ACCEPTANCE AND USE UNDER SUCH DEDICATION BY SUCH OWNERS, AND WHICH HAS NOT BEEN VACATED IN PURSUANCE OF LAW. THE TERM "HIGHWAY" INCLUDES RIGHTS OF WAY, BRIDGES, DRAINAGE STRUCTURES, SIGNS, GUARD RAILS, PROTECTIVE STRUCTURES AND ALL OTHER STRUCTURES AND APPURTENANCES NECESSARY OR CONVENIENT FOR VEHICULAR TRAFFIC. A HIGHWAY IN A RURAL AREA MAY BE CALLED A "ROAD", WHILE A HIGHWAY IN A MUNICIPAL AREA MAY BE CALLED A "STREET". (Illinois Highway Code [605 ILCS 5/2-202])

"Highway Authority" means THE DEPARTMENT of Transportation WITH RESPECT TO A STATE HIGHWAY; THE COUNTY BOARD WITH RESPECT TO A COUNTY HIGHWAY OR A COUNTY UNIT DISTRICT ROAD IF A DISCRETIONARY FUNCTION IS INVOLVED AND THE COUNTY SUPERINTENDENT OF HIGHWAYS IF A MINISTERIAL FUNCTION IS INVOLVED; THE HIGHWAY COMMISSIONER WITH RESPECT TO A TOWNSHIP OR DISTRICT ROAD NOT IN A COUNTY UNIT ROAD DISTRICT; OR THE CORPORATE AUTHORITIES OF A MUNICIPALITY WITH RESPECT TO A MUNICIPAL STREET. (Illinois Highway Code [605 ILCS 5/2-213])

"Human Exposure Pathway" means a physical condition which may allow for a risk to human health based on the presence of all of the following: contaminants of concern; an exposure route; and a receptor activity at the point of exposure that could result in contaminant of concern intake.

"Industrial/Commercial Property" means any real property that does not meet the definition of residential property, conservation property or agricultural property.

"Infiltration" means the amount of water entering into the ground as a result of precipitation.

"Institutional Control" means a legal mechanism for imposing a restriction on land use, as described in Subpart J.

"Man-Made Pathways" means CONSTRUCTED physical conditions THAT MAY ALLOW FOR THE TRANSPORT OF REGULATED SUBSTANCES INCLUDING, BUT NOT LIMITED TO, SEWERS, UTILITY LINES, UTILITY VAULTS, BUILDING FOUNDATIONS, BASEMENTS, CRAWL SPACES, DRAINAGE DITCHES, OR PREVIOUSLY EXCAVATED AND FILLED AREAS. (Section 58.2 of the Act)

"Natural Pathways" means NATURAL physical conditions that may allow FOR THE TRANSPORT OF REGULATED SUBSTANCES INCLUDING, BUT NOT LIMITED TO, SOIL, GROUNDWATER, SAND SEAMS AND LENSES, AND GRAVEL SEAMS AND LENSES. (Section 58.2 of the Act)

"Negative Easement" means a right of the owner of the dominant or benefitted estate or property to restrict the property rights of the owner of the servient or burdened estate or property.

"Person" means an INDIVIDUAL, TRUST, FIRM, JOINT STOCK COMPANY, JOINT VENTURE, CONSORTIUM, COMMERCIAL ENTITY, CORPORATION (INCLUDING A GOVERNMENT CORPORATION), PARTNERSHIP, ASSOCIATION, STATE, MUNICIPALITY, COMMISSION, POLITICAL SUBDIVISION OF A STATE, OR ANY INTERSTATE BODY INCLUDING THE UNITED STATES GOVERNMENT AND EACH DEPARTMENT, AGENCY, AND INSTRUMENTALITY OF THE UNITED STATES. (Section 58.2 of the Act)

"Point of Human Exposure" means the point(s) at which human exposure to a contaminant of concern may reasonably be expected to occur. The point of human exposure is at the source, unless an institutional control limiting human exposure for the applicable exposure route has been or will be in place, in which case the point of human exposure will be the boundary of the institutional control. Point of human exposure may be at a different location than the point of compliance.

"PQL" means Practical Quantitation Limit or estimated quantitation limit, which is the lowest concentration that can be reliably measured within specified limits of precision and accuracy for a specific laboratory analytical method during routine laboratory operating conditions in accordance with "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods", EPA Publication No. SW-846, incorporated by reference in Section 742.210. When applied to filtered water samples, PQL includes the method detection limit or estimated detection limit in accordance with the applicable method revision in: "Methods for the Determination of Organic Compounds in Drinking Water", Supplement II", EPA Publication No. EPA/600/4-88/039; "Methods for the Determination of Organic Compounds in Drinking Water, Supplement III", EPA Publication No. EPA/600/R-95/131, all of which are incorporated by reference in Section 742.210.

"RBCA" means Risk Based Corrective Action as defined in ASTM E-1739-95, as incorporated by reference in Section 742.210.

"RCRA" means the Resource Conservation and Recovery Act of 1976. (42 U.S.C. 6921)

"Reference Concentration (RfC)" means an estimate of a daily exposure, in units of milligrams of chemical per cubic meter of air (mg/m³), to the human population (including sensitive subgroups) that is likely to be without appreciable risk of deleterious effects during a portion of a lifetime (up to approximately seven years, subchronic) or for a lifetime (chronic).

"Reference Dose (RfD)" means an estimate of a daily exposure, in units of milligrams of chemical per kilogram of body weight per day (mg/kg/d), to the human population (including sensitive subgroups) that is likely to be without appreciable risk of deleterious effects during a portion of a lifetime (up to approximately seven years, subchronic) or for a lifetime (chronic).

"Regulated Substance" means ANY HAZARDOUS SUBSTANCE AS DEFINED UNDER SECTION 101(14) OF THE COMPREHENSIVE ENVIRONMENTAL RESPONSE, COMPENSATION, AND LIABILITY ACT OF 1980 (P.L. 96-510) AND PETROLEUM PRODUCTS INCLUDING CRUDE OIL OR ANY FRACTION THEREOF, NATURAL GAS, NATURAL GAS LIQUIDS, LIQUEFIED NATURAL GAS, OR SYNTHETIC GAS USABLE FOR FUEL (OR MIXTURES OF NATURAL GAS AND SUCH SYNTHETIC GAS). (Section 58.2 of the Act)

"Residential Property" MEANS ANY REAL PROPERTY THAT IS USED FOR HABITATION BY INDIVIDUALS, OR where children have the opportunity for exposure to contaminants through soil ingestion or inhalation at

educational facilities, health care facilities, child care facilities or outdoor recreational areas.

"Restrictive Covenant or Deed Restriction" means a provision placed in a deed limiting the use of the property and prohibiting certain uses. (Black's Law Dictionary, 5th Edition)

"Right of Way" means THE LAND, OR INTEREST THEREIN, ACQUIRED FOR OR DEVOTED TO A HIGHWAY. (Illinois Highway Code [605 ILCS 5/2-217])

"Site" means ANY SINGLE LOCATION, PLACE, TRACT OF LAND OR PARCEL OF PROPERTY, OR PORTION THEREOF, INCLUDING CONTIGUOUS PROPERTY SEPARATED BY A PUBLIC RIGHT-OF-WAY. (Section 58.2 of the Act)

"Slurry Wall" means a man-made barrier made of geologic material which is constructed to prevent or impede the movement of contamination into a certain area.

"Soil Saturation Limit (C_{sat})" means the contaminant concentration at which soil pore air and pore water are saturated with the chemical and the adsorptive limits of the soil particles have been reached.

"Solubility" means a chemical specific maximum amount of solute that can dissolve in a specific amount of solvent (groundwater) at a specific temperature.

"SPLP" means Synthetic Precipitation Leaching Procedure (Method 1312) as published in "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods", USEPA Publication No. SW-846, as incorporated by reference in Section 742.210.

"SSL" means Soil Screening Levels as defined in USEPA's Soil Screening Guidance: User's Guide and Technical Background Document, as incorporated by reference in Section 742.210.

"Stratigraphic Unit" means a site-specific geologic unit of native deposited material and/or bedrock of varying thickness (e.g., sand, gravel, silt, clay, bedrock, etc.). A change in stratigraphic unit is recognized by a clearly distinct contrast in geologic material or a change in physical features within a zone of gradation. For the purposes of this Part, a change in stratigraphic unit is identified by one or a combination of differences in physical features such as texture, cementation, fabric, composition, density, and/or permeability of the native material and/or bedrock.

"TCLP" means Toxicity Characteristic Leaching Procedure (Method 1311) as published in "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods," USEPA Publication No. SW-846, as incorporated by reference in Section 742.210.

"Total Petroleum Hydrocarbon (TPH)" means the additive total of all petroleum hydrocarbons found in an analytical sample.

"Volatile Organic Compounds (VOCs)" means organic chemical analytes identified as volatiles as published in "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, "USEPA Publication No. SW-846 (incorporated by reference in Section 742.210), method numbers 8010, 8011, 8015, 8020, 8021, 8030, 8031, 8240, 8260, 8315, and 8316. For analytes not listed in any category in those methods, those analytes which have a boiling point less than 200°C and a vapor pressure greater than 0.1 Torr (mm Hg) at 20°C.

Section 742.205 Severability

If any provision of this Part or its application to any person or under any circumstances is adjudged invalid, such adjudication shall not affect the validity of this Part as a whole or any portion not adjudged invalid.

Section 742.210 Incorporations by Reference

a) The Board incorporates the following material by reference:

ASTM. American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103 (215) 299-5400

ASTM D 2974-87, Standard Test Methods for Moisture, Ash and Organic Matter of Peat and Other Organic Soils, approved May 29, 1987 (reapproved 1995).

ASTM D 2488-93, Standard Practice for Description and Identification of Soils (Visual-Manual Procedure), approved September 15, 1993.

ASTM D 1556-90, Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method, approved June 29, 1990.

ASTM D 2167-94, Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method, approved March 15, 1994.

ASTM D 2922-91, Standard Test Methods for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth), approved December 23, 1991.

ASTM D 2937-94, Standard Test Method for Density of Soil in Place by the Drive-Cylinder Method, approved June 15, 1994.

ASTM D 854-92, Standard Test Method for Specific Gravity of Soils, approved November 15, 1992.

ASTM D 2216-92, Standard Method for Laboratory Determination of Water (Moisture) Content of Soil and Rock, approved June 15, 1992.

ASTM D 4959-89, Standard Test Method for Determination of Water (Moisture) Content of Soil by Direct Heating Method, approved June 30, 1989 (reapproved 1994).

ASTM D 4643-93, Standard Test Method for Determination of Water (Moisture) Content of Soil by the Microwave Oven Method, approved July 15, 1993.

ASTM D 5084-90, Standard Test Method for Measurement of Hydraulic Conductivity of Saturated Porous Materials Using a Flexible Wall Permeameter, approved June 29, 1990.

ASTM D 422-63, Standard Test Method for Particle-Size Analysis of Soils, approved November 21, 1963 (reapproved 1990).

ASTM D 1140-92, Standard Test Method for Amount of Material in Soils Finer than the No. 200 (75 μ m) Sieve, approved November 15, 1992.

ASTM D 3017-88, Standard Test Method for Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth), approved May 27, 1988.

ASTM D 4525-90, Standard Test Method for Permeability of Rocks by Flowing Air, approved May 25, 1990.

ASTM D 2487-93, Standard Test Method for Classification of Soils for Engineering Purposes, approved September 15, 1993.

ASTM E 1527-93, Standard Practice for Environmental Site Assessments: Phase I Environmental Site Assessment Process, approved March 15, 1993. Vol. 11.04.

ASTM E 1739-95, Standard Guide for Risk-Based Corrective Action Applied at Petroleum Release Sites, approved September 10, 1995.

Barnes, Donald G. and Dourson, Michael. (1988). Reference Dose (RfD): Description and Use in Health Risk Assessments. *Regulatory Toxicology and Pharmacology*. 8, 471-486.

GPO. Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20401, (202) 783-3238.

USEPA Guidelines for Carcinogenic Risk Assessment, 51 Fed. Reg. 33992-34003 (September 24, 1986).

"Test Methods for Evaluating Solid Waste, Physical/Chemical Methods," USEPA Publication number SW-846 (Third Edition, November 1986), as amended by Updates I and IIA (Document No. 955-001-00000-1)(contact USEPA, Office of Solid Waste, for Update IIA).

"Methods for the Determination of Organic Compounds in Drinking Water", EPA Publication No. EPA/600/4-88/039 (December 1988 (Revised July 1991)).

"Methods for the Determination of Organic Compounds in Drinking Water, Supplement II", EPA Publication No. EPA/600/R-92/129 (August 1992).

"Methods for the Determination of Organic Compounds in Drinking Water, Supplement III", EPA Publication No. EPA/600/R-95/131 (August 1995).

IRIS. Integrated Risk Information System, National Center for Environmental Assessment, U.S. Environmental Protection Agency, 26 West Martin Luther King Drive, MS-190, Cincinnati, OH 45268. (513) 569-7254.

"Reference Dose (RfD): Description and Use in Health Risk Assessments", Background Document 1A (March 15, 1993).

"EPA Approach for Assessing the Risks Associated with Chronic Exposures to Carcinogens", Background Document 2 (January 17, 1992).

Nelson, D.W., and L.E. Sommers. 1982. Total carbon, organic carbon, and organic matter. In: A.L. Page (ed.), *Methods of Soil Analysis*. *Part 2*. *Chemical and Microbiological Properties*. *2nd Edition*, pp. 539-579, American Society of Agronomy. Madison, WI.

NTIS. National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161, (703) 487-4600.

"Dermal Exposure Assessment: Principles and Applications", EPA Publication No. EPA/600/8-91/011B (January 1992).

"Exposure Factors Handbook", EPA Publication No. EPA/600/8-89/043 (July 1989).

"Risk Assessment Guidance for Superfund, Vol. I; Human Health Evaluation Manual, Supplemental Guidance: Standard Default Exposure Factors", OSWER Directive 9285.6-03 (March 1991).

"Rapid Assessment of Exposure to Particulate Emissions from Surface Contamination Sites," EPA Publication No. EPA/600/8-85/002 (February 1985), PB 85-192219.

"Risk Assessment Guidance for Superfund, Volume I; Human Health Evaluation Manual (Part A)", Interim Final, EPA Publication No. EPA/540/1-89/002 (December 1989).

"Risk Assessment Guidance for Superfund, Volume I; Human Health Evaluation Manual, Supplemental Guidance, Dermal Risk Assessment Interim Guidance", Draft (August 18, 1992).

"Soil Screening Guidance: Technical Background Document", EPA Publication No. EPA/540/R-95/128, PB96-963502 (May 1996).

"Soil Screening Guidance: User's Guide", EPA Publication No. EPA/540/R-96/018, PB96-963505 (April 1996).

"Superfund Exposure Assessment Manual", EPA Publication No. EPA/540/1-88/001 (April 1988).

RCRA Facility Investigation Guidance, Interim Final, developed by USEPA (EPA 530/SW-89-031), 4 volumes (May 1989).

b) CFR (Code of Federal Regulations). Available from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402 (202) 783-3238:

40 CFR 761.120 (1993).

c) This Section incorporates no later editions or amendments.

Section 742.215 Determination of Soil Attenuation Capacity

- a) The concentrations of organic contaminants of concern remaining in the soil shall not exceed the attenuation capacity of the soil, as determined under subsection (b) of this Section.
- b) The soil attenuation capacity is not exceeded if:
 - The sum of the organic contaminant residual concentrations analyzed for the purposes of the remediation program for which the analysis is performed, at each discrete sampling point, is less than the natural organic carbon fraction of the soil. If the information relative to the concentration of other organic contaminants is available, such information shall be included in the sum. The natural organic carbon fraction (f_{oc}) shall be either:
 - A) A default value of 6000 mg/kg for soils within the top meter and 2000 mg/kg for soils below one meter of the surface; or
 - B) A site-specific value as measured by ASTM D2974-87, Nelson and Sommers, or by SW-846 Method 9060: Total Organic Carbon, as incorporated by reference in Section 742.210;
 - 2) The total petroleum hydrocarbon concentration is less than the natural organic carbon fraction of the soil as demonstrated using a method approved by the Agency. The method selected shall be appropriate for the contaminants of concern to be addressed; or
 - Another method, approved by the Agency, shows that the soil attenuation capacity is not exceeded.

Section 742.220 Determination of Soil Saturation Limit

a) For any organic contaminant that has a melting point below 30°C, the remediation objective for the inhalation exposure route developed under Tier 2

- or Tier 3 shall not exceed the soil saturation limit, as determined under subsection (c) of this Section.
- b) For any organic contaminant, the remediation objective under Tier 2 or Tier 3 for the soil component of the groundwater ingestion exposure route shall not exceed the soil saturation limit, as determined under subsection (c) of this Section.
- c) The soil saturation limit shall be:
 - 1) The value listed in Appendix A, Table A for that specific contaminant;
 - 2) A value derived from Equation S29 in Appendix C, Table A; or
 - 3) A value derived from another method approved by the Agency.

Section 742.225 Demonstration of Compliance with Remediation Objectives

Compliance is achieved if each sample result does not exceed that respective remediation objective unless a person elects to proceed under subsections (c), (d) and (e) of this Section.

- a) Compliance with groundwater remediation objectives developed under Subparts D through F and H through I shall be demonstrated by comparing the contaminant concentrations of discrete samples at each sample point to the applicable groundwater remediation objective. Sample points shall be determined by the program under which remediation is performed.
- b) Unless the person elects to composite samples or average sampling results as provided in subsections (c) and (d) of this Section, compliance with soil remediation objectives developed under Subparts D through G and I shall be demonstrated by comparing the contaminant concentrations of discrete samples to the applicable soil remediation objective.
 - 1) Except as provided in subsections (c) and (d) of this Section, compositing of samples is not allowed.
 - 2) Except as provided in subsections (c) and (d) of this Section, averaging of sample results is not allowed.
 - 3) Notwithstanding subsections (c) and (d) of this Section, compositing of samples and averaging of sample results is not allowed for the construction worker population.

- 4) The number of sampling points required to demonstrate compliance is determined by the requirements applicable to the program under which remediation is performed.
- c) If a person chooses to composite soil samples or average soil sample results to demonstrate compliance relative to the soil component of the groundwater ingestion exposure route, the following requirements apply:
 - 1) A minimum of two sampling locations for every 0.5 acre of contaminated area is required, with discrete samples at each sample location obtained at every two feet of depth, beginning at six inches below the ground surface and continuing through the zone of contamination. Alternatively, a sampling method may be approved by the Agency based on an appropriately designed site-specific evaluation. Samples obtained at or below the water table shall not be used in compositing or averaging.
 - 2) For contaminants of concern other than volatile organic contaminants:
 - A) Discrete samples from the same boring may be composited.
 - B) Discrete sample results from the same boring may be averaged.
 - 3) For volatile organic contaminants:
 - A) Compositing of samples is not allowed.
 - B) Discrete sample results from the same boring may be averaged.
- d) If a person chooses to composite soil samples or average soil sample results to demonstrate compliance relative to the inhalation exposure route or ingestion exposure route, the following requirements apply:
 - 1) A person shall submit a sampling plan for Agency approval, based upon a site-specific evaluation;
 - 2) For volatile organic compounds, compositing of samples is not allowed; and
 - 3) All samples shall be collected within the contaminated area.
- e) When averaging under this Section, if no more than 50% of sample results are reported as "non-detect", "no contamination", "below detection limits", or similar terms, such results shall be included in the averaging calculation as one-

half of the reported analytical detection limit for the contaminant. If more than 50% of sample results are "non-detect", another statistically valid procedure approved by the Agency may be used to determine an average.

Section 742.230 Agency Review and Approval

- a) Documents and requests filed with the Agency under this Part shall be submitted in accordance with the procedures applicable to the specific program under which remediation is performed.
- b) Agency review and approval of documents and requests under this Part shall be performed in accordance with the procedures applicable to the specific program under which the remediation is performed.

SUBPART C: EXPOSURE ROUTE EVALUATIONS

Section 742.300 Exclusion of Exposure Route

- a) This Subpart sets forth requirements to demonstrate that an actual or potential impact to a receptor or potential receptor from a contaminant of concern can be excluded from consideration from one or more exposure routes. If an evaluation under this Part demonstrates the applicable requirements for excluding an exposure route are met, then the exposure route is excluded from consideration and no remediation objective(s) need be developed for that exposure route.
- b) No exposure route may be excluded from consideration until characterization of the extent and concentrations of contaminants of concern at a site has been performed. The actual steps and methods taken to characterize a site shall be determined by the specific program requirements under which the site remediation is being addressed.
- c) As an alternative to the use of the requirements in this Part, a person may use the procedures for evaluation of exposure routes under Tier 3 as set forth in Section 742.925.

Section 742.305 Contaminant Source and Free Product Determination

No exposure route shall be excluded from consideration relative to a contaminant of concern unless the following requirements are met:

a) The sum of the concentrations of all organic contaminants of concern shall not exceed the attenuation capacity of the soil as determined under Section 742.215;

- b) The concentrations of any organic contaminants of concern remaining in the soil shall not exceed the soil saturation limit as determined under Section 742.220;
- c) Any soil which contains contaminants of concern shall not exhibit any of the characteristics of reactivity for hazardous waste as determined under 35 Ill. Adm. Code 721.123;
- d) Any soil which contains contaminants of concern shall not exhibit a pH less than or equal to 2.0 or greater than or equal to 12.5, as determined by SW-846 Method 9040B:pH Electrometric for soils with 20 % or greater aqueous (moisture) content or by SW-846 Method 9045C:Soil pH for soils with less than 20% aqueous (moisture) content as incorporated by reference in Section 742.210; and
- e) Any soil which contains contaminants of concern in the following list of inorganic chemicals or their salts shall not exhibit any of the characteristics of toxicity for hazardous waste as determined by 35 Ill. Adm. Code 721.124, or an alternative method approved by the Agency: arsenic, barium, cadmium, chromium, lead, mercury, selenium or silver.

Section 742.310 Inhalation Exposure Route

The inhalation exposure route may be excluded from consideration if:

- a) The requirements of Sections 742.300 and 742.305 are met; and
- b) An institutional control, in accordance with Subpart J, is in place that meets the following requirements:
 - 1) Either:
 - A) The concentration of any contaminant of concern the land surface or any man-made pathway shall not exceed the Tier 1 remediation objective under Subpart E for the inhalation exposure route; or
 - B) An engineered barrier, as set forth in Subpart K and approved by the Agency, is in place; and
 - 2) Requires safety precautions for the construction worker if the Tier 1 construction worker remediation objectives are exceeded.

Section 742.315 Soil Ingestion Exposure Route

The soil ingestion exposure route may be excluded from consideration if:

- a) The requirements of Sections 742.300 and 742.305 are met; and
- b) An institutional control, in accordance with Subpart J, is in place that meets the following requirements:
 - 1) Either:
 - A) The concentration of any contaminant of concern within three feet of the land surface shall not exceed the Tier 1 remediation objective under Subpart E for the ingestion of soil exposure route; or
 - B) An engineered barrier, as set forth in Subpart K and approved by the Agency, is in place; and
 - 2) Requires safety precautions for the construction worker if the Tier 1 construction worker remediation objectives are exceeded.

Section 742.320 Groundwater Ingestion Exposure Route

The groundwater ingestion exposure route may be excluded from consideration if:

- a) The requirements of Sections 742.300 and 742.305 are met;
- b) The corrective action measures have been completed to remove any free product to the maximum extent practicable;
- c) The source of the release is not located within the minimum or designated maximum setback zone or within a regulated recharge area of a potable water supply well;
- d) As demonstrated in accordance with Section 742.1015, for any area within 2500 feet from the source of the release, an ordinance adopted by a unit of local government is in place that effectively prohibits the installation of potable water supply wells (and the use of such wells);
- e) As demonstrated using Equation R26, in Appendix C, Table C, in accordance with Section 742.810, the concentration of any contaminant of concern in groundwater within the minimum or designated maximum setback zone of an

- existing potable water supply well will meet the applicable Tier 1 groundwater remediation objective; and
- f) As demonstrated using Equation R26, in Appendix C, Table C, in accordance with Section 742.810, the concentration of any contaminant of concern in groundwater discharging into a surface water will meet the applicable surface water quality standard under 35 Ill. Adm. Code 302.

SUBPART D: DETERMINING AREA BACKGROUND

Section 742.400 Area Background

This Subpart provides procedures for determining area background concentrations for contaminants of concern. Except as described in Section 742.415(c) and (d) of this Subpart, area background concentrations may be used as remediation objectives for contaminants of concern at a site.

Section 742.405 Determination of Area Background for Soil

- a) Soil sampling results shall be obtained for purposes of determining area background levels in accordance with the following procedures:
 - 1) For volatile organic contaminants, sample results shall be based on discrete samples;
 - 2) Unless an alternative method is approved by the Agency, for contaminants other than volatile organic contaminants, sample results shall be based on discrete samples or composite samples. If a person elects to use composite samples, each 0.5 acre of the area to be sampled shall be divided into quadrants and 5 aliquots of equal volume per quadrant shall be composited into 1 sample;
 - 3) Samples shall be collected from similar depths and soil types, which shall be consistent with the depths and soil types in which maximum levels of contaminants are found in the areas of known or suspected releases; and
 - 4) Samples shall be collected from areas of the site or adjacent to the site that are unaffected by known or suspected releases at or from the site. If the sample results show an impact from releases at or from the site, then the sample results shall not be included in determining area background levels under this Part.

- b) Area background shall be determined according to one of the following approaches:
 - 1) Statewide Area Background Approach:
 - A) The concentrations of inorganic chemicals in background soils listed in Appendix A, Table G may be used as the upper limit of the area background concentration for the site. The first column to the right of the chemical name presents inorganic chemicals in background soils for counties within Metropolitan Statistical Areas. Counties within Metropolitan Statistical Areas are identified in Appendix A, Table G, Footnote a. Sites located in counties outside Metropolitan Statistical Areas shall use the concentrations of inorganic chemicals in background soils shown in the second column to the right of the chemical name.
 - B) Soil area background concentrations determined according to this statewide area background approach shall be used as provided in Section 742.415(b) of this Part. For each parameter whose sampling results demonstrate concentrations above those in Appendix A, Table G, the person shall develop appropriate soil remediation objectives in accordance with this Part, or may determine area background in accordance with subsection (b)(2) of this Section.
 - 2) A statistically valid approach for determining area background concentrations appropriate for the characteristics of the data set, and approved by the Agency.

Section 742.410 Determination of Area Background for Groundwater

- a) Groundwater sampling results shall be obtained for purposes of determining area background in accordance with the following procedures:
 - 1) Samples shall be collected from areas of the site or adjacent to the site that are unaffected by releases at the site;
 - 2) The background monitoring wells shall be sufficient in number to account for the spatial and temporal variability, size, and number of known or suspected off-site releases of contaminants of concern, and the hydrogeological setting of the site;

- 3) The samples shall be collected in consecutive quarters for a minimum of one year for each well unless another sample schedule is approved by the Agency;
- 4) The samples shall be collected from the same stratigraphic unit(s) as the groundwater contamination at the site; and
- 5) The background monitoring wells shall be located hydraulically upgradient from the release(s) of contaminants of concern, unless a person demonstrates to the Agency that the upgradient location is undefinable or infeasible.
- b) Area background shall be determined according to one of the following approaches:
 - 1) Prescriptive Approach:
 - A) If more than 15% of the groundwater sampling results for a chemical obtained in accordance with subsection (a) of this Section are less than the appropriate detection limit for that chemical, the Prescriptive Approach may not be used for that chemical. If 15% or less of the sampling results are less than the appropriate detection limit, a concentration equal to one-half the detection limit shall be used for that chemical in the calculations contained in this Prescriptive Approach.
 - B) The groundwater sampling results obtained in accordance with subsection (a) of this Section shall be used to determine if the sample set is normally distributed. The Shapiro-Wilk Test of Normality shall be used to determine whether the sample set is normally distributed, if the sample set for the background well(s) contains 50 or fewer samples. Values necessary for the Shapiro-Wilk Test of Normality shall be determined using Appendix A, Tables C and D. If the computed value of W is greater than the 5% Critical Value in Appendix A, Table D, the sample set shall be assumed to be normally distributed, and the Prescriptive Approach is allowed. If the computed value of W is less than 5% Critical Value in Appendix A, Table D, the sample set shall be assumed to not be normally distributed, and the Prescriptive Approach shall not be used.
 - C) If the sample set contains at least ten sample results, the Upper Tolerance Limit (UTL) of a normally distributed sample set may be calculated using the mean (x) and standard deviation(s), from:

$$UTL = x + (K \bullet s),$$

where K = the one-sided normal tolerance factor for estimating the 95% upper confidence limit of the 95th percentile of a normal distribution. Values for K shall be determined using Appendix A, Table B.

- D) If the sample set contains at least ten sample results, the UTL shall be the upper limit of the area background concentration for the site. If the sample set contains fewer than ten sample results, the maximum value of the sample set shall be the upper limit of the area background concentration for the site.
- E) This Prescriptive Approach shall not be used for determining area background for the parameter pH.
- 2) Another statistically valid approach for determining area background concentrations appropriate for the characteristics of the data set, and approved by the Agency.

Section 742.415 Use of Area Background Concentrations

- a) A person may request that area background concentrations determined pursuant to Sections 742.405 and 742.410 be used according to the provisions of subsection (b) of this Section. Such request shall address the following:
 - 1) The natural or man-made pathways of any suspected off-site contamination reaching the site;
 - 2) Physical and chemical properties of suspected off-site contaminants of concern reaching the site; and
 - 3) The location and justification of all background sampling points.
- b) Except as specified in subsections (c) and (d) of this Section, an area background concentration may be used as follows:
 - 1) To support a request to exclude a chemical as a contaminant of concern from further consideration for remediation at a site due to its presence as a result of background conditions; or
 - 2) As a remediation objective for a contaminant of concern at a site in lieu of an objective developed pursuant to the other procedures of this Part.

- c) An area background concentration shall not be used IN THE EVENT THAT THE AGENCY HAS DETERMINED IN WRITING THAT THE BACKGROUND LEVEL FOR A REGULATED SUBSTANCE POSES AN ACUTE THREAT TO HUMAN HEALTH OR THE ENVIRONMENT AT THE SITE WHEN CONSIDERING THE POST-REMEDIAL ACTION LAND USE. (Section 58.5(b)(3) of the Act)
- d) IN THE EVENT THAT THE CONCENTRATION OF A REGULATED SUBSTANCE OF CONCERN ON THE SITE EXCEEDS A REMEDIATION OBJECTIVE ADOPTED BY THE BOARD FOR RESIDENTIAL LAND USE, THE PROPERTY MAY NOT BE CONVERTED TO RESIDENTIAL USE UNLESS SUCH REMEDIATION OBJECTIVE OR AN ALTERNATIVE RISK-BASED REMEDIATION OBJECTIVE FOR THAT REGULATED SUBSTANCE OF CONCERN IS FIRST ACHIEVED. If the land use is restricted, there shall be an institutional control in place in accordance with Subpart J. (Section 58.5(b)(2) of the Act)

SUBPART E: TIER 1 EVALUATION

Section 742.500 Tier 1 Evaluation Overview

- a) A Tier 1 evaluation compares the concentration of each contaminant of concern detected at a site to the baseline remediation objectives provided in Appendix B, Tables A, B, C, D and E. Use of Tier 1 remediation objectives requires only limited site-specific information: concentrations of contaminants of concern, groundwater classification, land use classification, and, if appropriate, soil pH. (See Appendix B, Illustration A.)
- b) Although Tier 1 allows for differentiation between residential and industrial/commercial property use of a site, an institutional control under Subpart J is required where remediation objectives are based on an industrial/commercial property use.
- c) Any given exposure route is not a concern if the concentration of each contaminant of concern detected at the site is below the Tier 1 value of that given route. In such a case, no further evaluation of that route is necessary.

Section 742.505 Tier 1 Soil and Groundwater Remediation Objectives

- a) Soil
 - 1) Inhalation Exposure Route

- A) The Tier 1 soil remediation objectives for this exposure route based upon residential property use are listed in Appendix B, Table A.
- B) The Tier 1 soil remediation objectives for this exposure route based upon industrial/commercial property use are listed in Appendix B, Table B. Soil remediation objective determinations relying on this table require use of institutional controls in accordance with Subpart J.

2) Ingestion Exposure Route

- A) The Tier 1 soil remediation objectives for this exposure route based upon residential property use are listed in Appendix B, Table A.
- B) The Tier 1 soil remediation objectives for this exposure route based upon industrial/commercial property use are listed in Appendix B, Table B. Soil remediation objective determinations relying on this table require use of institutional controls in accordance with Subpart J.
- 3) Soil Component of the Groundwater Ingestion Route
 - A) The Tier 1 soil remediation objectives for this exposure route based upon residential property use are listed in Appendix B, Table A.
 - B) The Tier 1 soil remediation objectives for this exposure route based upon industrial/commercial property use are listed in Appendix B, Table B.
 - C) The pH-dependent Tier 1 soil remediation objectives for identified ionizable organics or inorganics for the soil component of the groundwater ingestion exposure route (based on the total amount of contaminants present in the soil sample results and groundwater classification) are provided in Appendix B, Tables C and D.
 - D) Values used to calculate the Tier 1 soil remediation objectives for this exposure route are listed in Appendix B, Table F.
- 4) Evaluation of the dermal contact with soil exposure route is not required under Tier 1.

b) Groundwater

- 1) The Tier 1 groundwater remediation objectives for the groundwater component of the groundwater ingestion route are listed in Appendix B, Table E.
- 2) The Tier 1 groundwater remediation objectives for this exposure route are given for Class I and Class II groundwaters, respectively.
- The Class I groundwater remediation objectives set forth in Appendix B, Table E shall be corrected for cumulative effect of mixtures of similar-acting noncarcinogenic chemicals in accordance with the methodologies set forth in either subsection (b)(3)(A) or (B), if more than one chemical listed in Appendix A, Table E is detected at a site and if such chemicals affect the same target organ (*i.e.*, has the same critical effect as defined by the RfD):
 - A) Calculate the weighted average using the following equations:

Wave =
$$\frac{x_1}{CUO_{x_1}} + \frac{x_2}{CUO_{x_2}} + \frac{x_3}{CUO_{x_3}} + ... + \frac{x_a}{CUO_{x_a}}$$

where:

Wave = Weighted Average

 x_1 through x_2 = Concentration of each individual contaminant at the location of concern. Note that, depending on the target organ/mode of action, the actual number of contaminants will range from 2 to 14.

 $CUO_{x_a} =$ A Tier 1 remediation objective each x_a from Appendix B, Table E.

- ii) If the value of the weighted average calculated in accordance with the equations above is less than or equal to 1.0, then the remediation objectives are met for those chemicals.
- ii) If the value of the weighted average calculated in accordance with the equations above is greater than 1.0, then additional remediation must be carried out until the level of contaminants remaining in the remediated area

have a weighted average calculated in accordance with the equation above less than or equal to one;

B) Divide each individual chemical's remediation objective by the number of chemicals in that specific target organ group that were detected at the site. Each of the contaminant concentrations at the site is then compared to the remediation objectives that have been adjusted to account for this potential additivity.

Section 742.510 Tier 1 Remediation Objectives Tables

- a) Soil remediation objectives are listed in Appendix B, Tables A, B, C and D.
 - 1) Appendix B, Table A is based upon residential property use.
 - A) The first column to the right of the chemical name lists soil remediation objectives for the soil ingestion exposure route.
 - B) The second column lists the soil remediation objectives for the inhalation exposure route.
 - C) The third and fourth columns list soil remediation objectives for the soil component of the groundwater ingestion exposure route for the respective classes of groundwater:
 - i) Class I groundwater; and
 - ii) Class II groundwater.
 - D) The final column lists the Acceptable Detection Limit (ADL), only where applicable.
 - 2) Appendix B, Table B is based upon industrial/commercial property use.
 - A) The first and third columns to the right of the chemical name list the soil remediation objectives for the soil ingestion exposure route based on two receptor populations:
 - i) Industrial/commercial; and
 - ii) Construction worker.

- B) The second and fourth columns to the right of the chemical name list the soil remediation objectives for the inhalation exposure route based on two receptor populations:
 - i) Industrial/commercial; and
 - ii) Construction worker.
- C) The fifth and sixth columns to the right of the chemical name list the soil remediation objectives for the soil component of the groundwater ingestion exposure route for two classes of groundwater:
 - i) Class I groundwater; and
 - ii) Class II groundwater.
- 3) Appendix B, Tables C and D set forth pH specific soil remediation objectives for inorganic and ionizing organic chemicals for the soil component of the groundwater ingestion route.
 - A) Table C sets forth remediation objectives based on Class I groundwater and Table D sets forth remediation objectives based on Class II groundwater.
 - B) The first column in Tables C and D lists the chemical names.
 - C) The second through ninth columns to the right of the chemical names list the pH based soil remediation objectives.
- 4) For the inorganic chemicals listed in Appendix B, Tables A and B, the soil component of the groundwater ingestion exposure route shall be evaluated using TCLP (SW-846 Method 1311) or SPLP (SW-846 Method 1312), incorporated by reference at Section 742.210 unless a person chooses to evaluate the soil component on the basis of the total amount of contaminant in a soil sample result in accordance with subsection (a)(5) of this Section.
- 5) For those inorganic and ionizing organic chemicals listed in Appendix B, Tables C and D, if a person elects to evaluate the soil component of the groundwater ingestion exposure route based on the total amount of contaminant in a soil sample result (rather than TCLP or SPLP analysis), the person shall determine the soil pH at the site and then select the appropriate soil remediation objectives based on Class I and Class II

- groundwaters from Tables C and D, respectively. If the soil pH is less than 4.5 or greater than 8.0, then Tables C and D cannot be used.
- Unless one or more exposure routes are excluded from consideration under Subpart C, the most stringent soil remediation objective of the exposure routes (*i.e.*, soil ingestion exposure route, inhalation exposure route, and soil component of the groundwater ingestion exposure route) shall be compared to the concentrations of soil contaminants of concern measured at the site. When using Appendix B, Table B to select soil remediation objectives for the ingestion exposure route and inhalation exposure route, the remediation objective shall be the more stringent soil remediation objective of the industrial/commercial populations and construction worker populations.
- 7) Confirmation sample results may be averaged or soil samples may be composited in accordance with Section 742.225.
- 8) If a soil remediation objective for a chemical is less than the ADL, the ADL shall serve as the soil remediation objective.
- b) Groundwater remediation objectives for the groundwater component of the groundwater ingestion exposure route are listed in Appendix B, Table E. However, Appendix B, Table E must be corrected for cumulative effect of mixtures of similar-acting noncarcinogenic chemicals as set forth in Section 742.505(b)(3).
 - 1) The first column to the right of the chemical name lists groundwater remediation objectives for Class I groundwater, and the second column lists the groundwater remediation objectives for Class II groundwater.
 - 2) To use Appendix B, Table E of this Part, the 35 Ill. Adm. Code 620 classification for groundwater at the site shall be determined. The concentrations of groundwater contaminants of concern at the site are compared to the applicable Tier 1 groundwater remediation objectives for the groundwater component of the groundwater ingestion exposure route in Appendix B, Table E.
- c) For contaminants of concern not listed in Appendix B, Tables A, B and E, a person may request site-specific remediation objectives from the Agency or propose site-specific remediation objectives in accordance with 35 Ill. Adm. Code 620, Subpart I of this Part, or both.

SUBPART F: TIER 2 GENERAL EVALUATION

Section 742.600 Tier 2 Evaluation Overview

- a) Tier 2 remediation objectives are developed through the use of equations which allow site-specific data to be used. (See Appendix C, Illustrations A and B.) The equations, identified in Appendix C, Tables A and C may be used to develop Tier 2 remediation objectives.
- b) Tier 2 evaluation is only required for contaminants of concern and corresponding exposure routes (except where excluded from further consideration under Subpart C) exceeding the Tier 1 remediation objectives. When conducting Tier 2 evaluations, the values used in the calculations must have the appropriate units of measure as identified in Appendix C, Tables B and D.
- c) Any development of remediation objectives using site-specific information or equations outside the Tier 2 framework shall be evaluated under Tier 3.
- d) Any development of a remediation objective under Tier 2 shall not use a target hazard quotient greater than one at the point of human exposure or a target cancer risk greater than 1 in 1,000,000 at the point of human exposure.
- e) In conducting a Tier 2 evaluation, the following conditions shall be met:
 - 1) For each discrete sample, the total soil contaminant concentration of either a single contaminant or multiple contaminants of concern shall not exceed the attenuation capacity of the soil as provided in Section 742.215.
 - 2) Remediation objectives for noncarcinogenic compounds which affect the same target organ, organ system or similar mode of action shall meet the requirements of Section 742.720.
 - 3) The soil remediation objectives based on the inhalation and the soil component of the groundwater ingestion exposure routes shall not exceed the soil saturation limit as provided in Section 742.220.
- f) If the calculated Tier 2 soil remediation objective for an applicable exposure route is more stringent than the corresponding Tier 1 remediation objective, then the Tier 1 remediation objective applies.

- g) If the calculated Tier 2 soil remediation objective for an exposure route is more stringent than the Tier 1 soil remediation objective(s) for the other exposure routes, then the Tier 2 calculated soil remediation objective applies and Tier 2 soil remediation objectives for the other exposure routes are not required.
- h) If the calculated Tier 2 soil remediation objective is less stringent than one or more of the soil remediation objectives for the remaining exposure routes, then the Tier 2 values are calculated for the remaining exposure route(s) and the most stringent Tier 2 calculated value applies.

Section 742.605 Land Use

- a) Present and post-remediation land use is evaluated in a Tier 2 evaluation. Acceptable exposure factors for the Tier 2 evaluation for residential, industrial/commercial, and construction worker populations are provided in the far right column of both Appendix C, Tables B and D. Use of exposure factors different from those in Appendix C, Tables B and D must be approved by the Agency as part of a Tier 3 evaluation.
- b) If a Tier 2 evaluation is based on an industrial/commercial property use, then:
 - 1) Construction worker populations shall also be evaluated; and
 - 2) Institutional controls are required in accordance with Subpart J.

Section 742.610 Chemical and Site Properties

a) Physical and Chemical Properties of Contaminants

Tier 2 evaluations require information on the physical and chemical properties of the contaminants of concern. The physical and chemical properties used in a Tier 2 evaluation are contained in Appendix C, Table E. If the site has contaminants not included in this table, a person may request the Agency to provide the applicable physical and chemical input values or may propose input values under Subpart I. If a person proposes to apply values other than those in Appendix C, Table E, or those provided by the Agency, the evaluation shall be considered under Tier 3.

- b) Soil and Groundwater Parameters
 - A Tier 2 evaluation requires examination of soil and groundwater parameters. The parameters that may be varied, and the conditions under which these parameters are determined as part of Tier 2, are summarized in Appendix C, Tables B and D. If a person proposes to vary site-specific parameters outside of the framework of these tables, the evaluation shall be considered under Tier 3.
 - 2) To determine site-specific physical soil parameters, a minimum of one boring per 0.5 acre of contamination shall be collected. This boring must be deep enough to allow the collection of the required field measurements. The site-specific physical soil parameters must be determined from the portion of the boring representing the stratigraphic unit(s) being evaluated. For example, if evaluating the soil component of the groundwater ingestion exposure route, two samples from the boring will be required:
 - A) A sample of the predominant soil type for the vadose zone; and
 - B) A sample of the predominant soil type for the saturated zone.
 - A site-specific SSL dilution factor (used in developing soil remediation objectives based upon the protection of groundwater) may be determined by substituting site information in Equation S22 in Appendix C, Table A. To make this demonstration, a minimum of three monitoring wells shall be used to determine the hydraulic gradient. As an alternative, the default dilution factor value listed in Appendix C, Table B may be used. If monitoring wells are used to determine the hydraulic gradient, the soil taken from the borings shall be visually inspected to ensure there are no significant differences in the stratigraphy. If there are similar soil types in the field, one boring shall be used to determine the site-specific physical soil parameters. If there are significant differences, all of the borings shall be evaluated before determining the site-specific physical soil parameters for the site.
 - 4) Not all of the parameters identified in Appendix C, Tables B and D need to be determined on a site-specific basis. A person may choose to collect partial site-specific information and use default values as listed in Appendix C, Tables B and D for the rest of the parameters.

SUBPART G: TIER 2 SOIL EVALUATION

Section 742.700 Tier 2 Soil Evaluation Overview

- a) Tier 2 remediation objectives are developed through the use of models which allow site-specific data to be considered. Appendix C, Tables A and C list equations that shall be used under a Tier 2 evaluation to calculate soil remediation objectives prescribed by SSL and RBCA models, respectively. (See also Appendix C, Illustration A.)
- b) Appendix C, Table A lists equations that are used under the SSL model. (See also Appendix C, Illustration A.) The SSL model has equations to evaluate the following human exposure routes:
 - 1) Soil ingestion exposure route;
 - 2) Inhalation exposure route for:
 - A) Volatiles;
 - B) Fugitive dust; and
 - 3) Soil component of the groundwater ingestion exposure route.
- c) Evaluation of the dermal exposure route is not required under the SSL model.
- d) Appendix C, Table C lists equations that are used under the RBCA model. (See also Appendix C, Illustration A.) The RBCA model has equations to evaluate human exposure based on the following:
 - 1) The combined exposure routes of inhalation of vapors and particulates, soil ingestion and dermal contact with soil;
 - 2) The ambient vapor inhalation (outdoor) route from subsurface soils;
 - 3) Soil component of the groundwater ingestion route; and
 - 4) Groundwater ingestion exposure route.
- e) The equations in either Appendix C, Table A or C may be used to calculate remediation objectives for each contaminant of concern under Tier 2, if the following requirements are met:

- 1) The Tier 2 soil remediation objectives for the ingestion and inhalation exposure routes shall use the applicable equations from the same approach (i.e., SSL equations in Appendix C, Table C).
- 2) The equations used to calculate soil remediation objectives for the soil component of the groundwater ingestion exposure route are not dependent on the approach utilized to calculate soil remediation objectives for the other exposure routes. For example, it is acceptable to use the SSL equations for calculating Tier 2 soil remediation objectives for the ingestion and inhalation exposure routes, and the RBCA equations for calculating Tier 2 soil remediation objectives for the soil component of the groundwater ingestion exposure route.
- 3) Combining equations from Appendix C, Tables A and C to form a new model is not allowed. In addition, Appendix C, Tables A and C must use their own applicable parameters identified in Appendix C, Tables B and D, respectively.
- f) In calculating soil remediation objectives for industrial/commercial property use, applicable calculations shall be performed twice: once using industrial/commercial population default values and once using construction worker population default values. The more stringent soil remediation objectives derived from these calculations must be used for further Tier 2 evaluations.
- g) Tier 2 data sheets provided by the Agency shall be used to present calculated Tier 2 remediation objectives, if required by the particular program for which remediation is being performed.
- h) The RBCA equations which rely on the parameter Soil Water Sorption Coefficient (k_s) can only be used for ionizing organics and inorganics by substituting values for k_s from Appendix C, Tables I and J, respectively. This will also require the determination of a site-specific value for soil pH.

Section 742.705 Parameters for Soil Remediation Objective Equations

a) Appendix C, Tables B and D list the input parameters for the SSL and RBCA equations, respectively. The first column lists each symbol as it is presented in the equation. The next column defines the parameters. The third column shows the units for the parameters. The fourth column identifies where information on the parameters can be obtained (i.e., field measurement, applicable equation(s), reference source, or default value). The last column identifies how the parameters can be generated.

b) Default Values

Default values are numerical values specified for use in the Tier 2 equations. The fourth column of Appendix C, Tables B and D denotes if the default values are from the SSL model, RBCA model, or some other source. The last column of Appendix C, Tables B and D lists the numerical values for the default values used in the SSL and RBCA equations, respectively.

c) Site-specific Information

Site-specific information is a parameter measured, obtained, or determined from the site to calculate Tier 2 remediation objectives. The fourth column of Appendix C, Tables B and D identifies those site-specific parameters that may require direct field measurement. For some parameters, numerical default inputs have been provided in the last column of Appendix C, Tables B and D to substitute for site-specific information. In some cases, information on the receptor or soil type is required to select the applicable numerical default inputs. Site-specific information includes:

- Physical soil parameters identified in Appendix C, Table F. The second column identifies the location where the sample is to be collected.
 Acceptable methods for measuring or calculating these soil parameters are identified in the last column of Appendix C, Table F;
- 2) Institutional controls or engineered barriers, pursuant to Subparts J and K, describe applicable institutional controls and engineered barriers under a Tier 2 evaluation; and
- 3) Land use classification
- d) Toxicological-specific Information
 - 1) Toxicological-specific information is used to calculate Tier 2 remediation objectives for the following parameters, if applicable:
 - A) Oral Chronic Reference Dose (RfD₀, expressed in mg/kg-d);
 - B) Oral Subchronic Reference Dose (RfD_s, expressed in mg/kg-d, shall be used for construction worker remediation objective calculations);
 - C) Oral Slope Factor (SF₀, expressed in (mg/kg-d)⁻¹);
 - D) Inhalation Unit Risk Factor (URF expressed in (μg/m³)-¹);

- E) Inhalation Chronic Reference Concentration (RfC, expressed in mg/m³);
- F) Inhalation Subchronic Reference Concentration (RfC_s, expressed in mg/m³, shall be used for construction worker remediation objective calculations);
- G) Inhalation Chronic Reference Dose (RfDi, expressed in mg/kg-d);
- H) Inhalation Subchronic Reference Dose (RfD_{is}, expressed in mg/kg-d, shall be used for construction worker remediation objective calculations); and
- I) Inhalation Slope Factor (SF_i, expressed in (mg/kg-d)⁻¹);
- 2) Toxicological information can be obtained from IRIS, as incorporated by reference in Section 742.210, or the program under which the remediation is being performed.
- e) Chemical-specific Information

Chemical-specific information used to calculate Tier 2 remediation objectives is listed in Appendix C, Table E.

f) Calculations

Calculating numerical values for some parameters requires the use of equations listed in Appendix C, Table A or C. The parameters that are calculated are listed in Appendix C, Tables B and D.

Section 742.710 SSL Soil Equations

a) This Section sets forth the equations and parameters used to develop Tier 2 soil remediation objectives for the three exposure routes using the SSL approach.

b) Soil Ingestion Exposure Route

- 1) Equations S1 through S3 form the basis for calculating Tier 2 remediation objectives for the soil ingestion exposure route using the SSL approach. Equation S1 is used to calculate soil remediation objectives for noncarcinogenic contaminants. Equations S2 and S3 are used to calculate soil remediation objectives for carcinogenic contaminants for residential populations and industrial/commercial and construction worker populations, respectively.
- 2) For Equations S1 through S3, the SSL default values cannot be modified with site-specific information.

c) Inhalation Exposure Route

Equations S4 through S16, S26 and S27 are used to calculate Tier 2 soil remediation objectives for the inhalation exposure route using the SSL approach. To address this exposure route, volatiles must be evaluated separately from fugitive dust using their own equations set forth in subsections (c)(2) and (c)(3) of this Section, respectively.

2) Volatiles

- A) Equations S4 through S10 are used to calculate Tier 2 soil remediation objectives for volatile contaminants based on the inhalation exposure route. Equation S4 is used to calculate soil remediation objectives for noncarcinogenic volatile contaminants in soil for residential and industrial/commercial populations. Equation S5 is used to calculate soil remediation objectives for noncarcinogenic volatile contaminants in soil for construction worker populations. Equation S6 is used to calculate soil remediation objectives for carcinogenic volatile contaminants in soil for residential and industrial/commercial populations. Equation S7 is used to calculate soil remediation objectives for carcinogenic volatile contaminants in soil for construction worker populations. Equations S8 through S10, S27 and S28 are used for calculating numerical values for some of the parameters in Equations S4 through S7.
- B) For Equation S4, a numerical value for the Volatilization Factor (VF) can be calculated in accordance with subsection (c)(2)(F) of this Section. The remaining parameters in Equation S4 have either SSL default values listed in Appendix C, Table B or

- toxicological-specific information (i.e., RfC), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- C) For Equation S5, a numerical value for the Volatilization Factor adjusted for Agitation (VF') can be calculated in accordance with subsection (c)(2)(G) of this Section. The remaining parameters in Equation S5 have either SSL default values listed in Appendix C, Table B or toxicological-specific information (i.e., RfC), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- D) For Equation S6, a numerical value for VF can be calculated in accordance with subsection (c)(2)(F) of this Section. The remaining parameters in Equation S6 have either default values listed in Appendix C, Table B or toxicological-specific information (i.e., URF), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- E) For Equation S7, a numerical value for VF' can be calculated in accordance with subsection (c)(2)(G) of this Section. The remaining parameters in Equation S7 have either default values listed in Appendix C, Table B or toxicological-specific information (i.e., URF), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- F) The VF can be calculated for residential and industrial/commercial populations using one of the following equations based on the information known about the contaminant source and receptor population:
 - i) Equation S8, in conjunction with Equation S10, is used to calculate VF assuming an infinite source of contamination; or
 - ii) If the area and depth of the contaminant source are known or can be estimated reliably, mass limit considerations may be used to calculate VF using Equation S26.
- G) The VF' can be calculated for the construction worker populations using one of the following equations based on the information known about the contaminant source:

- i) Equation S9 is used to calculate VF' assuming an infinite source of contamination; or
- ii) If the area and depth of the contaminant source are known or can be estimated reliably, mass limit considerations may be used to calculate VF' using Equation S27.

3) Fugitive Dust

- A) Equations S11 through S16 are used to calculate Tier 2 soil remediation objectives using the SSL fugitive dust model for the inhalation exposure route. Equation S11 is used to calculate soil remediation objectives for noncarcinogenic contaminants in fugitive dust for residential and industrial/commercial populations. Equation S12 is used to calculate soil remediation objectives for noncarcinogenic contaminants in fugitive dust for construction worker populations. Equation S13 is used to calculate soil remediation objectives for carcinogenic contaminants in fugitive dust for residential and industrial/commercial populations. Equation S14 is used to calculate soil remediation objectives for carcinogenic contaminants in fugitive dust for construction worker populations. Equations S15 and S16 are used for calculating numerical quantities for some of the parameters in Equations S11 through S14.
- B) For Equation S11, a numerical value can be calculated for the Particulate Emission Factor (PEF) using Equation S15. This equation relies on various input parameters from a variety of sources. The remaining parameters in Equation S11 have either SSL default values listed in Appendix C, Table B or toxicological-specific information (i.e., RfC), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- C) For Equation S12, a numerical value for the Particulate Emission Factor for Construction Worker (PEF') can be calculated using Equation S16. The remaining parameters in Equation S12 have either SSL default values listed in Appendix C, Table B or toxicological-specific information (i.e., RfC), which can be obtained from IRIS or requested from the program under which the remediation is being performed.

- D) For Equation S13, a numerical value for PEF can be calculated using Equation S15. The remaining parameters in Equation S13 have either default values listed in Appendix C, Table B or toxicological-specific information (i.e., URF), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- E) For Equation S14, a numerical value for PEF' can be calculated using Equation S16. The remaining parameters in Equation S14 have either default values listed in Appendix C, Table B or toxicological-specific information (i.e., URF), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- d) Soil Component of the Groundwater Ingestion Exposure Route

The Tier 2 remediation objective for the soil component of the groundwater ingestion exposure route can be calculated using one of the following equations based on the information known about the contaminant source and receptor population:

- 1) Equation S17 is used to calculate the remediation objective assuming an infinite source of contamination.
 - A) The numerical quantities for four parameters in Equation S17, the Target Soil Leachate Concentration (C_w), Soil-Water Partition Coefficient (K_d) for non-ionizing organics, Water-Filled Soil Porosity (θ_w) and Air-Filled Soil Porosity (θ_a), are calculated using Equations S18, S19, S20 and S21, respectively. Equations S22, S23, S24 and S25 are also needed to calculate numerical values for Equations S18 and S21. The pH-dependent K_d values for ionizing organics can be calculated using Equation S19 and the pH-dependent K_{oc} values in Appendix C, Table I.
 - B) The remaining parameters in Equation S17 are Henry's Law Constant (H'), a chemical specific value listed in Appendix C, Table E and Dry Soil Bulk Density (ρ_b), a site-specific based value listed in Appendix C, Table B.
 - C) The default value for GW_{obj} is the Tier 1 groundwater objective. For chemicals for which there is no Tier 1 groundwater remediation objective, the value for GW_{obj} shall be the Health Advisory concentration determined according to the procedures specified in 35 Ill. Adm. Code 620, Subpart F. As an alternative

to using Tier 1 groundwater remediation objectives or Health Advisory concentrations, GW_{obj} may be developed using Equations R25 and R26, if approved institutional controls are in place as required in Subpart J

2) If the area and depth of the contaminant source are known or can be estimated reliably, mass limit considerations may be used to calculate the remediation objective for this exposure route using Equation S28. The parameters in Equation S28 have default values listed in Appendix C, Table B.

Section 742.715 RBCA Soil Equations

- a) This Section presents the RBCA model and describes the equations and parameters used to develop Tier 2 soil remediation objectives.
- b) Ingestion, Inhalation, and Dermal Contact
 - The two sets of equations in subsections (b)(2) and (b)(3) of this Section shall be used to generate Tier 2 soil remediation objectives for the combined ingestion, inhalation, and dermal contact with soil exposure routes.
 - 2) Combined Exposure Routes of Soil Ingestion, Inhalation of Vapors and Particulates, and Dermal Contact with Soil
 - A) Equations R1 and R2 form the basis for deriving Tier 2 remediation objectives for the set of equations that evaluates the combined exposure routes of soil ingestion, inhalation of vapors and particulates, and dermal contact with soil using the RBCA approach. Equation R1 is used to calculate soil remediation objectives for carcinogenic contaminants. Equation R2 is used to calculate soil remediation objectives for noncarcinogenic contaminants. Soil remediation objectives for the ambient vapor inhalation (outdoor) route from subsurface soils must also be calculated in accordance with the procedures outlined in subsection (b)(3) of this Section and compared to the values generated from Equations R1 or R2. The smaller value (i.e., R1 and R2 compared to R7 and R8, respectively) from these calculations is the Tier 2 soil remediation objective for the combined exposure routes of soil ingestion, inhalation, and dermal contact with soil.

- B) In Equation R1, numerical values are calculated for two parameters:
 - i) The volatilization factor for surficial soils (VF_{ss}) using Equations R3 and R4; and
 - ii) The volatilization factor for subsurface soils regarding particulates (VF_p) using Equation R5.
- C) VF_{ss} uses Equations R3 and R4 to derive a numerical value. Equation R3 requires the use of Equation R6. Both equations must be used to calculate the VF_{ss}. The lowest calculated value from these equations must be substituted into Equation R1.
- D) The remaining parameters in Equation R1 have either default values listed in Appendix C, Table D or toxicological-specific information (i.e., SF₀, SF_i), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- E) For Equation R2, the parameters VF_{ss} and VF_p are calculated. The remaining parameters in Equation R2 have either default values listed in Appendix C, Table D or toxicological-specific information (i.e., RfD_o, RfD_i), which can be obtained from IRIS or requested from the program under which the remediation is being performed.
- F) For chemicals other than inorganics which do not have default values for the dermal absorption factor (RAF_d) in Appendix C, Table D, a dermal absorption factor of 0.5 shall be used for Equations R1 and R2. For inorganics, dermal absorption may be disregarded (i.e., $RAF_d = 0$).
- 3) Ambient Vapor Inhalation (outdoor) route from Subsurface Soils (soil below one meter)
 - A) Equations R7 and R8 form the basis for deriving Tier 2 remediation objectives for the ambient vapor inhalation (outdoor) route from subsurface soils using the RBCA approach. Equation R7 is used to calculate soil remediation objectives for carcinogenic contaminants. Equation R8 is used to calculate soil remediation objectives for noncarcinogenic contaminants.

- B) For Equation R7, the carcinogenic risk-based screening level for air (RBSLair) and the volatilization factor for soils below one meter to ambient air (VF_{samb}) have numerical values that are calculated using Equations R9 and R11, respectively. Both equations rely on input parameters from a variety of sources.
- C) The noncarcinogenic risk-based screening level for air (RBSLair) and the volatilization factor for soils below one meter to ambient air (VF_{samb}) in Equation R8 have numerical values that can be calculated using Equations R10 and R11, respectively.
- c) Soil Component of the Groundwater Ingestion Exposure Route
 - Equation R12 forms the basis for deriving Tier 2 remediation objectives for the soil component of the groundwater ingestion exposure route using the RBCA approach. The parameters, groundwater at the source (GW_{source}), and Leaching Factor (LF_{sw}), have numerical values that are calculated using Equations R13 and R14, respectively.
 - 2) Equation R13 requires numerical values that are calculated using Equation R15.
 - Equation R14 requires numerical values that are calculated using Equations R21, R22, and R24. For non-ionizing organics, the Soil Water Sorption Coefficient (ks) shall be calculated using Equation R20. For ionizing organics and inorganics, the values for ks are listed in Appendix C, Tables I and J, respectively. The pH-dependent ks values for ionizing organics can be calculated using Equation R20 and the pH-dependent Koc values in Appendix C, Table I. The remaining parameters in Equation R14 are field measurements or default values listed in Appendix C, Table D.
- d) The default value for GW_{comp} is the Tier 1 groundwater remediation objective. For chemicals for which there is no Tier 1 groundwater remediation objective, the value for GW_{comp} shall be the Health Advisory concentration determined according to the procedures specified in 35 Ill. Adm. Code 620, Subpart F. As an alternative to using the Tier 1 groundwater remediation objectives or Health Advisory concentrations, GW_{comp} may be developed using Equations R25 and R26, if approved institutional controls are in place as may be required in Subpart J.

Appendix A, Table E lists the groups of chemicals from Appendix B, Tables A and B that have remediation objectives based on noncarcinogenic toxicity and that affect the same target organ. If more than one chemical detected at a site affects the same target organ (i.e., has the same critical effect as defined by the RfD), the initially calculated remediation value for each chemical in the group shall be corrected for cumulative effects by one of the following two methods:

a) Calculate the weighted average using the following equations:

Wave =
$$\frac{x_1}{CUO_{x_1}} + \frac{x_2}{CUO_{x_2}} + \frac{x_3}{CUO_{x_3}} + ... + \frac{x_a}{CUO_{x_a}}$$

where:

Wave = Weighted Average

 x_1 through x_2 = Concentration of each individual contaminant at the location of concern. Note that, depending on the target organ/mode of action, the actual number of contaminants will range from 2 to 14.

 $CUO_{x_a} =$ A Tier 2 remediation objective must be developed for each x_a .

If the value of the weighted average calculated in accordance with the equations above is less than or equal to 1.0, then the remediation objectives are met for those chemicals.

If the value of the weighted average calculated in accordance with the equations above is greater than 1.0, then additional remediation must be carried out until the level of contaminants remaining in the remediated area has a weighted average calculated in accordance with the equation above less than or equal to one.

b) Divide each individual chemical's remediation objective by the number of chemicals in that specific target organ group that were detected at the site. Each of the contaminant concentrations at the site is then compared to the remediation objectives that have been adjusted to account for this potential additivity. For the noncarcinogenic contaminants listed in Appendix A, Table E, a respective soil remediation objective need be no lower than the respective value listed in Appendix B, Table A or B.

SUBPART H: TIER 2 GROUNDWATER EVALUATION

Section 742.800 Tier 2 Groundwater Evaluation Overview

If the contaminant concentrations in the groundwater exceed the applicable Tier 1 remediation objectives, a person has the following options:

- a) Demonstrate that the groundwater ingestion exposure route is excluded from consideration pursuant to Subpart C;
- b) Demonstrate that the groundwater contamination is at or below area background concentrations in accordance with Subpart D and, if necessary, an institutional control restricting usage of the groundwater is in place in accordance with Subpart J;
- c) Remediate to Tier 1 remediation objectives;
- d) Propose and obtain approval of Tier 2 groundwater remediation objectives in accordance with Section 742.805 and remediate to that level, if necessary;
- e) Conduct a Tier 3 evaluation in accordance with Subpart I; or
- f) Obtain approval from the Board to:
 - 1) Reclassify the groundwater pursuant to 35 Ill. Adm. Code 620.260; or
 - 2) Use an adjusted standard pursuant to Section 28.1 of the Act. [415 ILCS 5/28.1].

Section 742.805 Tier 2 Groundwater Remediation Objectives

- a) To develop a groundwater remediation objective under this Section that exceeds the applicable Tier 1 groundwater remediation objective, a person may request approval from the Agency if the person has performed the following:
 - 1) Identified the horizontal and vertical extent of groundwater for which the Tier 2 groundwater remediation objective is sought;
 - 2) Taken corrective action, to the maximum extent practicable to remove any free product;
 - 3) Using Equation R26 in accordance with Section 742.810, demonstrated that the concentration of any contaminant of concern in groundwater will meet:

- A) The applicable Tier 1 groundwater remediation objective at the point of human exposure; or
- B) For any contaminant of concern for which there is no Tier 1 groundwater remediation objective, the Health Advisory concentration determined according to the procedures specified in 35 Ill. Adm. Code 620, Subpart F at the point of human exposure. A person may request the Agency to provide these concentrations or may propose these concentrations under Subpart I;
- 4) Using Equation R26 in accordance with Section 742.810, demonstrated that the concentration of any contaminant of concern in groundwater within the minimum or designated maximum setback zone of an existing potable water supply well will meet the applicable Tier 1 groundwater remediation objective or if there is no Tier 1 groundwater remediation objective, the Health Advisory concentration;
- 5) Using Equation R26 in accordance with Section 742.810, demonstrated that the concentration of any contaminant of concern in groundwater discharging into a surface water will meet the applicable water quality standard under 35 Ill. Adm. Code 302;
- 6) Demonstrated that the source of the release is not located within the minimum or designated maximum setback zone or within a regulated recharge area of an existing potable water supply well; and
- 7) If the selected corrective action includes an engineered barrier as set forth in Subpart K to minimize migration of contaminant of concern from the soil to the groundwater, demonstrated that the engineered barrier will remain in place for post-remediation land use through an institutional control as set forth in Subpart J.
- b) A groundwater remediation objective that exceeds the water solubility of that chemical (refer to Appendix C, Table E for solubility values) is not allowed.
- c) Groundwater remediation objectives for chemicals which affect the same target organ, organ system or similar mode of action shall meet the requirements of Section 742.505(b)(3). Contaminants of concern for which a Tier 1 remediation objective has been developed shall be included in any mixture of similar-acting substances under consideration in Tier 2.

Section 742.810 Calculations to Predict Impacts from Remaining Groundwater Contamination

- a) Equation R26 predicts the contaminant concentration along the centerline of a plume emanating from a vertical planar source in the aquifer (dimensions S_w wide and S_d deep). This model accounts for both three-dimensional dispersion (x is the direction of groundwater flow, y is the other horizontal direction, and z is the vertical direction) and biodegradation.
 - 1) The parameters in this equation are:
 - X = distance from the planar source to the location of concern, along the centerline of the plume (i.e., y=0, z=0)
 - $C_x =$ the concentration of the contaminant at a distance X from the source, along the centerline of the plume
 - C_{source} = the greatest potential concentration of the contaminant of concern in the groundwater at the source of the contamination, based on the concentrations of contaminants in groundwater due to the release and the projected concentration of the contaminant migrating from the soil to the groundwater. As indicated above, the model assumes a planar source discharging groundwater at a concentration equal to C_{source}
 - $\alpha_x =$ dispersivity in the x direction (i.e., Equation R16)
 - $\alpha_y =$ dispersivity in the y direction (i.e., Equation R17)
 - $\alpha_z =$ dispersivity in the z direction (i.e., Equation R18)
 - U = specific discharge (i.e., actual groundwater flow velocity through a porous medium; takes into account the fact that the groundwater actually flows only through the pores of the subsurface materials) where the aquifer hydraulic conductivity (K), the hydraulic gradient (I) and the total soil porosity (θ_T) must be known (i.e., Equation R19)
 - $\lambda =$ first order degradation constant obtained from Appendix C, Table E or from measured groundwater data

- $S_w =$ width of planar source in the y direction
- S_d = depth of planar source in the z direction
- The following parameters are determined through field measurements: $U, K, I, \theta_T, S_w, S_d$.
 - A) The determination of values for U, K, I and θ_T can be obtained through the appropriate laboratory and field techniques;
 - B) From the immediate down-gradient edge of the source of the groundwater contamination values for S_w and S_d shall be determined. S_w is defined as the width of groundwater at the source which exceeds the Tier 1 groundwater remediation objective. S_d is defined as the depth of groundwater at the source which exceeds the Tier 1 groundwater remediation objective; and
 - C) Total soil porosity can also be calculated using Equation R23.
- of this Section, the contaminant concentration along the centerline of the plume at a distance X from the source shall be calculated such that that distance from the down-gradient edge of the source of the contamination at the site to the point where the contaminant concentration is equal to the Tier 1 groundwater remediation objective or Health Advisory concentration.
 - 1) If there are any potable water supply wells located within the calculated distance X, then the Tier 1 groundwater remediation objective or Health Advisory concentration shall be met at the edge of the minimum or designated maximum setback zone of the nearest potable water supply well down-gradient of the source. If no potable water supply wells exist within the calculated distance X, then it can be determined that no existing potable water supply wells are adversely impacted.
 - 2) To demonstrate that no surface water is adversely impacted, X shall be the distance from the down-gradient edge of the source of the contamination at the site to the nearest surface water body. This calculation must show that the contaminant in the groundwater at this location (C_x) does not exceed the applicable water quality standard.

Section 742.900 Tier 3 Evaluation Overview

- a) Tier 3 sets forth a flexible framework to develop remediation objectives outside of the requirements of Tiers 1 and 2. Although Tier 1 and Tier 2 evaluations are not prerequisites to conduct Tier 3 evaluations, data from Tier 1 and Tier 2 can assist in developing remediation objectives under a Tier 3 evaluation.
- b) The level of detail required to adequately characterize a site depends on the particular use of Tier 3. Tier 3 can require additional investigative efforts beyond those described in Tier 2 to characterize the physical setting of the site. However, in situations where remedial efforts have simply reached a physical obstruction additional investigation may not be necessary for a Tier 3 submittal.
- c) Situations that can be considered for a Tier 3 evaluation include, but are not limited to:
 - 1) Modification of parameters not allowed under Tier 2;
 - 2) Use of models different from those used in Tier 2;
 - 3) Use of additional site data to improve or confirm predictions of exposed receptors to contaminants of concern;
 - Analysis of site-specific risks using formal risk assessment, probabilistic data analysis, and sophisticated fate and transport models (e.g., requesting a target hazard quotient greater than 1 or a target cancer risk greater than 1 in 1,000,000);
 - 5) Requests for site-specific remediation objectives because an assessment indicates further remediation is not practical;
 - 6) Incomplete human exposure pathway(s) not excluded under Subpart C;
 - 7) Use of toxicological-specific information not available from the sources listed in Tier 2;
 - 8) Land uses which are substantially different from the assumed residential or industrial/commercial property uses of a site (e.g., a s site will be used for recreation in the future and cannot be evaluated in Tiers 1 or 2); and

- 9) Requests for site-specific remediation objectives which exceed Tier 1 groundwater remediation objectives so long as the following is demonstrated:
 - A) TO THE EXTENT PRACTICAL, THE EXCEEDANCE OF THE GROUNDWATER QUALITY STANDARD HAS BEEN MINIMIZED AND BENEFICIAL USE APPROPRIATE TO THE GROUNDWATER THAT WAS IMPACTED HAS BEEN RETURNED; AND
 - B) ANY THREAT TO HUMAN HEALTH OR THE ENVIRONMENT HAS BEEN MINIMIZED. (Section 58.5(D)(4)(A) of the Act)
- d) For requests of a target cancer risk ranging between 1 in 1,000,000 and 1 in 10,000 at the point of human exposure or a target hazard quotient greater than 1 at the point of human exposure, the requirements of Section 742.915 shall be followed. Requests for a target cancer risk exceeding 1 in 10,000 at the point of human exposure are not allowed.
- e) Requests for approval of a Tier 3 evaluation must be submitted to the Agency for review under the specific program under which remediation is performed. When reviewing a submittal under Tier 3, the Agency shall consider WHETHER THE INTERPRETATIONS AND CONCLUSIONS REACHED ARE SUPPORTED BY THE INFORMATION GATHERED. (Section 58.7(e)(1) of the Act) The Agency shall approve a Tier 3 evaluation if the person submits the information required under this Part and establishes through such information that public health is protected and that specified risks to human health and the environment have been minimized.

Section 742.905 Modifications of Parameters

Any proposed changes to Tier 2 parameters which are not provided for in Tier 2 shall be submitted to the Agency for review and approval. A submittal under this Section shall include the following information:

- a) The justification for the modification; and
- b) The technical and mathematical basis for the modification.

Section 742.910 Alternative Models

Any proposals for the use of models other than those specified in Tier 2 shall be submitted to the Agency for review and approval. A submittal under this Section shall include the following information:

- a) Physical and chemical properties of contaminants of concern;
- b) Contaminant movement properties;
- c) Contaminant availability to receptors;
- d) Receptor exposure to the contaminants of concern;
- e) Mathematical and technical justification for the model proposed;
- f) A licensed copy of the model, if the Agency does not have a licensed copy of the model currently available for use; and
- g) Demonstration that the models were correctly applied.

Section 742.915 Formal Risk Assessments

A comprehensive site-specific risk assessment shall demonstrate that contaminants of concern at a site do not pose a significant risk to any human receptor. All site-specific risk assessments shall be submitted to the Agency for review and approval. A submittal under this Section shall address the following factors:

- a) Whether the risk assessment procedure used is nationally recognized and accepted including, but not limited to, those procedures incorporated by reference in Section 742.210;
- b) Whether the site-specific data reflects actual site conditions;
- c) The adequacy of the investigation of present and post-remediation exposure routes and risks to receptors identified at the site;
- d) The appropriateness of the sampling and analysis;
- e) The adequacy and appropriateness of toxicity information;
- f) The extent of contamination;
- g) Whether the calculations were accurately performed; and
- h) Proposals seeking to modify the target risk consistent with Section 742.900(d) shall address the following factors:

- 1) the presence of sensitive populations;
- 2) the number of receptors potentially impacted;
- 3) the duration of risk at the differing target levels; and
- 4) the characteristics of the chemical of concern.

Section 742.920 Impractical Remediation

Any request for site-specific remediation objectives due to impracticality of remediation shall be submitted to the Agency for review and approval. A submittal under this Section shall include the following information:

- a) The reason(s) why the remediation is impractical;
- b) The extent of contamination;
- c) Geology, including soil types;
- d) The potential impact to groundwater;
- e) Results and locations of sampling events;
- f) Map of the area, including all utilities and structures; and
- g) Present and post-remediation uses of the area of contamination, including human receptors at risk.

Section 742.925 Exposure Routes

Technical information may demonstrate that there is no actual or potential impact of contaminants of concern to receptors from a particular exposure route. In these instances, a demonstration excluding an exposure route shall be submitted to the Agency for review and approval. A submittal under this Section shall include the following information:

- a) A description of the route evaluated;
- b) Technical support including a discussion of the natural or man-made barriers to exposure through that route, calculations, and modeling results;
- c) Physical and chemical properties of contaminants of concern;
- d) Contaminant migration properties;

- e) Description of the site and physical site characteristics; and
- f) Discussion of the result and possibility of the route becoming active in the future.

Section 742.930 Derivation of Toxicological Data

If toxicological-specific information is not available for one or more contaminants of concern from the sources incorporated by reference in Section 742.210, the derivations of toxicological-specific information shall be submitted for Agency review and approval.

SUBPART J: INSTITUTIONAL CONTROLS

Section 742.1000 Institutional Controls

- a) Institutional controls in accordance with this Subpart must be placed on the property when remediation objectives are based on any of the following assumptions:
 - 1) Industrial/Commercial property use;
 - 2) Target cancer risk greater than 1 in 1,000,000;
 - 3) Target hazard quotient greater than 1;
 - 4) Engineered barrier(s);
 - 5) The point of human exposure is located at a place other than at the source;
 - 6) Exclusion of exposure routes under Subpart C; or
 - 7) Any combination of the above.
- b) The Agency shall not approve any remediation objective under this Part that is based on the use of institutional controls unless the person has proposed institutional controls meeting the requirements of this Subpart and the requirements of the specific program under which the institutional control is proposed. A proposal for approval of institutional controls shall provide identification of the selected institutional controls from among the types recognized in this Subpart.

- c) The following instruments may be institutional controls, subject to the requirements of this Subpart J and the requirements of the specific program under which the institutional control is proposed:
 - 1) No Further Remediation Letters;
 - 2) Restrictive covenants and deed restrictions:
 - 3) Negative easements;
 - 4) Ordinances adopted and administered by a unit of local government; and
 - 5) Agreements between a property owner and a highway authority with respect to any contamination remaining under highways.
- d) An institutional control is transferred with the property.

Section 742.1005 No Further Remediation Letters

- a) A No Further Remediation Letter issued by the Agency under 35 Ill. Adm. Code 732 or 742 may be used as an institutional control under this Part if the requirements of subsection (b) of this Section are met.
- b) A request for approval of a No Further Remediation Letter as an institutional control shall meet the requirements applicable to the specific program under which the remediation is performed.

Section 742.1010 Restrictive Covenants, Deed Restrictions and Negative Easements

- a) A restrictive covenant, deed restriction or negative easement may be used as an institutional control under this Part if the requirements of this Section are met and the Agency has determined that no further remediation is required as to the property(ies) to which the institutional control is to apply.
- b) A request for approval of a restrictive covenant, deed restriction or negative easement as an acceptable institutional control shall provide the following:
 - 1) A copy of the restrictive covenant, deed restriction, or negative easement in the form it will be recorded with the Office of the Recorder or Registrar of Titles in the county where the site is located;
 - 2) A scaled map showing the horizontal extent of contamination above the applicable remediation objectives;

- 3) Information showing the concentration of contaminants of concern in which the applicable remediation objectives are exceeded;
- 4) A scaled map showing the legal boundaries of all properties under which contamination is located that exceeds the applicable remediation objectives and which are subject to the restrictive covenant, deed restriction, or negative;
- 5) Information identifying the current owner(s) of each property identified in subsection (b)(4) of this Section; and
- Authorization by the current owner(s), or person authorized by law to act on behalf of the owner, of each property identified in subsection (b)(5) of this Section to record the restrictive covenant or deed restriction.
- Any restrictive covenant, deed restriction, or negative easement approved by the Agency pursuant to this Section shall be recorded in the Office of the Recorder or Registrar of Titles of the county in which the site is located together with the instrument memorializing the Agency's no further remediation determination pursuant to the specific program within 45 days after receipt of the Agency's no further remediation determination.
- d) An institutional control approved under this Section shall not become effective until officially recorded in accordance with subsection (c) of this Section. The person receiving the approval shall obtain and submit to the Agency within 30 days after recording a copy of the institutional control demonstrating that it has been recorded.
- e) At no time shall any site for which land use has been restricted under an institutional control approved under this Section be used in a manner inconsistent with such land use limitation unless further investigation or remedial action has been conducted that documents the attainment of remediation objectives appropriate for such land use and a new institutional control, if necessary, is approved and recorded in accordance with subsection (c) of this Section.
- f) Violation of the terms of an institutional control approved under this Section shall be grounds for voidance of the institutional control and the instrument memorializing the Agency's no further remediation determination.

Section 742.1015 Ordinances

- An ordinance adopted by a unit of local government that effectively prohibits the installation of potable water supply wells (and the use of such wells) may be used as an institutional control to meet the requirements of Section 742.320(d) or 742.805(a)(3) if the requirements of this Section are met. Ordinances prohibiting the installation of potable water supply wells (and the use of such wells) that do not expressly prohibit the installation of potable water supply wells (and the use of such wells) by units of local government may be acceptable as institutional controls if the requirements of this Section are met and a Memorandum of Understanding (MOU) is entered into under subsection (i) of this Section.
- b) A request for approval of a local ordinance as an institutional control shall provide the following:
 - A copy of the ordinance restricting groundwater use certified by an official of the unit of local government in which the site is located that it is the latest, most current copy of the ordinance, unless the Agency and the unit of local government have entered an agreement under subsection (i) of this Section, in which case the request may alternatively reference the MOU. The ordinance must demonstrate that potable use of groundwater from potable water supply wells is prohibited;
 - 2) A scaled map(s) delineating the areal extent of groundwater contamination (measured or modeled) above the applicable remediation objectives;
 - 3) Information showing the concentration of contaminants of concern in which the applicable remediation objectives are exceeded;
 - 4) A scaled map delineating the boundaries of all properties under which groundwater is located which exceeds the applicable groundwater remediation objectives;
 - 5) Information identifying the current owner(s) of each property identified in subsection (b)(4) of this Section; and
 - A copy of the proposed submission of the information to the current owners identified in subsection (b)(5) of this Section of the information required in subsections (b)(1) through (b)(5) of this Section and proof that the notification required in subsection (c) of this Section has been submitted.

- c) Each of the property owners identified in subsection (b)(5) of this Section and the unit of local government must receive written notification from the party desiring to use the institutional control that groundwater remediation objectives have been approved by the Agency. Written proof of this notification shall be submitted to the Agency within 45 days from the date of the instrument memorializing the Agency's no further remediation determination. The notification shall include:
 - 1) The name and address of the unit of local government;
 - 2) The citation to the ordinance;
 - 3) A description of the property being sent notice by adequate legal description or by reference to a plat showing the boundaries;
 - 4) A statement that the ordinance restricting groundwater use has been used by the Agency in reviewing a request for a groundwater remediation objective;
 - 5) A statement as to the nature of the release and response action with the site name, address, and Agency site number or Illinois inventory identification number; and
 - A statement as to where more information may be obtained regarding the ordinance.
- d) Unless the Agency and the unit of local government have entered into a MOU under subsection (i) of this Section, the current owner or successors in interest of a site who have received approval of use of an ordinance as an institutional control under this Section shall:
 - Monitor activities of the unit of local government relative to variance requests or changes in the ordinance relative to the use of potable groundwater at properties identified in subsection (b)(4) of this Section; and
 - 2) Notify the Agency of any approved variance requests or ordinance changes within 30 days after the date such action has been approved.
- e) The information required in subsections (b)(1) through (b)(6) of this Section and the Agency letter approving the groundwater remediation objective shall be submitted to the unit of local government. Proof that the information has been filed with the unit of local government shall be provided to the Agency.

- f) Any ordinance or MOU used as an institutional control pursuant to this Section shall be recorded in the Office of the Recorder or Registrar of Titles of the county in which the site is located together with the instrument memorializing the Agency's no further remediation determination pursuant to the specific program within 45 days after receipt of the Agency's no further remediation.
- g) An institutional control approved under this Section shall not become effective until officially recorded in accordance with subsection (f) of this Section. The person receiving the approval shall obtain and submit to the Agency within 30 days after recording a copy of the institutional control demonstrating that it has been recorded.
- h) The following shall be grounds for voidance of the ordinance as an institutional control and the instrument memorializing the Agency's no further remediation determination:
 - 1) Modification of the ordinance by the unit of local government to allow potable use of groundwater;
 - 2) Approval of a site-specific request, such as a variance, to allow potable use of groundwater at a site identified in subsection (b)(4) of this Section; or
 - 3) Violation of the terms of an institutional control recorded under Section 742.1005 or Section 742.1010.
- i) The Agency and a unit of local government may enter into a MOU under this Section if the unit of local government has adopted an ordinance satisfying subsection (a) of this Section and if the requirements of this subsection are met. The MOU shall include the following:
 - 1) Identification of the authority of the unit of local government to enter the MOU;
 - 2) Identification of the legal boundaries, or equivalent, under which the ordinance is applicable;
 - 3) A certified copy of the ordinance;
 - A commitment by the unit of local government to notify the Agency of any variance requests or proposed ordinance changes at least 30 days prior to the date the local government is scheduled to take action on the request or proposed change;

- 5) A commitment by the unit of local government to maintain a registry of all sites within the unit of local government that have received no further remediation determinations pursuant to specific programs and
- 6) If the ordinance does not expressly prohibit the installation of potable water supply wells (and the use of such wells) by units of local government, a commitment by the unit of local government:
 - A) To review the registry of sites established under subsection (i)(5) of this Section prior to siting potable water supply wells within the area covered by the ordinance;
 - B) To determine whether the potential source of potable water may be or has been affected by contamination left in place at those sites; and
 - C) To take whatever steps are necessary to ensure that the potential source of potable water is protected from the contamination or treated before it is used as a potable water supply.

Section 742.1020 Highway Authority Agreements

- a) An agreement with a highway authority may be used as an institutional control where the requirements of this Section are met and the Agency has determined that no further remediation is required as to the property(ies) to which the agreement is to apply.
- b) As part of the agreement the highway authority shall agree to:
 - 1) Prohibit the use of groundwater under the highway right of way that is contaminated above residential Tier 1 remediation objectives from the release as a potable supply of water.
 - 2) Limit access to soil contamination under the highway right of way that is contaminated above residential Tier 1 remediation objectives from the release. Access to soil contamination may be allowed if, during and after any access, public health and the environment are protected.
- c) A request for approval of an agreement as an institutional control shall provide the following:
 - 1) A copy of the agreement executed by the highway authority and the owner of the property from which the release occurred;

- 2) A scaled map delineating the areal extent of soil and groundwater contamination above the applicable Tier 1 remediation objectives;
- 3) Information showing the concentration of contaminants of concern within the zone in which the applicable Tier 1 remediation objectives are exceeded;
- 4) A stipulation of the information required by subsection (b) of this Section in the agreement if it is not practical to obtain the information by sampling the highway right-of-way; and
- 5) Information identifying the current fee owner of the highway right-of-way and highway authority having jurisdiction.
- d) Violation of the terms of an Agreement approved by the Agency as an institutional control under this Section shall be grounds for voidance of the Agreement as an institutional control and the instrument memorializing the Agency's no further remediation determination.

SUBPART K: ENGINEERED BARRIERS

Section 742.1100 Engineered Barriers

- a) Any person who develops remediation objectives under this Part based on engineered barriers shall meet the requirements of this Subpart and the requirements of Subpart J relative to institutional controls.
- b) The Agency shall not approve any remediation objective under this Part that is based on the use of engineered barriers unless the person has proposed engineered barriers meeting the requirements of this Subpart.
- c) The use of engineered barriers can be recognized in calculating remediation objectives only if the engineered barriers are intended for use as part of the final corrective action.
- d) Any no further remediation determination based upon the use of engineered barriers shall require effective maintenance of the engineered barrier. The maintenance requirements shall be included in an institutional control under Subpart J. This institutional control shall address provisions for temporary breaches of the barrier by requiring the following if intrusive construction work is to be performed in which the engineered barrier is to be temporarily breached:


- 1) The construction workers shall be notified by the site owner/operator in advance of intrusive activities. Such notification shall enumerate the contaminant of concern known to be present; and
- 2) The site owner/operator shall require construction workers to implement protective measures consistent with good industrial hygiene practice.
- e) Failure to maintain an engineered barrier in accordance with the no further remediation determination shall be grounds for voidance of that determination and the instrument memorializing the Agency's no further remediation determination.

Section 742.1105 Engineered Barrier Requirements


- a) Natural attenuation, access controls, and point of use treatment shall not be considered engineered barriers. Engineered barriers may not be used to prevent direct human exposure to groundwater without the use of institutional controls.
- b) For purposes of determining remediation objectives under Tier 1, engineered barriers are not recognized.
- c) The following engineered barriers are recognized for purposes of calculating remediation objectives that exceed residential remediation objectives:
 - 1) For the soil component of the groundwater ingestion exposure route, the following engineered barriers are recognized:
 - A) Caps, covering the contaminated media, constructed of compacted clay, asphalt, concrete or other material approved by the Agency; and
 - B) Permanent structures such as buildings and highways.
 - 2) For the soil ingestion exposure route, the following engineered barriers are recognized:
 - A) Caps, covering the contaminated media, constructed of compacted clay, asphalt, concrete, or other material approved by the Agency;
 - B) Permanent structures such as buildings and highways; and

- C) Clean soil, covering the contaminated media, that is a minimum of 3 feet in depth.
- 3) For the inhalation exposure route, the following engineered barriers are recognized:
 - A) Caps, covering the contaminated media, constructed of compacted clay, asphalt, concrete, or other material approved by the Agency;
 - B) Permanent structures such as buildings and highways; and
 - C) Clean soil covering the contaminated media, that is a minimum of 10 feet in depth and not within 10 feet of any manmade pathway.
- 4) For the ingestion of groundwater exposure route, the following engineered barriers are recognized:
 - A) Slurry walls; and
 - B) Hydraulic control of groundwater.
- d) Unless otherwise prohibited under Section 742.1100, any other type of engineered barrier may be proposed if it will be as effective as the options listed in subsection (c) of this Section.

Section 742.Illustration A: Developing Soil Remediation Objectives Under the Tiered Approach

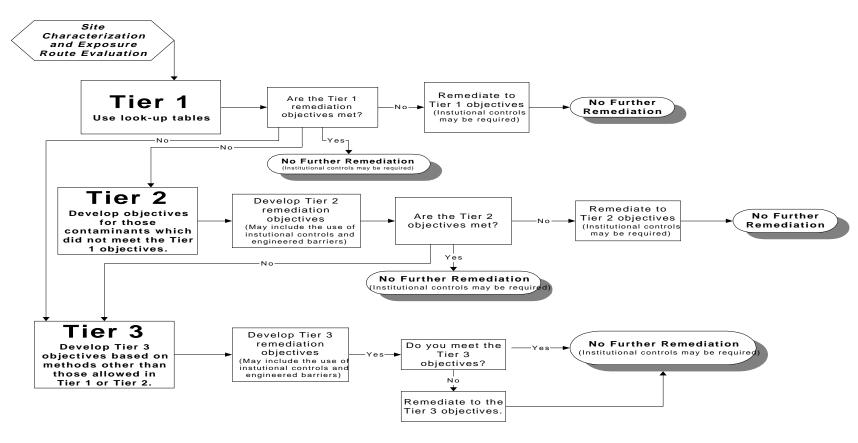

Section 742.Illustration B: Developing Groundwater Remediation Objectives Under the Tiered Approach

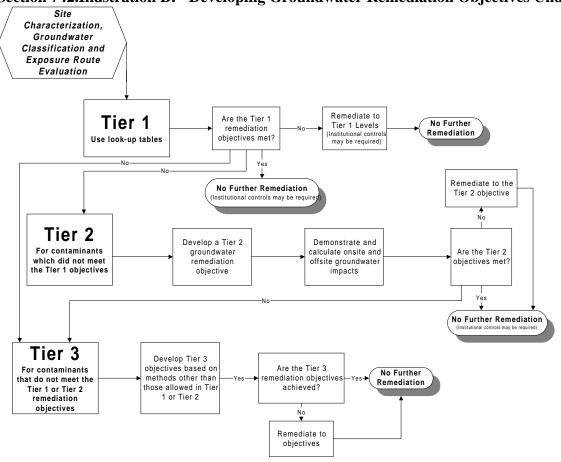

Section 742.TABLE A: Soil Saturation Limits ($C_{\rm sat}$) for Chemicals Whose Melting Point is Less than 30° C

CAS No.	Chemical Name	C _{sat} (mg/kg)
67-64-1	Acetone	100,000
71-43-2	Benzene	870
111-44-4	Bis(2-chloroethyl)ether	3,300
117-81-7	Bis(2-ethylhexyl)phthalate	31,000
75-27-4	Bromodichloromethane (Dichlorobromomethane)	3,000
75-25-2	Bromoform	1,900
71-36-3	Butanol	10,000
85-68-7	Butyl benzyl phthalate	930
75-15-0	Carbon disulfide	720
56-23-5	Carbon tetrachloride	1,100
108-90-7	Chlorobenzene (Monochlorobenzene)	680
124-48-1	Chlorodibromomethane (Dibromochloromethane)	1,300
67-66-3	Chloroform	2,900
96-12-8	1,2-Dibromo-3-chloropropane	1,400
106-93-4	1,2-Dibromoethane (Ethylene dibromide)	2,800
84-74-2	Di-n-butyl phthalate	2,300
95-50-1	1,2-Dichlorobenzene (o-Dichlorobenzene)	560
75-34-3	1,1-Dichloroethane	1,700
107-06-2	1,2-Dichloroethane (Ethylene dichloride)	1,800
75-35-4	1,1-Dichloroethylene	1,500
156-59-2	cis-1,2-Dichloroethylene	1,200
156-60-5	trans-1,2-Dichloroethylene	3,100
78-87-5	1,2-Dichloropropane	1,100
542-75-6	1,3-Dichloropropene (1,3-Dichloropropylene, cis + trans)	1,400

CAS No.	Chemical Name	C _{sat} (mg/kg)
84-66-2	Diethyl phthalate	2,000
117-84-0	Di-n-octyl phthalate	10,000
100-41-4	Ethylbenzene	400
77-47-4	Hexachlorocyclopentadiene	2,200
78-59-1	Isophorone	4,600
74-83-9	Methyl bromide (Bromomethane)	3,200
75-09-2	Methylene chloride (Dichloromethane)	2,400
98-95-3	Nitrobenzene	1,000
100-42-5	Styrene	1,500
127-18-4	Tetrachloroethylene (Perchloroethylene)	240
108-88-3	Toluene	650
120-82-1	1,2,4-Trichlorobenzene	3,200
71-55-6	1,1,1-Trichloroethane	1,200
79-00-5	1,1,2-Trichloroethane	1,800
79-01-6	Trichloroethylene	1,300
108-05-4	Vinyl acetate	2,700
75-01-4	Vinyl chloride	1,200
108-38-3	m-Xylene	420
95-47-6	o-Xylene	410
106-42-3	p-Xylene	460
1330-20-7	Xylenes (total)	410
	Ionizable Organics	
95-57-8	2-Chlorophenol	53,000

Section 742.TABLE B: Tolerance Factor (K)

Tolerance factors (K) for one-sided normal tolerance intervals with probability level (confidence factor) Y = 0.95 and coverage P = 95%. n = number of samples collected.

<u>n</u>	<u>K</u>	<u>n</u>	<u>K</u>
3	7.655	175	1.850
4	5.145	200	1.836
5	4.202	225	1.824
6	3.707	250	1.814
7	3.399	275	1.806
8	3.188	300	1.799
9	3.031	325	1.792
10	2.911	350	1.787
11	2.815	375	1.782
12	2.736	400	1.777
13	2.670	425	1.773
14	2.614	450	1.769
15	2.566	475	1.766
16	2.523	500	1.763
17	2.486	525	1.760
18	2.543	550	1.757
19	2.423	575	1.754
20	2.396	600	1.752
21	2.371	625	1.750
22	2.350	650	1.748
23	2.329	675	1.746
24	2.309	700	1.744
25	2.292	725	1.742
30	2.220	750	1.740
35	2.166	<u>n</u>	<u>K</u>
40	2.126		
45	2.092	775	1.739
50	2.065	800	1.737
55	2.036	825	1.736
60	2.017	850	1.734
65	2.000	875	1.733
70	1.986	900	1.732
75	1.972	925	1.731
100	1.924	950	1.729
125	1.891	975	1.728
150	1.868	1000	1.727

Section 742.TABLE C: Coefficients $\{A_{N-l+1}\}\$ for W Test of Normality, for N=2(1)50

.,			,	_		_			10	
i/n	2.	3	4	5	6	7	8	9	10	
1	0.7071	0.7071	0.6872	0.6646	0.6431	0.6233	0.6052	0.5888	0.5739	
2.		.0000	1677	2413	2806	3031	3164	3244	3291	
3				.0000	0875	1401	1743	1976	2141	
4						.0000	.0561	.0947	1224	
5								.0000	0399	
								T		
i/n	11	12	13	14	15	16	17	18	19	20
1	0.5601	0.5475	0.5359	0.5251	0.5150	0.5056	0.4968	0.4886	0.4808	0.4734
2	3315	3325	3325	3318	3306	3290	3273	3253	3232	3211
3	2260	2347	2412	2460	2495	2521	2540	2553	2561	2565
4	1429	1586	1707	1802	1878	1939	1988	2027	2059	2085
5	0695	.0922	1099	1240	1353	1447	1524	1587	1641	1686
6	0.0000	0.0303	0.0539	0.0727	0.0880	0.1005	0.1109	0.1197	0.1271	0.1334
7			.0000	0240	0433	0593	.0725	0837	0932	1013
8					.0000	.0196	.0359	0496	0612	.0711
9							.0000	0163	0303	.0422
10									0000	0140

i/n	2.1	2.2.	23	24	25	26	2.7	2.8	29	30
1	0.4643	0.4590	0.4542	0.4493	0.4450	0.4407	0.4366	0.4328	0.4291	0.4254
2.	3185	3156	3126	3098	3069	3043	3018	2992	2968	2944
3	2578	2571	2563	2554	2543	.2533	2522	2510	2499	2487
4	2119	.2131	2139	2145	2148	.2151	2152	2151	2150	2148
5	1736	1764	1787	1807	1822	1836	1848	1857	1864	1870
			I					T	T	T
6	0.1399	0.1443	0.1480	0.1512	0.1539	0.1563	0.1584	0.1601	0.1616	0.1630
7	1092	1150	1201	1245	1283	1316	1346	1372	1395	1415
8	0804	0878	.0941	0997	1046	1089	1128	1162	1192	1219
9	.0530	.0618	.0696	0764	.0823	.0876	.0923	.0965	1002	1036
10	0263	0368	0459	0539	.0610	.0672	0728	0778	0822	0862
			I					T	T	T
11	0.0000	0.0122	0.0228	0.0321	0.0403	0.0476	0.0540	0.0598	0.0650	0.0697
12.			.0000	0107	.0200	0284	0358	0424	0483	.0537
13					.0000	.0094	.0178	.0253	0320	0381
14							.0000	.0084	0159	.02.2.7
15									.0000	.0076

i/n	31	32	33	34	35	36	37	38	39	40
1	0.4220	0 4188	0.4156	0.4127	0 4096	0 4068	0 4040	0.4015	0 3989	0 3964
2.	2921	2898	2876	2854	2834	2813	2794	2774	2755	2737
3	2475	2463	2451	2439	2427	2415	2403	2391	2380	2368
4	2145	2141	2137	2132	2127	2121	2116	2110	2104	2098
5	1874	1878	1880	1882	1883	1883	1883	1881	1880	1878
								T	T	
i/n	31	32	33	34	35	36	37	38	39	40
6	0 1641	0 1651	0 1660	0 1667	0 1673	0 1678	0 1683	0 1686	0 1689	0 1691
7	1433	1449	1463	1475	1487	1496	1503	1513	1520	1526
8	1243	1265	1284	1301	1317	1331	1344	1356	1366	1376
9	1066	1093	1118	1140	1160	1179	1196	1211	1225	1237
10	0899	0931	0961	0988	1013	1036	1056	1075	1092	1108
							.	T		
11	0.0739	0 0777	0.0812	0 0844	0.0873	0.0900	0.0924	0.0947	0.0967	0 0986
12	0585	0629	0669	0706	0739	0770	0798	0824	0848	0870
13	0435	0485	0530	0572	0610	0645	0677	0706	0733	0759
14	0289	0344	0395	0441	0484	0523	0559	0592	0622	0651
15	0144	0206	0262	0314	0361	0404	0444	0481	0515	0546
ı										

	1								ı	
16	0.0000	0.0068	0.0131	0.0187	0.0239	0.0287	0.0331	0.0372	0.0409	0 0444
17			0000	0062	0119	0172	0220	0264	0305	0343
18					0000	0057	0110	0158	0203	0244
19							0000	0053	0101	0146
20									0000	0049
i/n	41	42	43	44	45	46	47	48	49	50
11	0.3940	0 3917	0 3894	0.3872	0 3850	0.3830	0.3808	0 3789	0.3770	0 3751
2	2719	2701	2684	2667	2651	2635	2620	2604	2589	2574
3	2357	2345	2334	2323	2313	2302	2291	2281	2271	2260
4	2091	2085	2078	2072	2065	2058	2052	2045	2038	2032
5	1876	1874	1871	1868	1865	1862	1859	1855	1851	1847
i/n	41	42	43	44	45	46	47	48	49	50
6	0 1693	0 1694	0 1695	0 1695	0 1695	0 1695	0 1695	0 1693	0 1692	0 1691
7	1531	1535	1539	1542	1545	1548	1550	1551	1553	1554
8	1384	1392	1398	1405	1410	1415	1420	1423`	1427	1430
9	1249	1259	1269	1278	1286	1293	1300	1306	1312	1317
10	1123	1136	1149	1160	1170	1180	1189	1197	1205	1212

11	0 1004	0 1020	0 1035	0 1049	0.1062	0 1073	0.1085	0 1095	0.1105	0 1113
12	0891	0909	0927	0943	0959	0972	0986	0998	1010	1020
13	0782	0804	0824	0842	0860	0876	0892	0906	0919	0932
14	0677	0701	0724	0745	0775	0785	0801	0817	0832	0846
15	0575	0602	0628	0651	0673	0694	0713	0731	0748	0764
16	0.0476	0.0506	0.0534	0.0560	0.0584	0.0607	0.0628	0.0648	0.0667	0.0685
17	0379	0411	0442	0471	0497	0522	0546	0568	0588	0608
18	0283	0318	0352	0383	0412	0439	0465	0489	0511	0532
19	0188	0227	0263	0296	0328	0357	0385	0411	0436	0459
20	0094	0136	0175	0211	0245	0277	0307	0335	0361	0386
2.1	0.0000	0.0045	0.0087	0.0126	0.0163	0.0197	0.0229	0.0259	0.0288	0.0314
22			0000	0042	0081	0118	0153	0185	0215	0244
23					0000	0039	0076	0111	0143	0174
24							0000	0037	0071	0104
25									0000	0035

Section 742.TABLE D: Percentage Points of the W Test for N=3(1)50

n	0.01	0.05
3	0.753	0.767
4	0.687	0.748
5	0.686	0.762
6	0.713	0.788
7	0.730	0.803
8	0.749	0.818
9	0.764	0.829
10	0.781	0.842
11	0.792	0.850
12	0.805	0.859
13	0.814	0.866
14	0.825	0.874
15	0.835	0.881
16	0.844	0.887
17	0.851	0.892
18	0.858	0.897
19	0.863	0.901
20	0.868	0.905
21	0.873	0.908
22	0.878	0.911
23	0.881	0.914
24	0.884	0.916
25	0.888	0.918
26	0.891	0.920
27	0.894	0.923
28	0.896	0.924
29	0.898	0.926
30	0.900	0.927
31	0.902	0.929
32	0.904	0.930
33	0.906	0.931

n	0.01	0.05
34	0.908	0.933
35	0.910	0.934

Section 742.TABLE E: Chemicals with Noncarcinogenic Toxic Effects on Specific Target Organs/Organ Systems or Similar Modes of Action

<u>Kidney</u>	<u>Central Nervous System</u>
Acetone	Butanol
Cadmium (Ingestion only)	Cyanide (amenable)
Chlorobenzene	2,4-Dimethylphenol
Dalapon	Endrin
1,1-Dichloroethane	Manganese
Di-n-octyl phthalate	2-Methylphenol
Endosulfan	Mercury
Ethylbenzene	Styrene
Fluoranthene	Xylenes
Nitrobenzene	
Pyrene	Circulatory System
Toluene	Antimony
2,4,5-Trichlorophenol	Barium
Vinyl acetate	2,4-D
1	cis-1,2-Dichloroethylene
<u>Liver</u>	Nitrobenzene
Acenaphthene	trans-1,2-Dichloroethylene
Acetone	2,4-Dimethylphenol
Butylbenzyl phthalate	Fluoranthene
1,1-Dichloroethylene	Fluorene
Chlorobenzene	Styrene
Di-n-octyl phthalate	Zinc
Endrin	Zinc
Ethylbenzene	Gastrointestinal System
Fluoranthene	Endothall
Nitrobenzene	
Picloram	Hexachlorocyclopentadiene Methyl bromide
	Methyl bromitde
Styrene	Doming directions
2,4,5-TP (Silvex)	Reproductive System
Toluene	Barium
2,4,5-Trichlorophenol	Boron
	Carbon disulfide
	2-Chlorophenol
	1,2 Dibromo-3-Chloropropane
	(Inhalation only)
	Dinoseb

Methoxychlor

Phenol

Cholinesterase Inhibition Aldicarb Carbofuran

<u>Decreased Body Weight Gains</u> <u>and Circulatory System Effects</u> Atrazine Simazine

Adrenal Gland

Nitrobenzene 1,2,4-Trichlorobenzene

Respiratory System

1,2-Dichloropropane
Hexachlorocyclopentadiene
Methyl bromide
Vinyl acetate

Immune System

2,4-Dichlorophenol p-Chloroaniline

Section 742.APPENDIX A: General

Section 742.TABLE F: Chemicals With Carcinogenic Toxic Effects on Specific Target Organs/Organ Systems or Similar Modes of Action

Kidney Bromodichloromethane Chloroform 1,2-Dibromo-3-chloropropane 2,4-Dinitrotoluene 2,6-Dinitrotoluene Hexachlorobenzene	
Liver Aldrin Bis(2-chloroethyl)ether Bis(2-ethylhexyl)phthalate Carbazole Carbon tetrachloride Chlordane Chloroform DDD DDE DDT 1,2-Dibromo-3-chloropropane 1,2-Dibromoethane 3,3'-Dichlorobenzidine 1,2-Dichloroethane 1,3-Dichloropropane (Ingestion only) 1,3-Dichloropropylene Dieldrin 2,4-Dinitrotoluene 2,6-Dinitrotoluene Heptachlor Heptachlor epoxide	
Hexachlorobenzene	7
alpha-HCH gamma-HCH (Lindane) Methylene chloride N-Nitrosodiphenylamine	<u>]</u>
N-Nitrosodi-n-propylamine	:
Pentachlorophenol	(

Tetrachloroethylene

Trichloroethylene

2,4,6-Trichlorophenol Toxaphene Vinyl chloride

<u>Circulatory System</u>
Benzene
2,4,6-Trichlorophenol

Gastrointestinal System
Benzo(a)anthracene
Benzo(b)fluoranthene
Benzo(k)fluoranthene
Benzo(a)pyrene
Chrysene
Dibenzo(a,h)anthracene
Indeno(1,2,3-c,d)pyrene
Bromodichloromethane
Bromoform

1,2-Dibromo-3-chloropropane
1,2-Dibromoethane

1,3-Dichloropropylene

Lung
Arsenic
Beryllium (Inhalation only)
Cadmium (Inhalation only)
Chromium, hexavalent
(Inhalation only)
1,3-Dichloropropylene
Methylene chloride
N-Nitrosodi-n-propylamine
Vinyl chloride

<u>Nasal Cavity</u>

1,2-Dibromo-3-chloropropane
(Inhalation only)
1,2-Dibromoethane (Inhalation only)
N-Nitrosodi-n-propylamine

Bladder
3,3'-Dichlorobenzidine

1,3-Dichloropropylene N-Nitrosodiphenylamine

Section 742.APPENDIX A: General

Section 742.TABLE G: Background Soils

Concentrations of Inorganic Chemicals in


Chemical Name	Counties Within Metropolitan Statistical Areas ^a (mg/kg)	Counties Outside Metropolitan Statistical Areas (mg/kg)
Aluminum	9,500	9,200
Antimony	4.0	3.3
Arsenic	7.2	5.2
Barium	110`	122
Beryllium	0.59	0.56
Cadmium	0.6	0.50
Calcium	9,300	5,525
Chromium	16.2	13.0
Cobalt	8.9	8.9
Copper	19.6	12.0
Cyanide	0.51	0.50
Iron	15,900	15,000
Lead	36.0	20.9
Magnesium	4,820	2,700
Manganese	636	630
Mercury	0.06	0.05

_

^aCounties within Metropolitan Statistical Areas: Boone, Champaign, Clinton, Cook, DuPage, Grundy, Henry, Jersey, Kane, Kankakee, Kendall, Lake, Macon, Madison, McHenry, McLean, Menard, Monroe, Peoria, Rock Island, Sangamon, St. Clair, Tazewell, Will, Winnebago and Woodford.

Chemical Name	Counties Within	Counties Outside
	Metropolitan	Metropolitan
	Statistical Areas ^a	Statistical Areas
	(mg/kg)	(mg/kg)
Nickel	18.0	13.0
Potassium	1,268	1,100
Selenium	0.48	0.37
Silver	0.55	0.50
Sodium	130	130.0
Sulfate	85.5	110
Sulfide	3.1	2.9
Thallium	0.32	0.42
Vanadium	25.2	25.0
Zinc	95.0	60.2

Section 742.APPENDIX B: Tier 1 Tables and Illustrations Section 742.Illustration A: Tier 1 Evaluation

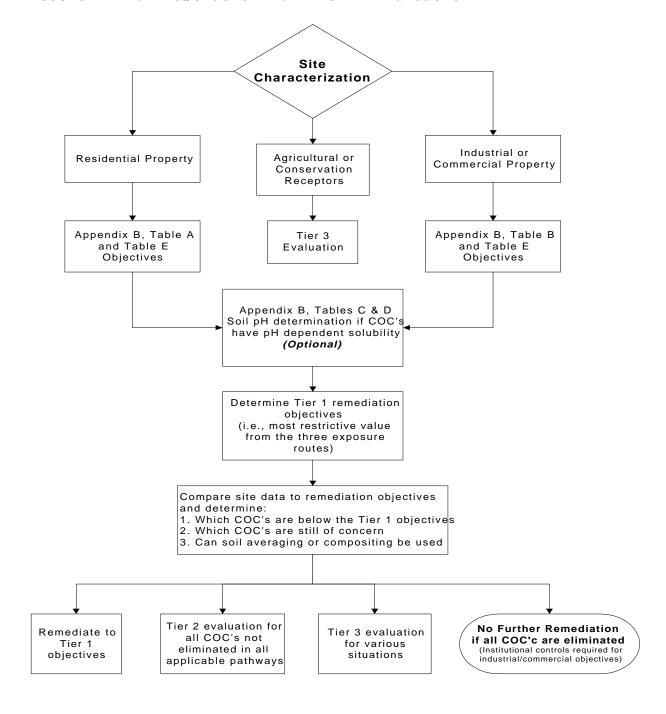

Section 742.APPENDIX B: Tier 1 Tables and Illustrations

Section 742.TABLE A: Tier 1 Soil Remediation Objectives^a for Residential Properties

		Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values			
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)	
83-32-9	Acenaphthene	4,700 ^b	c	570 ^b	2,900	*	
67-64-1	Acetone	7,800 ^b	100,000 ^d	16 ^b	16	*	
15972-60-8	Alachlor ^o	8 ^e	c	0.04	0.2	NA	
116-06-3	Aldicarbo	78 ^b	c	0.013	0.07	NA	
309-00-2	Aldrin	$0.04^{\rm e}$	3 ^e	0.5 ^e	2.5	*	
120-12-7	Anthracene	23,000 ^b	c	12,000 ^b	59,000	*	
1912-24-9	Atrazine°	2700 ^b	c	0.066	0.33	NA	
71-43-2	Benzene	22 ^e	0.8°	0.03	0.17	*	
56-55-3	Benzo(a)anthracene	0.9°	c	2	8	*	
205-99-2	Benzo(b)fluoranthene	0.9°	c	5	25	*	

		Exposure Route-Specific Values for Soils		Groundwate Exposur	onent of the er Ingestion re Route	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
207-08-9	Benzo(k)fluroanthene	9 ^e	^c	49	250	*
50-32-8	Benzo(a)pyrene	$0.09^{\mathrm{e,f}}$	c	8	82	*
111-44-4	Bis(2-chloroethyl)ether	$0.6^{\rm e}$	0.2 ^{e,f}	$0.0004^{\rm e,f}$	0.0004	0.66
117-81-7	Bis(2-ethylhexyl)phthalate	46 ^e	31,000 ^d	3,600	31,000 ^d	*
75-27-4	Bromodichloromethane (Dichlorobromomethane)	10°	$3,000^{d}$	0.6	0.6	*
75-25-2	Bromoform	81 ^e	53 ^e	0.8	0.8	*
71-36-3	Butanol	$7,800^{\mathrm{b}}$	10,000 ^d	17 ^b	17	NA
85-68-7	Butyl benzyl phthalate	16,000 ^b	930 ^d	930 ^d	930 ^d	*
86-74-8	Carbazole	32 ^e	c	$0.6^{\rm e}$	2.8	NA
1563-66-2	Carbofuran°	390 ^b	c	0.22	1.1	NA
75-15-0	Carbon disulfide	7,800 ^b	720 ^d	32 ^b	160	*

		Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values			
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)	
56-23-5	Carbon tetrachloride	5 ^e	0.3°	0.07	0.33	*	
57-74-9	Chlordane	0.5 ^e	20 ^e	10	48	*	
106-47-8	4-Chloroaniline (p-Chloroaniline)	310 ^b	c	0.7^{b}	0.7	1.3	
108-90-7	Chlorobenzene (Monochlorobenzene)	1,600 ^b	130 ^b	1	6.5	*	
124-48-1	Chlorodibromomethane (Dibromochloromethane)	1,600 ^b	1,300 ^d	0.4	0.4	*	
67-66-3	Chloroform	100 ^e	0.3°	0.6	2.9	*	
218-01-9	Chrysene	88°	c	160	800	*	
94-75-7	2,4-D	780 ^b	c	1.5	7.7	*	
75-99-0	Dalapon	2,300 ^b	c	0.85	8.5	1.2	
72-54-8	DDD	3 ^e	c	16 ^e	80	*	
72-55-9	DDE	2 ^e	c	54 ^e	270	*	

		Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
50-29-3	DDT	2 ^e	g	32 ^e	160	*
53-70-3	Dibenzo(a,h)anthracene	$0.09^{\mathrm{e,f}}$	c	2	7.6	*
96-12-8	1,2-Dibromo-3- chloropropane	$0.46^{\rm e}$	11 ^b	0.002	0.002	*
106-93-4	1,2-Dibromoethane (Ethylene dibromide)	0.0075°	$0.17^{\rm e}$	0.0004	0.004	0.005
84-74-2	Di- <i>n</i> -butyl phthalate	$7,800^{\mathrm{b}}$	2,300 ^d	2,300 ^d	2,300 ^d	*
95-50-1	1,2-Dichlorobenzene (<i>o</i> - Dichlorobenzene)	7,000 ^b	560 ^d	17	43	*
106-46-7	1,4-Dichlorobenzene (p - Dichlorobenzene)	c	g	2	11	*
91-94-1	3,3'-Dichlorobenzidine	1 ^e	c	0.007 ^{e,f}	0.033	1.3
75-34-3	1,1-Dichloroethane	7,800 ^b	1,300 ^b	23 ^b	110	*

		Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values			
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)	
107-06-2	1,2-Dichloroethane (Ethylene dichloride)	7°	0.4°	0.02	0.1	*	
75-35-4	1,1-Dichloroethylene	700 ^b	1,500 ^d	0.06	0.3	*	
156-59-2	cis-1,2-Dichloroethylene	780 ^b	1,200 ^d	0.4	1.1	*	
156-60-5	trans-1,2- Dichloroethylene	1,600 ^b	$3,100^{d}$	0.7	3.4	*	
78-87-5	1,2-Dichloropropane	9 ^e	15 ^b	0.03	0.15	*	
542-75-6	1,3-Dichloropropene (1,3-Dichloropropylene, <i>cis</i> + <i>trans</i>)	4 ^e	0.1°	0.004°	0.02	0.005	
60-57-1	Dieldrin ⁿ	0.04 ^e	1 ^e	0.004 ^e	0.02	*	
84-66-2	Diethyl phthalate	63,000 ^b	2,000 ^d	470 ^b	470	*	
105-67-9	2,4-Dimethylphenol	1,600 ^b	c	9 ^b	9	*	
121-14-2	2,4-Dinitrotoluene	$0.9^{\rm e}$	c	0.0008 ^{e,f}	0.0008	0.013	

		Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values			
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)	
606-20-2	2,6-Dinitrotoluene	0.9 ^e	c	0.0007 ^{e,f}	0.0007	0.0067	
117-84-0	Di-n-octyl phthalate	1,600 ^b	10,000 ^d	10,000 ^d	10,000 ^d	*	
115-29-7	Endosulfan	470 ^b	c	18 ^b	90	*	
145-73-3	Endothall°	1,600 ^b	c	0.4	0.4	NA	
72-20-8	Endrin	23 ^b	c	1	5	*	
100-41-4	Ethylbenzene	$7,800^{\mathrm{b}}$	400 ^d	13	19	*	
206-44-0	Fluoranthene	$3,100^{\mathrm{b}}$	c	4,300 ^b	21,000	*	
86-73-7	Fluorene	$3,100^{\mathrm{b}}$	c	560 ^b	2,800	*	
76-44-8	Heptachlor	0.1 ^e	0.1 ^e	23	110	*	
1024-57-3	Heptachlor epoxide	$0.07^{\rm e}$	5 ^e	0.7	3.3	*	
118-74-1	Hexachlorobenzene	0.4 ^e	1 ^e	2	11	*	
319-84-6	alpha-HCH (alpha-BHC)	0.1 ^e	0.8°	$0.0005^{e,f}$	0.003	0.002	

		Exposure Route-Spec	Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
58-89-9	gamma-HCH (Lindane) ⁿ	$0.5^{\rm e}$	c	0.009	0.047	*
77-47-4	Hexachlorocyclopentadien e	550 ^b	10 ^b	400	2,200 ^d	*
67-72-1	Hexachloroethane	78 ^b	c	0.5 ^b	2.6	*
193-39-5	Indeno(1,2,3-c,d)pyrene	$0.9^{\rm e}$	c	14	69	*
78-59-1	Isophorone	15,600 ^b	4,600 ^d	8 ^b	8	*
72-43-5	Methoxychlor	390 ^b	c	160	780	*
74-83-9	Methyl bromide (Bromomethane)	110 ^b	10 ^b	0.2 ^b	1.2	*
75-09-2	Methylene chloride (Dichloromethane)	85°	13°	$0.02^{\rm e}$	0.2	*
95-48-7	2-Methylphenol (o - Cresol)	3,900 ^b	c	15 ^b	15	*
91-20-3	Naphthalene	3,100 ^b	c	84 ^b	420	*
98-95-3	Nitrobenzene	39 ^b	92 ^b	0.1 ^{b,f}	0.1	0.26

		Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values			
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)	
86-30-6	<i>N</i> -Nitrosodiphenylamine	130 ^e	c	1 ^e	5.6	*	
621-64-7	<i>N</i> -Nitrosodi- <i>n</i> -propylamine	0.09 ^{e,f}	c	0.00005 ^{e,f}	0.00005	0.66	
108-95-2	Phenol	47,000 ^b	c	100 ^b	100	*	
1918-02-1	Picloram ^o	5,500 ^b	c	2	20	NA	
1336-36-3	Polychlorinated biphenyls (PCBs) ⁿ	1; 10 ^h	c,h	h	h	*	
129-00-0	Pyrene	2,300 ^b	c	4,200 ^b	21,000	*	
122-34-9	Simazine°	390 ^b	^c	0.04	0.37	NA	
100-42-5	Styrene	16,000 ^b	1,500 ^d	4	18	*	
127-18-4	Tetrachloroethylene (Perchloroethylene)	12 ^e	11°	0.06	0.3	*	
108-88-3	Toluene	16,000 ^b	650 ^d	12	29	*	

		Exposure Route-Specific Values for Soils		Soil Component of the Groundwater Ingestion Exposure Route Values		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
8001-35-2	Toxaphene ⁿ	$0.6^{\rm e}$	89 ^e	31	150	*
120-82-1	1,2,4-Trichlorobenzene	780 ^b	3,200 ^b	5	53	*
71-55-6	1,1,1-Trichloroethane	c	1,200 ^d	2	9.6	*
79-00-5	1,1,2-Trichloroethane	310 ^b	1,800 ^d	0.02	0.3	*
79-01-6	Trichloroethylene	58°	5 ^e	0.06	0.3	*
108-05-4	Vinyl acetate	78,000 ^b	1,000 ^b	170 ^b	170	*
75-01-4	Vinyl chloride	$0.3^{\rm e}$	0.03 ^e	0.01 ^f	0.07	*
108-38-3	m-Xylene	160,000 ^b	420 ^d	210	210	*
95-47-6	o-Xylene	160,000 ^b	410 ^d	190	190	*
106-42-3	p-Xylene	160,000 ^b	460 ^d	200	200	*

		Exposure Route-Spec	cific Values for Soils	Soil Compo Groundwate Exposur Val		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
1330-20-7	Xylenes (total)	160,000 ^b	410 ^d	150	150	*
	Ionizable Organics					
65-85-0	Benzoic Acid	310,000 ^b	c	400 ^{b,i}	400 ⁱ	*
95-57-8	2-Chlorophenol	390 ^b	53,000 ^d	4 ^{b,i}	4 ⁱ	*
120-83-2	2,4-Dichlorophenol	230 ^b	c	$1^{b,i}$	1 ⁱ	*
51-28-5	2,4-Dinitrophenol	160 ^b	c	$0.2^{\mathrm{b,f}}$	0.2	3.3
88-85-7	Dinoseb°	78 ^b	c	$0.34^{\text{b,i}}$	3.4 ⁱ	*
87-86-5	Pentachlorophenol	3 ^{e,j}	c	0.03 ^{f,i}	0.14 ⁱ	2.4
93-72-1	2,4,5-TP (Silvex)	630 ^b	c	11 ⁱ	55 ⁱ	*
95-95-4	2,4,5-Trichlorophenol	7,800 ^b	c	270 ^{b,i}	1,400 ⁱ	*
88-06-2	2,4,6 Trichlorophenol	58°	200°	$0.2^{\rm e,f,i}$	0.77 ⁱ	0.43

		Exposure Route-spec	cific Values for Soils	Soil Compo Groundwat Exposur Val		
CAS No.	Chemical Name	Ingestion Inhalation (mg/kg) (mg/kg)		Class I (mg/L)	Class II (mg/L)	ADL (mg/kg)
	Inorganics					
7440-36-0	Antimony	31 ^b	c	0.006^{m}	0.024 ^m	*
7440-38-2	Arsenic ^{1,n}	0.4 ^{e,t}	750°	0.05^{m}	0.2 ^m	*
7440-39-3	Barium	5,500 ^b	690,000 ^b	2.0 ^m	$2.0^{\rm m}$	*
7440-41-7	Beryllium	0.1 ^{e,t}	1,300 ^e	0.004 ^m	0.5 ^m	*
7440-42-8	Boron	7,000 ^b	^g	$2.0^{\rm m}$	$2.0^{\rm m}$	*
7440-43-9	Cadmium ^{l,n}	78 ^{b, r}	1,800°	0.005 ^m	0.05 ^m	*
16887-00-6	Chloride	c	c	200 ^m	200 ^m	*
7440-47-3	Chromium, total	390 ^b	270°	0.1 ^m	1.0 ^m	*
16065-83-1	Chromium, ion, trivalent	78,000 ^b	c	g	g	*
18540-29-9	Chromium, ion, hexavalent	390 ^b	270°			*
7440-48-4	Cobalt	4,700 ^b	c	1.0 ^m	1.0 ^m	*

		Exposure Route-spe	cific Values for Soils	Groundwat Exposu	onent of the er Ingestion re Route	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/L)	Class II (mg/L)	ADL (mg/kg)
7440-50-8	Copper ⁿ	2,900 ^b	c	0.65 ^m	0.65 ^m	*
57-12-5	Cyanide (amenable)	1,600 ^b	c	$0.2^{\rm q}$	0.6^{q}	*
7782-41-4	Fluoride	4,700 ^b	c	4.0 ^m	4.0 ^m	*
15438-31-0	Iron	c	c	5.0 ^m	5.0 ^m	*
7439-92-1	Lead	400 ^k	c	0.0075 ^m	0.1 ^m	*
7439-96-5	Manganese	3,700 ^b	69,000 ^b	0.15 ^m	10.0 ^m	*
7439-97-6	Mercury ^{l,n}	23 ^{b,s}	10 ^{b,i}	0.002 ^m	0.01 ^m	*
7440-02-0	Nickel ¹	1,600 ^b	13,000 ^e	0.1 ^m	2.0 ^m	*
14797-55-8	Nitrate as N ^p	130,000 ^b	c	10.0 ^q	100 ^q	*
7782-49-2	Selenium ^{l,n}	390 ^b	c	0.05 ^m	0.05 ^m	*

		Exposure Route-spec	cific Values for Soils	Groundwate Exposur	onent of the er Ingestion re Route	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/L)	Class II (mg/L)	ADL (mg/kg)
7440-22-4	Silver	390 ^b	c	0.05 ^m		*
14808-79-8	Sulfate	c	c	400 ^m	400 ^m	*
7440-28-0	Thallium	6.3 ^{b,u}	c	0.002 ^m	0.02 ^m	*
7440-62-2	Vanadium	550 ^b	c	0.049 ^m		*
7440-66-6	Zinc¹	23,000 ^b	c	5.0 ^m	10 ^m	*

[&]quot;*" indicates that the ADL is less than or equal to the specified remediation objective. NA means not available; no PQL or EQL available in USEPA analytical methods.

Chemical Name and Soil Remediation Objective Notations

- ^a Soil remediation objectives based on human health criteria only.
- b Calculated values correspond to a target hazard quotient of 1.
- No toxicity criteria available for the route of exposure.
- Soil saturation concentration (C_{sat}) = the concentration at which the absorptive limits of the soil particles, the solubility limits of the available soil moisture, and saturation of soil pore air have been reached. Above the soil saturation concentration, the assumptions regarding vapor transport to air and/or dissolved phase transport to groundwater (for chemicals which are liquid at ambient soil temperatures) have been violated, and alternative modeling approach es are required.
- ^e Calculated values correspond to a cancer risk level of 1 in 1,000,000.
- f Level is at or below Contract Laboratory Program required quantitation limit for Regular Analytical Services (RAS).
- ^g Chemical-specific properties are such that this route is not of concern at any soil contaminant concentration.
- A preliminary goal of 1 ppm has been set for PCBs based on *Guidance on Remedial Actions for Superfund Sites with PCB Contamination*, EPA/540G-90/007, and on USEPA efforts to manage PCB contamination. See 40 CFR 761.120 USEPA "PCB Spill Cleanup Policy." This regulation goes on to say that the remediation goal for an unrestricted area is 10 ppm and 25 ppm for a restricted area, provided both have at least 10 inches of clean cover.
- Soil remediation objective for pH of 6.8. If soil pH is other than 6.8, refer to Appendix B, Tables C and D of this Part.
- Ingestion soil remediation objective adjusted by a factor of 0.5 to account for dermal route.
- A preliminary remediation goal of 400 mg/kg has been set for lead based on *Revised Interim Soil Lead Guidance for CERCLA Sites and RCRA Corrective Action Facilities*, OSWER Directive #9355.4-12.
- Potential for soil-plant-human exposure.
- The person conducting the remediation has the option to use: 1) TCLP or SPLP test results to compare with the remediation objectives listed in this Table; or 2) the total amount of contaminant in the soil sample results to compare with pH specific remediation objectives listed in Appendix B, Table C or D of this Part. (See Section 742.510.) If the person conducting the remediation wishes to calculate soil remediation objectives based on background concentrations, this should be done in accordance with Subpart D of this Part.
- The Agency reserves the right to evaluate the potential for remaining contaminant concentrations to pose significant threats to crops, livestock, or wildlife.
- For agrichemical facilities, remediation objectives for surficial soils which are based on field application rates may be more appropriate for currently registered pesticides. Consult the Agency for further information.
- For agrichemical facilities, soil remediation objectives based on site-specific background concentrations of Nitrate as N may be more appropriate. Such determinations shall be conducted in accordance with the procedures set forth in Subparts D and I of this Part.
- The TCLP extraction must be done using water at a pH of 7.0.
- Value based on dietary Reference Dose.
- ^s Value based on Reference Dose for Mercuric chloride (CAS No. 7487-94-7).
- Note that Table value is likely to be less than background concentration for this chemical; screening or remediation concentrations using the procedures of Subpart D of this Part may be more appropriate.
- ^u Value based on Reference Dose for thallium sulfate (CAS No. 7446-18-6).

Section 742.APPENDIX B: Tier 1 Tables and Illustrations

Section 742. Table B: Tier 1 Soil Remediation Objectives^a for Industrial/Commercial Properties

			Exposure Route-Specific Values for Soils Industrial- Construction				nponent of undwater Exposure oute lues	
			Industrial- Construction Commercial Worker					
CAS No.	Chemical Name	Ingestion Inhalation Ingestion Inhalation				Class I (mg/kg)	ClassII (mg/kg)	ADL (mg/kg)
83-32-9	Acenaphthene	120,000 ^b	120,000 ^b ^c 120,000 ^b ^c £				2,900	*
67-64-1	Acetone	200,000 ^b	100,000 ^d	200,000 ^b	100,000 ^d	16 ^b	16	*
15972-60-8	Alachlor ^o	72 ^e	c	1,600 ^e	^c	0.04	0.2	NA
116-06-3	Aldicarb ^o	2,000 ^b	c	200 ^b	^c	0.013	0.07	NA
309-00-2	Aldrin	0.3 ^e	6.6 ^e	6.1 ^b	9.3 ^e	0.5 ^e	2.5	*
120-12-7	Anthracene	610,000 ^b	610,000 ^b ^c 610,000 ^b ^c			12,000 ^b	59,000	*
1912-24-9	Atrazine ^o	72,000 ^b	72,000 ^b ^c 7,100 ^b ^c			0.066	0.33	NA
71-43-2	Benzene	200 ^e	1.5 ^e	4,300 ^e	2.1 ^e	0.03	0.17	*

		Expos	Exposure Route-Specific Values for Soils S In					
			Industrial- Commercial		Construction Worker		llues	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
56-55-3	Benzo(a)anthracene	8 ^e	^c	170 ^e	^c	2	8	*
205-99-2	Benzo(b)fluoranthene	8 ^e	^c	170 ^e	^c	5	25	*
207-08-9	Benzo(k)fluroanthene	78 ^e	c	1,700 ^e	с	49	250	*
50-32-8	Benzo(a)pyrene	0.8 ^e	c	17 ^e	c	8	82	*
111-44-4	Bis(2-chloroethyl)ether	5 ^e	0.47 ^e	75 ^e	0.66 ^e	0.0004 ^{e,f}	0.0004	0.66
117-81-7	Bis(2-ethylhexyl)phthalate	410 ^e	31,000 ^d	4,100 ^b	31,000 ^d	3,600	31,000 ^d	*
75-27-4	Bromodichloromethane (Dichlorobromomethane)	92 ^e	3,000 ^d	2,000 ^e	3,000 ^d	0.6	0.6	*
75-25-2	Bromoform	720 ^e	100 ^e	16,000 ^e	140 ^e	0.8	0.8	*
71-36-3	Butanol	200,000 ^b	10,000 ^d	200,000 ^b	10,000 ^d	17 ^b	17	NA
85-68-7	Butyl benzyl phthalate	410,000 ^b	930 ^d	410,000 ^b	930 ^d	930 ^d	930 ^d	*
86-74-8	Carbazole	290 ^e	c	6,200 ^e	^c	0.6 ^e	2.8	NA

F

		Expo					Soil Component of the Groundwater Ingestion Exposure Route	
			Industrial- Commercial		Construction Worker		Values	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)		
1563-66-2	Carbofuran°	10,000 ^b	^c	1,000 ^b	^c	0.22	1.1	NA
75-15-0	Carbon disulfide	200,000 ^b	720 ^d	20,000 ^b	9.0 ^b	32 ^b	160	*
56-23-5	Carbon tetrachloride	44 ^e	0.64 ^e	410 ^b	0.90 ^e	0.07	0.33	*
57-74-9	Chlordane	4 ^e	38 ^e	12 ^b	53 ^e	10	48	*
106-47-8	4 - Chloroaniline (p-Chloroaniline)	8,200 ^b	c	820 ^b	c	0.7 ^b	0.7	1.3
108-90-7	Chlorobenzene (Monochlorobenzene)	41,000 ^b	210 ^b	4,100 ^b	1.3 ^b	1	6.5	*
124-48-1	Chlorodibromomethane (Dibromochloromethane)	41,000 ^b	1,300 ^d	41,000 ^b	1,300 ^d	0.4	0.4	*
67-66-3	Chloroform	940 ^e	0.54 ^e	2,000 ^b	0.76 ^e	0.6	2.9	*
218-01-9	Chrysene	780 ^e	c	17,000 ^e	е	160	800	*
94-75-7	2,4-D	20,000 ^b	c	2,000 ^b	c	1.5	7.7	*

П

F

							Soil Component of the Groundwater Ingestion Exposure Route Values	
		Comi	Commercial		orker			
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
75-99-0	Dalapon	61,000 ^b	c	6,100 ^b	с	0.85	8.5	1.2
72-54-8	DDD	24 ^e	^c	520 ^e	^c	16 ^e	80	*
72-55-9	DDE	17 ^e	^c	370 ^e	^c	54 ^e	270	*
50-29-3	DDT	17 ^e	1,500 ^e	100 ^b	2,100 ^e	32 ^e	160	*
53-70-3	Dibenzo(a,h)anthracene	0.8 ^e	^c	17 ^e	^c	2	7.6	*
96-12-8	1,2-Dibromo-3-chloropropane	4 ^e	17 ^b	89 ^e	0.11 ^b	0.002	0.002	*
106-93-4	1,2-Dibromoethane (Ethylene dibromide)	0.07 ^e	0.32 ^e	1.5 ^e	0.45 ^e	0.0004	0.004	0.005
84-74-2	Di-n-butyl phthalate	200,000 ^b	2,300 ^d	200,000 ^b	2,300 ^d	2,300 ^d	2,300 ^d	*
95-50-1	1,2-Dichlorobenzene (o - Dichlorobenzene)	180,000 ^b	560 ^d	18,000 ^b	310 ^b	17	43	*
106-46-7	1,4-Dichlorobenzene (p - Dichlorobenzene)	c	17,000 ^b	^c	340 ^b	2	11	*

		Exposure Route-Specific Values for Soils Industrial- Construction			Soil Component of the Groundwater Ingestion Exposure Route Values				
		Comr	nercial	We	orker		T		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	(mg/kg) (mg/kg)		
91-94-1	3,3'-Dichlorobenzidine	13 ^e	^c	280 ^e	^c	0.007 ^{e,f}	0.033	1.3	
75-34-3	1,1-Dichloroethane	200,000 ^b	1,700 ^d	200,000 ^b	130 ^b	23 ^b	110	*	
107-06-2	1,2-Dichloroethane (Ethylene dichloride)	63 ^e	0.70 ^e	1,400 ^e	0.99 ^e	0.02	0.1	*	
75-35-4	1,1-Dichloroethylene	18,000 ^b	1,500 ^d	1,800 ^b	1,500 ^d	0.06	0.3	*	
156-59-2	cis-1,2-Dichloroethylene	20,000 ^b	1,200 ^d	20,000 ^b	1,200 ^d	0.4	1.1	*	
156-60-5	trans-1,2-Dichloroethylene	41,000 ^b	3,100 ^d	41,000 ^b	3,100 ^d	0.7	3.4	*	
78-87-5	1,2-Dichloropropane	84 ^e	23 ^b	1,800 ^e	0.50 ^b	0.03	0.15	*	
542-75-6	1,3-Dichloropropene (1,3-Dichloropropylene, <i>cis</i> + <i>trans</i>)	33 ^e	0.23 ^e	610 ^b	0.33 ^e	0.004 ^e	0.02	0.005	
60-57-1	Dieldrin ⁿ	0.4 ^e	2.2 ^e	7.8 ^e	3.1 ^e	0.004 ^e	0.02	0.0013	
84-66-2	Diethyl phthalate	1,000,000 ^b	2,000 ^d	1,000,000 ^b	2,000 ^d	470 ^b	470	*	

П

F

		Expos	t				Soil Component of the Groundwater Ingestion Exposure Route Values	
			Industrial- Construction Commercial Worker			Va	lues	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
105-67-9	2,4-Dimethylphenol	41,000 ^b	c	41,000 ^b	^c	9 ^b	9	*
121-14-2	2,4-Dinitrotoluene	8.4 ^e	c	180 ^e	c	0.0008 ^{e,f}	0.0008	0.013
606-20-2	2,6-Dinitrotoluene	8.4 ^e	^c	180 ^e	^c	0.0007 ^{e,f}	0.0007	0.0067
117-84-0	Di-n-octyl phthalate	41,000 ^e	10,000 ^d	4,100 ^b	10,000 ^d	10,000 ^d	10,000 ^d	*
115-29-7	Endosulfan	12,000 ^b	^c	1,200 ^b	^c	18 ^b	90	*
145-73-3	Endothall ^o	41,000°	^c	4,100 ^b	^c	0.4	0.4	NA
72-20-8	Endrin	610 ^b	^c	61 ^b	^c	1	5	*
100-41-4	Ethylbenzene	200,000 ^b	400 ^d	20,000 ^b	58 ^b	13	19	*
206-44-0	Fluoranthene	82,000 ^b	c	82,000 ^b	^c	4,300 ^b	21,000	*
86-73-7	Fluorene	82,000 ^b	c	82,000 ^b	^c	560 ^b	2,800	*
76-44-8	Heptachlor	1 ^e	11 ^e	28e	16 ^e	23	110	*

	Exposure Route-Specific Values for Soils Industrial Construction Commercial Worker			Soil Component of the Groundwater Ingestion Exposure Route Values					
		Com	mercial	We	orker				
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	(mg/kg) (mg/kg)		
1024-57-3	Heptachlor epoxide	0.6 ^e	9.2 ^e	2.7 ^b	13 ^e	0.7	3.3	*	
118-74-1	Hexachlorobenzene	4 ^e	1.8 ^e	78 ^e	2.6 ^e	2	*		
319-84-6	alpha-HCH (alpha-BHC)	0.9 ^e	1.5 ^e	20 ^e	2.1 ^e	0.0005 ^{e,f}	0.003	0.002	
58-89-9	gamma-HCH (Lindane) ⁿ	4 ^e	^c	96 ^e	^c	0.009	0.047	*	
77-47-4	Hexachlorocyclopentadiene	14,000 ^b	16 ^b	14,000 ^b	1.1 ^b	400	2,200 ^d	*	
67-72-1	Hexachloroethane	2,000 ^b	c	2,000 ^b	^c	0.5 ^b	2.6	*	
193-39-5	Indeno(1,2,3-c,d)pyrene	8 ^e	c	170 ^e	^c	14	69	*	
78-59-1	Isophorone	410,000 ^b	4,600 ^d	410,000 ^b	4,600 ^d	8 ^b	8	*	
72-43-5	Methoxychlor	10,000 ^b	c	1,000 ^b	c	160	780	*	
74-83-9	Methyl bromide (Bromomethane)	2,900 ^b	15 ^b	1,000 ^b	3.9 ^b	0.2 ^b	1.2	*	

		Expo	Exposure Route-Specific Values for Soils I					
			strial- nercial		truction orker	va	lues	
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
75-09-2	Methylene chloride (Dichloromethane)	760 ^e	24 ^e	12,000 ^b	34 ^e	0.02 ^e	0.2	*
95-48-7	2-Methylphenol (o - Cresol)	100,000 ^b	^c	100,000 ^b	c	15 ^b	*	
86-30-6	<i>N</i> -Nitrosodiphenylamine	1,200 ^e	с	25,000 ^e	с	1 ^e	5.6	0.66
621-64-7	N-Nitrosodi-n-propylamine	0.8 ^e	^c	18 ^e	^c	0.00005 ^{e,f}	0.00005	0.66
91-20-3	Naphthalene	82,000 ^b	c	8,200 ^b	^c	84 ^b	420	*
98-95-3	Nitrobenzene	1,000 ^b	140 ^b	1,000 ^b	9.4 ^b	0.1 ^{b,f}	0.1	0.26
108-95-2	Phenol	1,000,000 ^b	^c	120,000 ^b	^c	100 ^b	100	*
1918-02-1	Picloram ^o	140,000 ^b	^c	14,000 ^b	^c	2	20	NA
1336-36-3	Polychlorinated biphenyls (PCBs) ⁿ	1; 10; 25 ^h	c,h	1 ^h	c,h	h	^h	*
129-00-0	Pyrene	61,000 ^b	c	61,000 ^b	^c	4,200 ^b	21,000	*

				ecific Values f		the Gro Ingestion Ro	nponent of undwater Exposure oute lues		
			strial- nercial		truction orker		v artics		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)	
122-34-9	Simazine ^o	10,000 ^b	^c	1,000 ^b	^c	0.04	0.37	NA	
100-42-5	Styrene	410,000 ^b	1,500 ^d	41,000 ^b	430 ^b	4	18	*	
127-18-4	Tetrachloroethylene (Perchloroethylene)	110 ^e	20 ^e	2,400 ^e	28 ^e	0.06	0.3	*	
108-88-3	Toluene	410,000 ^b	650 ^d	410,000 ^b	42 ^b	12	29	*	
8001-35-2	Toxaphene ⁿ	5.2 ^e	170 ^e	110 ^e	240 ^e	31	150	*	
120-82-1	1,2,4-Trichlorobenzene	20,000 ^b	3,200 ^d	2,000 ^b	920 ^b	5	53	*	
71-55-6	1,1,1-Trichloroethane	c	1,200 ^d	c	1,200 ^d	2	9.6	*	
79-00-5	1,1,2-Trichloroethane	8,200 ^b	1,800 ^d	8,200 ^b	1,800 ^d	0.02	0.3	*	
79-01-6	Trichloroethylene	520 ^e	8.9 ^e	1,200 ^b	12 ^e	0.06	0.3	*	
108-05-4	Vinyl acetate	1,000,000 ^b	1,600 ^b	200,000 ^b	10 ^b	170 ^b	170	*	

		Exposure Route-Specific Values for Soils Industrial- Construction Commercial Worker				Soil Component of the Groundwater Ingestion Exposure Route Values		
CAS No. Chemical Name		Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
75-01-4	Vinyl chloride	3 ^e	0.06 ^e	65 ^e	0.08 ^e	0.01 ^f	0.07	*
108-38-3	m-Xylene	1,000,000	420 ^d	410,000 ^b	420 ^d	210	210	*
95-47-6	o-Xylene	1,000,000	410 ^d	410,000 ^b	410 ^d	190	190	*
106-42-3	p-Xylene	1,000,000	460 ^d	410,000 ^b	460 ^d	200	200	*
1330-20-7	Xylenes (total)	1,000,000 ^b	410 ^d	410,000 ^b	410 ^d	150	150	*
	Ionizable Organics							
65-85-0	Benzoic Acid	1,000,000 ^b	^c	820,000 ^b	^c	400 ^{b,i}	400 ⁱ	*
95-57-8	2-Chlorophenol	10,000 ^b	53,000 ^d	10,000 ^b	53,000 ^d	4 ^{b,i}	20 ⁱ	*
120-83-2	2,4-Dichlorophenol	6,100 ^b	c	610 ^b	^c	1 ^{b,i}	1 ⁱ	*
51-28-5	2,4-Dinitrophenol	4,100 ^b	^c	410 ^b	^c	0.2 ^{b,f,i}	0.2 ⁱ	3.3
88-85-7	Dinoseb ^o	2,000 ^b	с	200 ^b	с	0.34 ^{b,i}	3.4 ⁱ	*

		Expos	Exposure Route-Specific Values for Soils Soil Component of the Groundwater Ingestion Exposure Route					
			strial- nercial		truction orker	Values		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/kg)	Class II (mg/kg)	ADL (mg/kg)
87-86-5	Pentachlorophenol	24 ^{e,j}	^c	520 ^{e,j}	c	0.03 ^{f,i}	0.14 ⁱ	2.4
93-72-1	2,4,5-TP (Silvex)	16,000 ^b	c	1,600 ^b	c	11 ⁱ	55 ⁱ	*
95-95-4	2,4,5-Trichlorophenol	200,000 ^b	^c	200,000 ^b	c	270 ^{b,i}	1,400 ⁱ	*
88-06-2	2,4,6- Trichlorophenol	520 ^e	390 ^e	11,000 ^e	540 ^e	0.2 ^{e,f,i}	0.77 ⁱ	0.43

		Exposure Route-Specific Values for Soils Soil Comporthe Ground Ingestion Ex Route					oundwater n Exposure coute	
			strial- nercial			Values		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/L)	Class II (mg/L)	
	Inorganics							
7440-36-0	Antimony	820 ^b	^c	82 ^b	^c	0.006 ^m	0.024 ^m	*
7440-38-2	Arsenic ^{l,n}	3 ^{e,t}	1,200 ^e	61 ^b	25,000 ^e	0.05 ^m	0.2 ^m	
7440-39-3	Barium	140,000 ^b	910,000 ^b	14,000 ^b	870,000 ^b	2.0 ^m	2.0 ^m	*
7440-41-7	Beryllium	1 ^{e,t}	2,100 ^e	29 ^e	44,000 ^e	0.004 ^m	0.5 ^m	*
7440-42-8	Boron	180,000 ^b	1,000,000	18,000 ^b	1,000,000	2.0 ^m	2.0 ^m	*
7440-43-9	Cadmium ^{l,n}	2,000 ^{b,r}	2,800 ^e	200 ^{b,r}	59,000 ^e	0.005 ^m	0.05 ^m	*
16887-00-6	Chloride	c	c	^c	^c	200 ^m	200 ^m	*
7440-47-3	Chromium, total	10,000 ^b	420 ^e	4,100 ^b	8,800 ^e	0.1 ^m	1.0 ^m	*
16065-83-1	Chromium, ion, trivalent	1,000,000 ^b	c	330,000 ^b	^c	^g	^g	*
18540-29-9	Chromium, ion, hexavalent	10,000 ^b	420 ^e	4,100 ^b	8,800 ^e			*

		Expos	Exposure Route-Specific Values for Soils Soil Componer the Groundwa Ingestion Expo					
			strial- nercial		ruction rker	Values		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/L)	Class II (mg/L)	
7440-48-4	Cobalt	120,000 ^b	c	12,000 ^b	c	1.0 ^m	1.0 ^m	*
7440-50-8	Copper ⁿ	82,000 ^b	c	8,200 ^b	c	0.65 ^m	0.65 ^m	*
57-12-5	Cyanide (amenable)	41,000 ^b	^c	4,100 ^b	^c	0.2 ^q	0.6 ^q	*
7782-41-4	Fluoride	120,000 ^b	c	12,000 ^b	c	4.0 ^m	4.0 ^m	*
15438-31-0	Iron	^c	c	c	c	5.0 ^m	5.0 ^m	*
7439-92-1	Lead	400 ^k	c	400 ^k	c	0.0075 ^m	0.1 ^m	*
7439-96-5	Manganese	96,000 ^b	91,000 ^b	9,600 ^b	8,700 ^b	0.15 ^m	10.0 ^m	*
7439-97-6	Mercury ^{l,n}	610 ^b	540,000 ^b	61 ^{b,s}	52,000 ^b	0.002 ^m	0.01 ^m	*
7440-02-0	Nickel ^l	41,000 ^b	21,000 ^e	4,100 ^b	440,000 ^e	0.1 ^m	2.0 ^m	*
14797-55-8	Nitrate as N ^p	1,000,000 ^b	c	330,000 ^b	c	10.0 ^q	100 ^q	*
7782-49-2	Selenium ^{l,n}	10,000 ^b	c	1,000 ^b	c	0.05 ^m	0.05 ^m	*

		Expos	Soil Component of the Groundwater Ingestion Exposure Route					
		Indus Comn	strial- nercial		ruction rker	Va		
CAS No.	Chemical Name	Ingestion (mg/kg)	Inhalation (mg/kg)	Ingestion (mg/kg)	Inhalation (mg/kg)	Class I (mg/L)	Class II (mg/L)	
7440-22-4	Silver	10,000 ^b	^c	1,000 ^b	c	0.05 ^m		*
14808-79-8	Sulfate	^c	^c	c	^c	400 ^m	400 ^m	*
7440-28-0	Thallium	160 ^{b,u}	c	160 ^{b,u}	c	0.002 ^m	0.02 ^m	*
7440-62-2	Vanadium	14,000 ^b	c	1,400 ^b	^c	0.049 ^m		*
7440-66-6	Zinc ¹	610,000 ^b	^c	61,000 ^b	^c	5.0 ^m	10 ^m	*

[&]quot;*" indicates that the ADL is less than or equal to the specified remediation objective. NA means Not Available; no PQL or EQL available in USEPA analytical methods.

Chemical Name and Soil Remediation Objective Notations (2nd, 5th thru 8th Columns)

- ^a Soil remediation objectives based on human health criteria only.
- b Calculated values correspond to a target hazard quotient of 1.
- No toxicity criteria available for this route of exposure.
- Soil saturation concentration (C_{sat})= the concentration at which the absorptive limits of the soil particles, the solubility limits of the available soil moisture, and saturation of soil pore air have been reached. Above the soil saturation concentration, the assumptions regarding vapor transport to air and/or dissolved phase transport to groundwater (for chemicals which are liquid at ambient soil temperatures) have been violated, and alternative modeling approaches are required.
- ^e Calculated values correspond to a cancer risk level of 1 in 1,000,000.
- f Level is at or below Contract Laboratory Program required quantitation limit for Regular Analytical Services (RAS).
- g Chemical-specific properties are such that this route is not of concern at any soil contaminant concentration.
- A preliminary goal of 1 ppm has been set for PCBs based on *Guidance on Remedial Actions for Superfund Sites with PCB Contamination*, EPA/540G-90/007, and on USEPA efforts to manage PCB contamination. See 40 CFR 761.120 for USEPA "PCB Spill Cleanup Policy." This regulation goes on to say that the remediation goal for an unrestricted area is 10 ppm and 25 ppm for a restricted area, provided both have at least 10 inches of clean cover.
- Soil remediation objective for pH of 6.8. If soil pH is other than 6.8, refer to Appendix B, Tables C and D in this Part.
- Ingestion soil remediation objective adjusted by a factor of 0.5 to account for dermal route.
- A preliminary remediation goal of 400 mg/kg has been set for lead based on *Revised Interim Soil Lead Guidance for CERCLA Sites and RCRA Corrective Action Facilities*, OSWER Directive #9355.4-12.
- Potential for soil-plant-human exposure.
- The person conducting the remediation has the option to use: (1) TCLP or SPLP test results to compare with the remediation objectives listed in this Table; or (2) the total amount of contaminant in the soil sample results to compare with pH specific remediation objectives listed in Appendix B, Table C or D of this Part. (See Section 742.510.) If the person conducting the remediation wishes to calculate soil remediation objectives based on background concentrations, this should be done in accordance with Subpart D of this Part.
- The Agency reserves the right to evaluate the potential for remaining contaminant concentrations to pose significant threats to crops, livestock, or wildlife.
- For agrichemical facilities, remediation objectives for surficial soils which are based on field application rates may be more appropriate for currently registered pesticides. Consult the Agency for further information.
- For agrichemical facilities, soil remediation objectives based on site-specific background concentrations of Nitrate as N may be more appropriate. Such determinations shall be conducted in accordance with the located in Subparts D and I of this Part.
- The TCLP extraction must be done using water at a pH of 7.0.
- r Value based on dietary Reference Dose.
- s Value based on Reference Dose for Mercuric chloride (CAS No. 7487-94-7).
- t Note that Table value is likely to be less than background concentration for this chemical; screening or remediation concentrations using the procedures of Subpart D of this Part.
- ^u Value based on Reference Dose for thallium sulfate (CAS No. 7446-18-6).

Section 742.APPENDIX B: Tier 1 Tables and Illustrations

Section 742.Table C: pH Specific Soil Remediation Objectives for Inorganics and Ionizing Organics for the Soil Component of the Groundwater Ingestion Route (Class I Groundwater)

Chemical (totals) (mg/kg)	pH 4.5 to 4.74	pH 4.75 to 5.24	pH 5.25 to 5.74	pH 5.75 to 6.24	pH 6.25 to 6.64	pH 6.65 to 6.89	pH 6.9 to 7.24	pH 7.25 to 7.74	pH 7.75 to 8.0
Inorganics									
Antimony	5	5	5	5	5	5	5	5	5
Arsenic	25	26	27	28	29	29	29	30	31
Barium	260	490	850	1,200	1,500	1,600	1,700	1,800	2,100
Beryllium	1.1	2.1	3.4	6.6	22	63	140	1,000	8,000
Cadmium	1.0	1.7	2.7	3.7	5.2	7.5	11	59	430
Chromium (+6)	70	62	54	46	40	38	36	32	28
Copper	330	580	2,100	11,000	59,000	130,000	200,000	330,000	330,000
Cyanide	40	40	40	40	40	40	40	40	40
Mercury	0.01	0.01`	0.03	0.15	0.89	2.1	3.3	6.4	8.0
Nickel	20	36	56	76	100	130	180	700	3,800
Selenium	24	17	12	8.8	6.3	5.2	4.5	3.3	2.4
Silver	0.24	0.33	0.62	1.5	4.4	8.5	13	39	110

Chemical (totals) (mg/kg)	pH 4.5 to 4.74	pH 4.75 to 5.24	pH 5.25 to 5.74	pH 5.75 to 6.24	pH 6.25 to 6.64	pH 6.65 to 6.89	pH 6.9 to 7.24	pH 7.25 to 7.74	pH 7.75 to 8.0
Thallium	1.6	1.8	2.0	2.4	2.6	2.8	3.0	3.4	3.8
Vanadium	980	980	980	980	980	980	980	980	980
Zinc	1,000	1,800	2,600	3,600	5,100	6,200	7,500	16,000	53,000
Organics									
Benzoic Acid	440	420	410	400	400	400	400	400	400
2-Chlorophenol	4.0	4.0	4.0	4.0	3.9	3.9	3.9	3.6	3.1
2,4- Dichlorophenol	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.86	0.69
Dinoseb	8.4	4.5	1.9	0.82	0.43	0.34	0.31	0.27	0.25
Pentachlorophenol	0.54	0.32	0.15	0.07	0.04	0.03	0.02	0.02	0.02
2,4,5-TP (Silvex)	26	16	12	11	11	11	11	11	11
2,4,5- Trichlorophenol	400	390	390	370	320	270	230	130	64
2,4,6- Trichlorophenol	0.37	0.36	0.34	0.26	0.20	0.15	0.13	0.09	0.07

Section 742.APPENDIX B

Section 742.Table D: pH Specific Soil Remediation Objectives for Inorganics and Ionizing Organics for the Soil Component of the Groundwater Ingestion Route (Class II Groundwater)

Chemical (totals) (mg/kg)	pH 4.5 to 4.74	pH 4.75 to 5.24	pH 5.25 to 5.74	pH 5.75 to 6.24	pH 6.25 to 6.64	pH 6.65 to 6.89	pH 6.9 to 7.24	pH 7.25 to 7.74	pH 7.75 to 8.0
Inorganics									
Antimony	20	20	20	20	20	20	20	20	20
Arsenic	100	100	100	110	110	120	120	120	120
Barium	260	490	850	1,200	1,500	1,600	1,700	1,800	2,100
Beryllium	140	260	420	820	2,800	7,900	17,000	130,000	1,000,000
Cadmium	10	17	27	37	52	75	110	590	4,300
Chromium (+6)	No Data	No Data	No Data	No Data	No Data	No Data	No Data	No Data	No Data
Copper	330	580	2,100	11,000	59,000	130,000	200,000	330,000	330,000
Cyanide	120	120	120	120	120	120	120	120	120
Mercury	0.05	0.06	0.14	0.75	4.4	10	16	32	40
Nickel	400	730	1,100	1,500	2,000	2,600	3,500	14,000	76,000
Selenium	24	17	12	8.8	6.3	5.2	4.5	3.3	2.4
Thallium	16	18	20	24	26	28	30	34	38
Zinc	2,000	3,600	5,200	7,200	10,000	12,000	15,000	32,000	110,000

Chemical (totals) (mg/kg)	pH 4.5 to 4.74	pH 4.75 to 5.24	pH 5.25 to 5.74	pH 5.75 to 6.24	pH 6.25 to 6.64	pH 6.65 to 6.89	pH 6.9 to 7.24	pH 7.25 to 7.74	pH 7.75 to 8.0
Organics									
Benzoic Acid	440	420	410	400	400	400	400	400	400
2-Chlorophenol	20	20	20	20	20	20	19	3.6	3.1
2,4- Dichlorophenol	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.86	0.69
Dinoseb	84	45	19	8.2	4.3	3.4	3.1	2.7	2.5
Pentachlorophenol	2.7	1.6	0.75	0.33	0.18	0.15	0.12	0.11	0.10
2,4,5-TP (Silvex)	130	79	62	57	55	55	55	55	55
2,4,5- Trichlorophenol	2,000	2,000	1,900	1,800	1,600	1,400	1,200	640	64
2,4,6- Trichlorophenol	0.37	0.36	0.34	0.26	0.20	0.15	0.13	0.09	0.07

Section 742.APPENDIX B: Tier 1 Tables and Illustrations

Section 742.TABLE E: Tier 1 Groundwater Remediation Objectives for the Groundwater Component of the Groundwater Ingestion Route

		Groundwater Remediation Objective		
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)	
83-32-9	Acenaphthene	0.42	2.1	
67-64-1	Acetone	0.7	0.7	
15972-60-8	Alachlor	0.002°	0.01°	
116-06-3	Aldicarb	0.003°	0.015°	
309-00-2	Aldrin	0.00004	0.0002	
120-12-7	Anthracene	2.1	10.5	
1912-24-9	Atrazine	0.003°	0.015°	
71-43-2	Benzene	0.005°	0.025°	
56-55-3	Benzo(a)anthracene	0.00013ª	0.00065	
205-99-2	Benzo(b)fluoranthene	0.00018	0.0009	
207-08-9	Benzo(k)fluroanthene	0.00017	0.00085	
50-32-8	Benzo(a)pyrene	0.0002 ^{a,c}	0.002°	
111-44-4	Bis(2-chloroethyl)ether	0.01ª	0.01	
117-81-7	Bis(2-ethylhexyl)phthalate	0.006 ^{a,c}	0.06°	
75-27-4	Bromodichloromethane (Dichlorobromomethane)	0.00002ª	0.00002	
75-25-2	Bromoform	0.0002ª	0.0002	
71-36-3	Butanol	0.7	0.7	
85-68-7	Butyl benzyl phthalate	1.4	7.0	
86-74-8	Carbazole			
1563-66-2	Carbofuran	0.04°	0.2°	
75-15-0	Carbon disulfide	0.7	3.5	
56-23-5	Carbon tetrachloride	0.005°	0.025°	
57-74-9	Chlordane	0.002°	0.01°	

		Groundwater Remediation Objective		
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)	
108-90-7	Chlorobenzene (Monochlorobenzene)	0.1°	0.5°	
124-48-1	Chlorodibromomethane (Dibromochloromethane)	0.14	0.14	
67-66-3	Chloroform	0.00002ª	0.0001	
218-01-9	Chrysene	0.0015 ^a	0.0075	
94-75-7	2,4-D	0.07°	0.35°	
75-99-0	Dalapon	0.2°	2.0°	
72-54-8	DDD	0.00011ª	0.00055	
72-55-9	DDE	0.00004ª	0.0002	
50-29-3	DDT	0.00012ª	0.0006	
53-70-3	Dibenzo(a,h)anthracene	0.0003 ^a	0.0015	
96-12-8	1,2-Dibromo-3- chloropropane	0.0002°	0.0002°	
106-93-4	1,2-Dibromoethane (Ethylene dibromide)	0.00005 ^{a,c}	0.0005°	
84-74-2	Di-n-butyl phthalate	0.7	3.5	
95-50-1	1,2-Dichlorobenzene (o - Dichlorobenzene)	0.6°	1.5°	
106-46-7	1,4-Dichlorobenzene (p - Dichlorobenzene)	0.075°	0.375°	
91-94-1	3,3'-Dichlorobenzidine	0.02ª	0.1	
75-34-3	1,1-Dichloroethane	0.7	3.5	
107-06-2	1,2-Dichloroethane (Ethylene dichloride)	0.005°	0.025°	
75-35-4	1,1-Dichloroethylene ^b	0.007°	0.035°	
156-59-2	cis-1,2-Dichloroethylene	0.07°	0.2°	
156-60-5	trans-1,2-Dichloroethylene	0.1°	0.5°	
78-87-5	1,2-Dichloropropane	0.005°	0.025°	
542-75-6	1,3-Dichloropropene (1,3-Dichloropropylene,	0.001	0.005	

cis + trans)

Groundwater	Remediation	Objective
-------------	-------------	-----------

		1	
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)
60-57-1	Dieldrin	0.00002	0.0001
84-66-2	Diethyl phthalate	5.6	5.6
121-14-2	2,4-Dinitrotoluene ^a	0.00002	0.00002
606-20-2	2,6-Dinitrotoluene ^a	0.0001	0.0001
88-85-7	Dinoseb	0.007°	0.07°
117-84-0	Di-n-octyl phthalate	0.14	0.7
115-29-7	Endosulfan	0.042	0.21
145-73-3	Endothall	0.1°	0.1°
72-20-8	Endrin	0.002°	0.01°
100-41-4	Ethylbenzene	0.7°	1.0°
206-44-0	Fluoranthene	0.28	1.4
86-73-7	Fluorene	0.28	1.4
76-44-8	Heptachlor	0.0004°	0.002°
1024-57-3	Heptachlor epoxide	0.0002°	0.001°
118-74-1	Hexachlorobenzene	0.00006ª	0.0003
319-84-6	alpha-HCH (alpha-BHC)	0.00003ª	0.00015
58-89-9	gamma-HCH (Lindane)	0.0002°	0.001°
77-47-4	Hexachlorocyclopentadiene	0.05°	0.5°
67-72-1	Hexachloroethane	0.007	0.035
193-39-5	Indeno(1,2,3- c , d)pyrene	0.00043ª	0.00215
78-59-1	Isophorone	1.4	1.4
72-43-5	Methoxychlor	0.04°	0.2°
74-83-9	Methyl bromide (Bromomethane)	0.0098	0.049
75-09-2	Methylene chloride (Dichloromethane)	0.005°	0.05°
91-20-3	Naphthalene ²	0.025	0.039
98-95-3	Nitrobenzene ²	0.0035	0.0035

Groundwater	Remediation	Objective
-------------	-------------	-----------

CAS No.	Chemical Name	Class I	Class II
		(mg/L)	(mg/L)
1918-02-1	Picloram	0.5°	5.0°
1336-36-3	Polychlorinated biphenyls (PCBs) ⁿ	0.0005°	0.0025°
129-00-0	Pyrene	0.21	1.05
122-34-9	Simazine	0.004°	0.04°
100-42-5	Styrene	0.1°	0.5°
93-72-1	2,4,5-TP (Silvex)	0.05°	0.25°
127-18-4	Tetrachloroethylene (Perchloroethylene)	0.005°	0.025°
108-88-3	Toluene	1.0°	2.5°
8001-35-2	Toxaphene	0.003°	0.015°
120-82-1	1,2,4-Trichlorobenzene	0.07°	0.7°
71-55-6	1,1,1-Trichloroethane ²	0.2°	1.0°
79-00-5	1,1,2-Trichloroethane	0.005°	0.05°
79-01-6	Trichloroethylene	0.005°	0.025°
108-05-4	Vinyl acetate	7.0	7.0
75-01-4	Vinyl chloride	0.002°	0.01°
1330-20-7	Xylenes (total)	10.0°	10.0°
	Ionizable Organics		
65-85-0	Benzoic Acid	28	28
106-47-8	4-Chloroaniline (p-Chloroaniline)	0.028	0.028
95-57-8	2-Chlorophenol	0.035	0.175
120-83-2	2,4-Dichlorophenol	0.021	0.021
105-67-9	2,4-Dimethylphenol	0.14	0.14
51-28-5	2,4-Dinitrophenol	0.014	0.014
95-48-7	2-Methylphenol (o - Cresol)	0.35	0.35
86-30-6	<i>N</i> -Nitrosodiphenylamine	0.01 a	0.05

Groundwater	Remediation	Objective
-------------	-------------	-----------

CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)
621-64-7	<i>N</i> -Nitrosodi- <i>n</i> -propylamine	0.01°	0.01
87-86-5	Pentachlorophenol	0.001 ^{a,c}	0.005°
108-95-2	Phenol	0.1°	0.1°
95-95-4	2,4,5-Trichlorophenol	0.7	3.5
88-06-2	2,4,6 Trichlorophenol	0.0064ª	0.032
	Inorganics		
7440-36-0	Antimony	0.006°	0.024°
7440-38-2	Arsenic	0.05°	0.2°
7440-39-3	Barium	2.0°	2.0°
7440-41-7	Beryllium	0.004°	0.5°
7440-42-8	Boron	2.0°	2.0°
7440-43-9	Cadmium	0.005°	0.05°
16887-00-6	Chloride	200°	200°
7440-47-3	Chromium, total	0.1°	1.0°
18540-29-9	Chromium, ion, hexavalent		
7440-48-4	Cobalt	1.0°	1.0°
7440-50-8	Copper	0.65°	0.65°
57-12-5	Cyanide	0.2°	0.6°
7782-41-4	Fluoride	4.0°	4.0°
15438-31-0	Iron	5.0°	5.0°
7439-92-1	Lead	0.0075°	0.1°
7439-96-5	Manganese	0.15°	10.0°
7439-97-6	Mercury	0.002°	0.01°
7440-02-0	Nickel	0.1°	2.0°
14797-55-8	Nitrate as N	10.0°	100°
7782-49-2	Selenium	0.05°	0.05°
7440-22-4	Silver	0.05°	
14808-79-8	Sulfate	400°	400°

		Groundwater Remediation Objective		
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)	
7440-28-0	Thallium	0.002°	0.02°	
7440-62-2	Vanadium ²	0.049		
7440-66-6	Zinc	5.0°	10°	

Chemical Name and Groundwater Remediation Objective Notations

- ^a The groundwater Health Advisory concentration is equal to ADL for carcinogens.
- Oral Reference Dose and/or Reference Concentration under review by USEPA. Listed values subject to change.
- Value listed is also the Groundwater Quality Standard for this chemical pursuant to 35 Ill. Adm. Code 620.410 for Class I Groundwater or 35 Ill. Adm. Code 620.420 for Class II Groundwater.

Section 742.APPENDIX B: Tier 1 Tables and Illustrations

Section 742.TABLE F: Values Used to Calculate the Tier 1 Soil
Remediation Objectives for the Soil Component of
the Groundwater Ingestion Route

	=		
		GW _{obj} Concentration used to Calculate Tier 1 Soil Rememdiation Objectives ^a	
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)
83-32-9	Acenaphthene	2.0 ^b	10
67-64-1	Acetone	4.0 ^b	4.0
15972-60-8	Alachlor	0.002°	0.01°
116-06-3	Aldicarb	0.003°	0.015°
309-00-2	Aldrin	5.0E-6 ^b	2.5E-5
120-12-7	Anthracene	10 ^b	50
1912-24-9	Atrazine	0.003°	0.015°
71-43-2	Benzene	0.005°	0.025°
56-55-3	Benzo(a)anthracene	0.0001 ^b	0.0005
205-99-2	Benzo(b)fluoranthene	0.0001 ^b	0.0005
207-08-9	Benzo(k)fluroanthene	0.001	0.005
50-32-8	Benzo(a)pyrene	0.0002 ^{a,c}	0.002°
111-44-4	Bis(2-chloroethyl)ether	8.0E-5 ^b	8.0E-5
117-81-7	Bis(2- ethylhexyl)phthalate	0.006 4,0	0.06°
75-27-4	Bromodichloromethane (Dichlorobromomethane)	0.1	0.1
75-25-2	Bromoform	0.1	0.01
71-36-3	Butanol	4.0 ^b	4.0
85-68-7	Butyl benzyl phthalate	7.0 ^b	35
86-74-8	Carbazole	0.004	0.02
1563-66-2	Carbofuran	0.04°	0.2°
75-15-0	Carbon disulfide	4.0 ^b	20
56-23-5	Carbon tetrachloride	0.005°	0.025°
57-74-9	Chlordane	0.002°	0.01°

GW_{obj} Concentration used to Calculate Tier 1 Soil Rememdiation Objectives^a

1		00)00	
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)
108-90-7	Chlorobenzene (Monochlorobenzene)	0.1°	0.5°
124-48-1	Chlorodibromomethane (Dibromochloromethane)	0.06	0.06
67-66-3	Chloroform	0.1 ^b	0.5
218-01-9	Chrysene	0.1 ^b	0.05
94-75-7	2,4-D	0.07°	0.35°
75-99-0	Dalapon	0.2°	2.0°
72-54-8	DDD	0.0004 ^b	0.002
72-55-9	DDE	0.0003 ^b	0.0015
50-29-3	DDT	0.0003 ^b	0.0015
53-70-3	Dibenzo(a,h)anthracene	1.0E-5 ^b	5.0E-5
96-12-8	1,2-Dibromo-3- chloropropane	0.0002°	0.0002°
106-93-4	1,2-Dibromoethane (Ethylene dibromide)	0.00005 ^{a,c}	0.0005°
84-74-2	Di-n-butyl phthalate	4.0°	20
95-50-1	1,2-Dichlorobenzene (o - Dichlorobenzene)	0.6°	1.5°
106-46-7	1,4-Dichlorobenzene (p - Dichlorobenzene)	0.075°	0.375°
91-94-1	3,3'-Dichlorobenzidine	0.0002 ^b	0.001
75-34-3	1,1-Dichloroethane	4.0°	20
107-06-2	1,2-Dichloroethane (Ethylene dichloride)	0.005°	0.025°
75-35-4	1,1-Dichloroethylene	0.007°	0.035°
156-59-2	cis-1,2- Dichloroethylene	0.07°	0.2°
156-60-5	trans-1,2- Dichloroethylene	0.1°	0.5°
78-97-5	1,2-Dichloropropane	0.005°	0.025°

542-75-6	1,3-Dichloropropene	0.0005 ^b	0.0025
	(1,3-Dichloropropylene,		
	cis + trans)		

GW_{obj} Concentration used to Calculate Tier 1 Soil Rememdiation Objectives^a

1		Object	71162
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)
60-57-1	Dieldrin	5.0E-6 ^b	2.5E-5
84-66-2	Diethyl phthalate	30 ^b	30
121-14-2	2,4-Dinitrotoluene	0.0001	0.0001
606-20-2	2,6-Dinitrotoluene	0.0001	0.0001
88-85-7	Dinoseb	0.007°	0.07°
117-84-0	Di-n-octyl phthalate	0.7 ^b	3.5
115-29-7	Endosulfan	0.2 ^b	1.0
145-73-3	Endothall	0.1°	0.1°
72-20-8	Endrin	0.002°	0.01°
100-41-4	Ethylbenzene	0.7°	1.0°
206-44-0	Fluoranthene	1.0 ^b	5.0
86-73-7	Fluorene	1.0 ^b	5.0
76-44-8	Heptachlor	0.0004°	0.002°
1024-57-3	Heptachlor epoxide	0.0002°	0.001°
118-74-1	Hexachlorobenzene	0.001 ^b	0.005
319-84-6	alpha-HCH (alpha-BHC)	1.0E-5 ^b	5.0E-5
58-89-9	gamma-HCH (Lindane)	0.0002°	0.001°
77-47-4	Hexachlorocyclopentadie ne	0.05°	0.5°
67-72-1	Hexachloroethane	0.007	0.035
193-39-5	Indeno(1,2,3- c , d)pyrene	0.0001	0.0005
78-59-1	Isophorone	1.4	1.4
72-43-5	Methoxychlor	0.04°	0.2°
74-83-9	Methyl bromide (Bromomethane)	0.05 ^b	0.25
75-09-2	Methylene chloride (Dichloromethane)	0.005°	0.05°
91-20-3	Naphthalene	1.0 ^b	5.0
98-95-3	Nitrobenzene	0.02 ^b	0.02

GW_{obj} Concentration used to Calculate Tier 1 Soil Rememdiation Objectives^a

i 	1	Jeco	ctives
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)
1918-02-1	Picloram	0.5°	5.0°
1336-36-3	Polychlorinated biphenyls (PCBs)		
129-00-0	Pyrene	1.0 ^b	5.0
122-34-9	Simazine	0.004°	0.04°
100-42-5	Styrene	0.1°	0.5°
93-72-1	2,4,5-TP (Silvex)	0.05°	0.25°
127-18-4	Tetrachloroethylene (Perchloroethylene)	0.005°	0.025°
108-88-3	Toluene	1.0°	2.5°
8001-35-2	Toxaphene	0.003°	0.015°
120-82-1	1,2,4-Trichlorobenzene	0.07°	0.7°
71-55-6	1,1,1-Trichloroethane ²	0.2°	1.0°
79-00-5	1,1,2-Trichloroethane	0.005°	0.05°
79-01-6	Trichloroethylene	0.005°	0.025°
108-05-4	Vinyl acetate	40 ^b	40
75-01-4	Vinyl chloride	0.002°	0.01°
1330-20-7	Xylenes (total)	10.0°	10.0°
	Ionizable Organics		
65-85-0	Benzoic Acid	100 ^b	100
106-47-8	4-Chloroaniline (p-Chloroaniline)	0.1	0.1
95-57-8	2-Chlorophenol	0.2 ^b	1.0
120-83-2	2,4-Dichlorophenol	0.1 ^b	0.1
105-67-9	2,4-Dimethylphenol	0.7 ^b	0.7
51-28-5	2,4-Dinitrophenol	0.04 ^b	0.04
95-48-7	2-Methylphenol (o - Cresol)	2.0 ^b	2.0
86-30-6	N-Nitrosodiphenylamine	0.02 ^b	0.1

GW_{obj} Concentration used to Calculate Tier 1 Soil Rememdiation Objectives^a

		Objec	ctives
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)
621-64-7	<i>N</i> -Nitrosodi- <i>n</i> -propylamine	1.0E-5 ^b	1.0E-5
87-86-5	Pentachlorophenol	0.001 a,c	0.005°
108-95-2	Phenol	0.1°	0.1°
95-95-4	2,4,5-Trichlorophenol	4.0 ^b	20
88-06-2	2,4,6-Trichlorophenol	0.008	0.04
	Inorganics		
7440-36-0	Antimony	0.006°	0.024°
7440-38-2	Arsenic	0.05°	0.2°
7440-39-3	Barium	2.0°	2.0°
7440-41-7	Beryllium	0.004°	0.5°
7440-42-8	Boron	2.0°	2.0°
7440-43-9	Cadmium	0.005°	0.05°
16887-00-6	Chloride	200°	200°
7440-47-3	Chromium, total	0.1°	1.0°
18540-29-9	Chromium, ion, hexavalent		
7440-48-4	Cobalt	1.0°	1.0°
7440-50-8	Copper	0.65°	0.65°
57-12-5	Cyanide	0.2°	0.6°
7782-41-4	Fluoride	4.0°	4.0°
15438-31-0	Iron	5.0°	5.0°
7439-92-1	Lead	0.0075°	0.1°
7439-96-5	Manganese	0.15°	10.0°
7439-97-6	Mercury	0.002°	0.01°
7440-02-0	Nickel	0.1°	2.0°
14797-55-8	Nitrate as N	10.0°	100°
7782-49-2	Selenium	0.05°	0.05°
7440-22-4	Silver	0.05°	


14808-79-8 Sulfate

		GW _{obj} Concentration used to Calculate Tier 1 Soil Rememdiation Objectives ^a		
CAS No.	Chemical Name	Class I (mg/L)	Class II (mg/L)	
7440-28-0	Thallium	0.002°	0.02°	
7440-62-2	Vanadium	0.049		
7440-66-6	Zinc	5.0°	10°	


Chemical Name and Groundwater Remediation Objective Notations

- The Equation S17 is used to calculate the Soil Remediation Objective for the Soil Component of the Groundwater Ingestion Route; this equation requires calculation of the Target Soil Leachate Concentration (C_w) from Equation S18: C_w = DF x GW_{obj}.
- Value listed is the Water Health Based Limit (HBL) for this chemical from Soil Screening Guidance: User's Guide, incorporated by reference at Section 742.210; for carcinogens, the HBL is equal to a cancer risk of 1.0E-6, and for noncarcinogens is equal to a Hazard Quotient of 1.0. NOTE: These GW_{obj} concentrations are not equal to the Tier 1 Groundwater Remediation Objectives for the Direct Ingestion of Groundwater Component of the Groundwater Ingestion Route, listed in Section 742.Appendix B, Table E.
- Value listed is also the Groundwater Quality Standard for this chemical pursuant to 35 Ill. Adm. Code 620.410 for Class I Groundwater or 35 Ill. Adm. Code 620.420 for Class II Groundwater.

Section 742.APPENDIX C: Tier 2 Tables and Illustrations Section 742.Illustration A: Tier 2 Evaluation for Soil

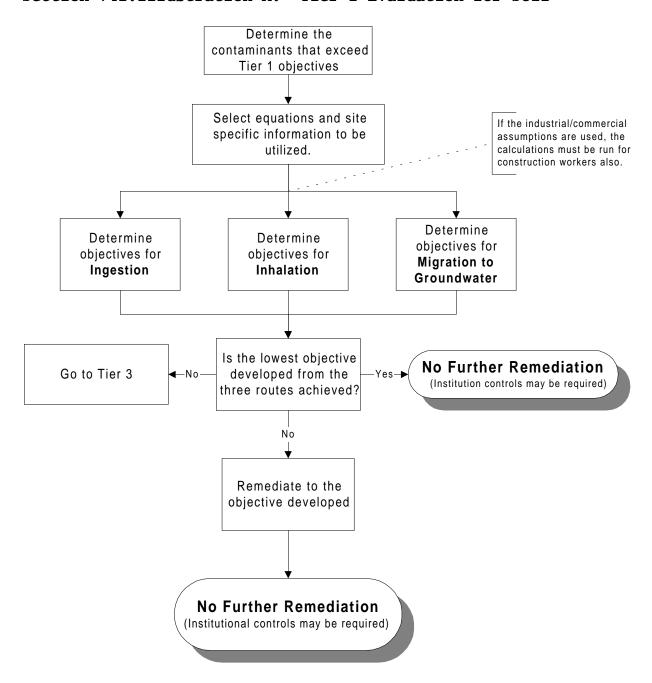


Section 742.APPENDIX C: Tier 2 Tables and Illustrations Section 742.Illustration B: Tier 2 Evaluation for Groundwater

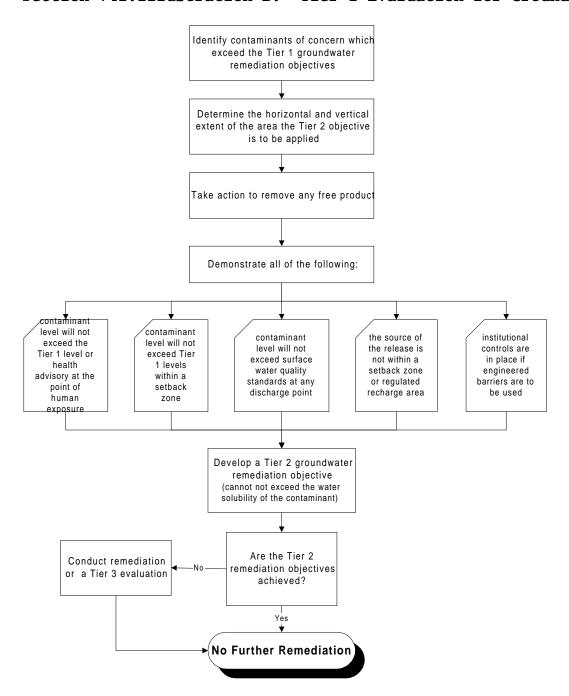

Section 742.APPENDIX C: Tier 2 Tables and Illustrations

Section 742.Illustration C: U.S. Department of Agriculture Soil Texture Classification

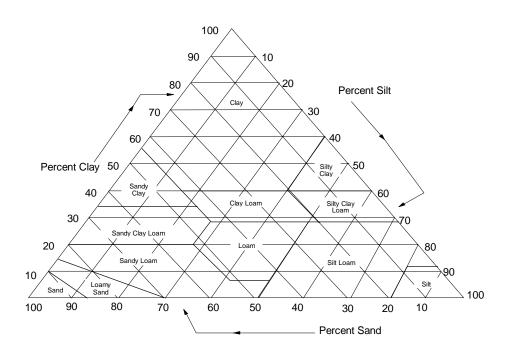

Criteria Used with the Field Method for Determining Soil Texture Classes

Criterion	Sand	Sandy loam	Loam	Slit loam	Clay loam	Clay
 Individual grains visible to eye 	Yes	Yes	Some	Few	No	No
 Stability of dry clods 	Do not form	Do not form	Easily broken	Moderately easily broken	Hard and stable	Very hard and stable
 Stability of wet clods 	Unstable	Slightyl stable	Moderately stable	Stable	Very stable	Very stable
Stability of "ribbon" when wet soil rubbed between thumb and fingers	Does not form	Does not form	Does not form	Broken appearance	Thin, will break	Very long, flexible

Particle Size, mm

0.00)2	0.05 0.	10	0.25	0.5	1.0	2.0
CI.	~	Very Fine	Fine	Med.	Coarse	Very Coarse	
Clay	Silt		Sand				Gravel

Section 742.APPENDIX C: Tier 2 Tables and Illustrations

Section 742.Table A: SSL Equations

Equations for Soil Ingestion Exposure Route	Remediation Objectives for Noncarcinogenic Contaminants (mg/kg)	$\frac{THQ \bullet BW \bullet AT \bullet 365 \frac{d}{yr}}{\frac{1}{RfD_o} \bullet 10^{-6} \frac{kg}{mg} \bullet EF \bullet ED \bullet IR_{soil}}$	S1
	Remediation Objectives for Carcinogenic Contaminants - Residential (mg/kg)	$\frac{TR \bullet AT_c \bullet 365 \frac{d}{yr}}{SF_o \bullet 10^{-6} \frac{kg}{mg} \bullet EF \bullet IF_{soil-adj}}$	S2
	Remediation Objectives for Carcinogenic Contaminants - Industrial/ Commercial, Construction Worker (mg/kg)	$\frac{TR \bullet BW \bullet AT_c \bullet 365 \frac{d}{yr}}{SF_o \bullet 10^{-6} \frac{kg}{mg} \bullet EF \bullet ED \bullet IR_{soil}}$	S 3
Equations for Inhalation Exposure Route (Volatiles)	Remediation Objectives for Noncarcinogenic Contaminants - Residential, Industrial/Commercial (mg/kg)	$\frac{THQ \bullet AT \bullet 365 \frac{d}{yr}}{EF \bullet ED \bullet \left(\frac{1}{RfC} \bullet \frac{1}{VF}\right)}$	S4

Remediation Objectives for Noncarcinogenic Contaminants - Construction Worker (mg/kg)	$\frac{THQ \bullet AT \bullet 365 \frac{d}{yr}}{EF \bullet ED \bullet \left(\frac{1}{RfC} \bullet \frac{1}{VF'}\right)}$	S5
Remediation Objectives for Carcinogenic Contaminants - Residential, Industrial/ Commercial (mg/kg)	$\frac{TR \bullet AT_c \bullet 365 \frac{d}{yr}}{URF \bullet 1,000 \frac{ug}{mg} \bullet EF \bullet ED \bullet \frac{1}{VF}}$	S6
Remediation Objectives for Carcinogenic Contaminants - Construction Worker (mg/kg)	$\frac{TR \bullet AT_c \bullet 365 \frac{d}{yr}}{URF \bullet 1,000 \frac{ug}{mg} \bullet EF \bullet ED \bullet \frac{1}{VF'}}$	S7
Equation for Derivation of the Volatilization Factor - Residential, Industrial/ Commercial, VF (m³/kg)	$VF = \frac{Q}{C} \bullet \frac{\left(3.14 \bullet D_A \bullet T\right)^{1/2}}{\left(2 \bullet \rho_b \bullet D_A\right)} \bullet 10^{-4} \frac{m^2}{cm^2}$	S8
Equation for Derivation of the Volatilization Factor - Construction Worker, VF' (m³/kg)	$VF' = \frac{VF}{10}$	S9
Equation for Derivation of Apparent Diffusivity, D _A (cm ² /s)	$D_{A} = \frac{\left(\theta_{a}^{3.33} \bullet D_{i} \bullet H'\right) + \left(\theta_{w}^{3.33} \bullet D_{w}\right)}{\eta^{2}} \bullet \frac{1}{\left(\rho_{b} \bullet K_{d}\right) + \theta_{w} + \left(\theta_{a} \bullet H'\right)}$	S10

Equations for Inhalation Exposure Route (Fugitive Dusts)	Remediation Objectives for Noncarcinogenic Contaminants - Residential, Industrial/Commercial (mg/kg)	$\frac{THQ \bullet AT \bullet 365 \frac{d}{yr}}{EF \bullet ED \bullet \left(\frac{1}{RfC} \bullet \frac{1}{PEF}\right)}$	S11
	Remediation Objectives for Noncarcinogenic Contaminants - Construction Worker (mg/kg)	$\frac{THQ \bullet AT \bullet 365 \frac{d}{yr}}{EF \bullet ED \bullet \left(\frac{1}{RfC} \bullet \frac{1}{PEF'}\right)}$	S12
	Remediation Objectives for Carcinogenic Contaminants - Residential, Industrial/ Commercial (mg/kg)	$\frac{TR \bullet AT_{c} \bullet 365 \frac{d}{yr}}{URF \bullet 1,000 \frac{ug}{mg} \bullet EF \bullet ED \bullet \frac{1}{PEF}}$	S13
	Remediation Objectives for Carcinogenic Contaminants - Construction Worker (mg/kg)	$\frac{TR \bullet AT_c \bullet 365 \frac{d}{yr}}{URF \bullet 1,000 \frac{ug}{mg} \bullet EF \bullet ED \bullet \frac{1}{PEF'}}$	S14
	Equation for Derivation of Particulate Emission Factor, PEF (m³/kg)	$PEF = \frac{Q}{C} \bullet \frac{3,600 \frac{s}{hr}}{0.036 \bullet (1 - V) \bullet \left(\frac{U_m}{U_t}\right)^3 \bullet F(x)}$	S15

	Equation for Derivation of Particulate Emission Factor, PEF' - Construction Worker (m³/kg)	$PEF' = \frac{PEF}{10}$ NOTE: PEF must be the industrial/commercial value	S16
Equations for the Soil Component of the Groundwater Ingestion Exposure Route	Remediation Objective (mg/kg)	$C_{w} \bullet \left[K_{d} + \frac{\left(\theta_{w} + \theta_{a} \bullet H' \right)}{\rho_{b}} \right]$ NOTE: This equation can only be used to model contaminant migration not in the water bearing unit.	S17
	Target Soil Leachate Concentration, C _w (mg/L)	$C_{w} = DF \bullet GW_{obj}$	S18
	Soil-Water Partition Coefficient, K _d (cm ³ /g)	$K_d = K_{oc} \bullet f_{oc}$	S19
	$\begin{array}{c} \text{Water-Filled Soil Porosity,} \\ \theta_w \\ (L_{water}/L_{soil}) \end{array}$	$\theta_{w} = \eta \bullet \left(\frac{I}{K_{s}}\right)^{1/(2b+3)}$	S20
	Air-Filled Soil Porosity, θ_a (L_{air}/L_{soil})	$\theta_a = \eta - \theta_w$	S21
	Dilution Factor, DF (unitless)	$DF = 1 + \frac{K \bullet i \bullet d}{I \bullet L}$	S22

	Groundwater Remediation Objective for Carcinogenic Contaminants, GW _{obj} (mg/L)	$\frac{TR \bullet BW \bullet AT_c \bullet 365 \frac{d}{yr}}{SF_o \bullet IR_w \bullet EF \bullet ED}$	S23
	Total Soil Porosity, η (L_{pore}/L_{soil})	$\eta = 1 - \frac{\rho_b}{\rho_s}$	S24
	Equation for Estimation of Mixing Zone Depth, d (m)	$d = (0.0112 \bullet L^2)^{0.5} + d_a \left[1 - \exp \frac{(-L \bullet I)}{\left(K \bullet i \bullet d_a \right)} \right]$	S25
Mass-Limit Equations for Inhalation Exposure Route and Soil Component of the Groundwater Ingestion Exposure	Mass-Limit Volatilization Factor for the Inhalation Exposure Route - Residential, Industrial/ Commercial, VF (m³/kg)	$VF_{M-L} = \frac{Q}{C} \bullet \left[\frac{T_{M-L} \bullet \left(3.15 \bullet 10^7 \frac{s}{yr} \right) \right]}{\rho_b \bullet d_s \bullet 10^6 \frac{g}{mg}} \right]$	S26
Route		NOTE: This equation may be used when area and depth of contaminant source are known or can be estimated reliably.	
	Mass-Limit Volatilization Factor for Inhalation Exposure Route - Construction Worker, VF' - (m³/kg)	$VF_{M-L} = \frac{VF_{M-L}}{10}$	S27

Mass-Limit Remediation Objective for Soil Component of the Groundwater Ingestion Exposure Route (mg/kg)	$\frac{\left(C_{w} \bullet I_{M-L} \bullet ED_{M-L}\right)}{\rho_{b} \bullet d_{s}}$ NOTE: This equation may be used when area and depth of contaminant source are known or can be estimated reliably.	S28
Equation for Derivation of the Soil Saturation Limit, C_{sat}	$C_{sat} = \frac{S}{\rho_b} \bullet \left[\left(K_d \bullet \rho_b \right) + \theta_w + \left(H' \bullet \theta_a \right) \right]$	S29

Section 742.APPENDIX C: Tier 2 Tables and Illustrations

Section 742. Table B: SSL Parameters

Symbol	Parameter	Units	Source	Parameter Value(s)
АТ	Averaging Time for Noncarcinogens in Ingestion Equation	yr		Residential = 6 Industrial/Commercial = 25 Construction Worker = 0.115
АТ	Averaging Time for Noncarcinogens in Inhalation Equation	yr		Residential = 30 Industrial/Commercial = 25 Construction Worker = 0.115
AT _c	Averaging Time for Carcinogens	yr	SSL	70
BW	Body Weight	kg		Residential = 15, noncarcinogens 70, carcinogens Industrial/Commercial = 70 Construction Worker = 70
$C_{ m sat}$	Soil Saturation Concentration	mg/kg	Appendix A, Table A or Equation S29 in Appendix C, Table A	Chemical-Specific or Calculated Value
C_{w}	Target Soil Leachate Concentration	mg/L	Equation S18 in Appendix C, Table A	Groundwater Standard, Health Advisory concentration, or Calculated Value
d	Mixing Zone Depth	m	SSL or Equation S25 in Appendix C, Table A	2 m or Calculated Value
d_a	Aquifer Thickness	m	Field Measurement	Site-Specific

Symbol	Parameter	Units	Source	Parameter Value(s)
d_s	Depth of Source	m	Field Measurement or Estimation	Site-Specific
D_{A}	Apparent Diffusivity	cm ² /s	Equation S10 in Appendix C, Table A	Calculated Value
D_{i}	Diffusivity in Air	cm ² /s	Appendix C, Table E	Chemical-Specific
D_{w}	Diffusivity in Water	cm ² /s	Appendix C, Table E	Chemical-Specific
DF	Dilution Factor	unitless	Equation S22 in Appendix C, Table A	20 or Calculated Value
ED	Exposure Duration for Ingestion of Carcinogens	yr		Industrial/Commercial = 25 Construction Worker = 1
ED	Exposure Duration for Inhalation of Carcinogens	yr		Residential = 30 Industrial/Commercial = 25 Construction Worker = 1
ED	Exposure Duration for Ingestion of Noncarcinogens	yr		Residential = 6 Industrial/Commercial = 25 Construction Worker = 1
ED	Exposure Duration for Inhalation of Noncarcinogens	yr		Residential = 30 Industrial/Commercial = 25 Construction Worker = 1
ED	Exposure Duration for the Direct Ingestion of Groundwater	yr		Residential = 30 Industrial/Commercial = 25 Construction Worker = 1

Symbol	Parameter	Units	Source	Parameter Value(s)
$\mathrm{ED}_{\mathrm{M-L}}$	Exposure Duration for Migration to Groundwater Mass-Limit Equation S28	yr	SSL	70
EF	Exposure Frequency	d/yr		Residential = 350 Industrial/Commercial = 250 Construction Worker = 30
F(x)	Function dependent on U_m/U_t	unitless	SSL	0.194
f_{oc}	Organic Carbon Content of Soil	g/g	SSL or Field Measurement (See Appendix C, Table F)	Surface Soil = 0.006 Subsurface soil = 0.002, or Site-Specific
$\mathrm{GW}_{\mathrm{obj}}$	Groundwater Remediation Remediation Objective	mg/L	Appendix B, Table E, 35 IAC 620.Subpart F, or Equation S23 in Appendix C, Table A	Chemical-Specific or Calculated
H'	Henry's Law Constant	unitless	Appendix C, Table E	Chemical-Specific
i	Hydraulic Gradient	m/m	Field Measurement (See Appendix C, Table F)	Site-Specific
I	Infiltration Rate	m/yr	SSL	0.3
I _{M-L}	Infiltration Rate for Migration to Groundwater Mass-Limit Equation S28	m/yr	SSL	0.18

Symbol	Parameter	Units	Source	Parameter Value(s)
	Age Adjusted Soil Ingestion Factor for Carcinogens	(mg-yr)/(kg-d)	SSL	114
IR_{soil}	Soil Ingestion Rate	mg/d		Residential = 200 Industrial/Commercial = 50 Construction Worker = 480
IR_W	Daily Water Ingestion Rate	L/d		Residential = 2 Industrial/Commercial = 1
К	Aquifer Hydraulic Conductivity	m/yr	Field Measurement (See Appendix C, Table F)	Site-Specific
K _d	Soil-Water Partition Coefficient	cm ³ /g or L/kg	Equation S19 in Appendix C, Table A	Calculated Value
K _{oc}	Organic Carbon Partition Coefficient	cm ³ /g or L/kg	Appendix C, Table E or Appendix C, Table I	Chemical-Specific
K _s	Saturated Hydraulic Conductivity	m/yr	Appendix C, Table K Appendix C, Illustration C	Site-Specific
L	Source Length Parallel to Groundwater Flow	m	Field Measurement	Site-Specific
PEF	Particulate Emission Factor	m ³ /kg	SSL or Equation S15 in Appendix C, Table A	Residential = 1.32 • 10 ⁹ or Site-Specific Industrial/Commercial = 1.24 • 10 ⁹ or Site- Specific
PEF'	Particulate Emission Factor adjusted for Agitation (construction worker)	m ³ /kg	Equation S16 in Appendix C, Table A using PEF (industrial/commercial)	1.24 • 10 ⁸ or Site-Specific

Symbol	Parameter	Units	Source	Parameter Value(s)
Q/C (used in VF equations)	Inverse of the mean concentration at the center of a square source	(g/m ² -s)/(kg/m ³)	Appendix C, Table H	Residential = 68.81 Industrial/Commercial = 85.81 Construction Worker = 85.81
Q/C (used in PEF equations)	Inverse of the mean concentration at the center of a square source	$(g/m^2-s)/(kg/m^3)$	SSL or Appendix C, Table H	Residential = 90.80 Industrial/Commercial = 85.81 Construction Worker = 85.81
RfC	Inhalation Reference Concentration	mg/m ³	IEPA (IRIS/HEAST ^a)	Toxicological-Specific (Note: for Construction Workers use subchronic reference concentrations)
$\mathrm{RfD}_{\mathrm{o}}$	Oral Reference Dose	mg/(kg-d)	IEPA (IRIS/HEAST ^a)	Toxicological-Specific (Note: for Construction Worker use subchronic reference doses)
S	Solubility in Water	mg/L	Appendix C, Table E	Chemical-Specific
SF _o	Oral Slope Factor	(mg/kg-d) ⁻¹	IEPA (IRIS/HEAST ^a)	Toxicological-Specific
Т	Exposure Interval	s		Residential = $9.5 \cdot 10^8$ Industrial/Commercial = $7.9 \cdot 10^8$ Construction Worker = $3.6 \cdot 10^6$
$T_{ ext{M-L}}$	Exposure Interval for Mass-Limit Volatilization Factor Equation S26	yr	SSL	30
THQ	Target Hazard Quotient	unitless	SSL	1

Symbol	Parameter	Units	Source	Parameter Value(s)
TR	Target Cancer Risk	unitless		Residential = 10^{-6} at the point of human exposure Industrial/Commercial = 10^{-6} at the point of human exposure Construction Worker = 10^{-6} at the point of human exposure
$U_{\rm m}$	Mean Annual Windspeed	m/s	SSL	4.69
URF	Inhalation Unit Risk Factor	(μg/m ³) ⁻¹	IEPA (IRIS/HEAST ^a)	Toxicological-Specific
U_t	Equivalent Threshold Value of Windspeed at 7 m	m/s	SSL	11.32
V	Fraction of Vegetative Cover	unitless	SSL or Field Measurement	0.5 or Site-Specific
VF	Volatilization Factor	m ³ /kg	Equation S8 in Appendix C, Table A	Calculated Value
VF′	Volatilization Factor adjusted for Agitation	m ³ /kg	Equation S9 in Appendix C, Table A	Calculated Value
VF _{M-L}	Mass-Limit Volatilization Factor	m³/kg	Equation S26 in Appendix C, Table A	Calculated Value
VF' _{M-L}	Mass-Limit Volatilization Factor adjusted for Agitation	m ³ /kg	Equation S27 in Appendix C, Table A	Calculated Value

Symbol	Parameter	Units	Source	Parameter Value(s)
η	Total Soil Porosity	L _{pore} /L _{soil}	SSL or Equation S24 in Appendix C, Table A	0.43, or Gravel = 0.25 Sand = 0.32 Silt = 0.40 Clay = 0.36, or Calculated Value
θ_a	Air-Filled Soil Porosity	$L_{ m air}/L_{ m soil}$	SSL or Equation S21 in Appendix C, Table A	Surface Soil (top 1 meter) = 0.28 Subsurface Soil (below 1 meter) = 0.13, or Gravel = 0.05 Sand = 0.14 Silt - 0.24 Clay = 0.19, or Calculated Value
$\theta_{ m w}$	Water-Filled Soil Porosity	$L_{ m water}/L_{ m soil}$	SSL or Equation S20 in Appendix C, Table A	Surface Soil (top 1 meter) = 0.15 Subsurface Soil (below 1 meter) = 0.30, or Gravel = 0.20 Sand = 0.18 Silt = 0.16 Clay = 0.17, or Calculated Value

Symbol	Parameter	Units	Source	Parameter Value(s)
ρ _b	Dry Soil Bulk Density	kg/L or g/cm ³	SSL or Field Measurement (See Appendix C, Table F)	1.5, or Gravel = 2.0 Sand = 1.8 Silt = 1.6 Clay = 1.7, or Site-Specific
$\rho_{\rm s}$	Soil Particle Density	g/cm ³	SSL or Field Measurement (See Appendix C, Table F)	2.65, or Site-Specific
$ ho_{ m w}$	Water Density	g/cm ³	SSL	1
1/(2b+3)	Exponential in Equation S20	unitless	Appendix C, Table K Appendix C, Illustration C	Site-Specific

a HEAST = Health Effects Assessment Summary Tables. USEPA, Office of Solid Waste and Emergency Response. EPA/SQO/R-95/036. Updated Quarterly.

Section 742.Appendix C: Tier 2 Tables and Illustrations

Section 742.Table C: RBCA Equations

Equations for the combined exposures routes of soil ingestion	Remediation Objectives for Carcinogenic Contaminants (mg/kg)	$TR \bullet BW \bullet AT_{c} \bullet 365 \frac{d}{yr}$ $EF \bullet ED \bullet \left\{ \left[SF_{o} \bullet 10^{-6} \frac{kg}{mg} \bullet \left(\left(IR_{soil} \bullet RAF_{o} \right) + \left(SA \bullet M \bullet RAF_{d} \right) \right) \right] + \left[SF_{i} \bullet IR_{air} \bullet \left(VF_{ss} + VF_{p} \right) \right] \right\}$	R1
inhalation of vapors and particulates, and dermal contact with soil	Remediation Objectives for Non- carcinogenic Contaminants (mg/kg)	$EF \bullet ED \bullet \left[\frac{10^{-6} \frac{kg}{mg} \left[\left(IR_{soil} \bullet RAF_{o} \right) + \left(SA \bullet M \bullet RAF_{d} \right) \right]}{RfD_{o}} + \frac{IR_{air} \bullet \left(VF_{ss} + VF_{p} \right)}{RfD_{i}} \right]$	R2
	Volatilization Factor for Surficial Soils, VF _{ss} (kg/m³) Whichever is less between R3 and R4	$VF_{ss} = \frac{2 \cdot W \cdot \rho_{s} \cdot 10^{3} \frac{cm^{3} \cdot kg}{m^{3} \cdot g}}{U_{air} \cdot \delta_{air}} \cdot \sqrt{\frac{D_{s}^{eff} \cdot H'}{\pi \cdot \left[\theta_{ws} + \left(k_{s} \cdot \rho_{s}\right) + \left(H' \cdot \theta_{as}\right)\right] \cdot \tau}}$	R3
		$VF_{ss} = \frac{W \bullet \rho_s \bullet d \bullet 10^3 \frac{cm^3 \cdot kg}{m^3 \cdot g}}{U_{air} \bullet \delta_{air} \bullet \tau}$	R4

	Volatilization Factor for Surficial Soils Regarding Particulates, VF _p (kg/m ³)	$VF_{p} = \frac{P_{e} \bullet W \bullet 10^{3} \frac{cm^{3} \cdot kg}{m^{3} \cdot g}}{U_{air} \bullet \delta_{air}}$	R5
	Effective Diffusion Coefficient in Soil Based on Vapor- Phase Concentration D_s^{eff} (cm^2/s)	$D_s^{eff} = \frac{D^{air} \bullet \theta_{as}^{3.33}}{\theta_T^2} + \frac{D^{water} \bullet \theta_{ws}^{3.33}}{H' \bullet \theta_T^2}$	R6
Equations for the ambient vapor inhalation (outdoor)	Remediation Objectives for Carcinogenic Contaminants (mg/kg)	$\frac{RBSL_{air} \bullet 10^{-3}}{VF_{samb}}$	R7
route from subsurface soils	Remediation Objectives for Non- carcinogenic Contaminants (mg/kg)	$\frac{RBSL_{air} \bullet 10^{-3}}{VF_{samb}}$	R8

Carcinogenic Risk- Based Screening Level for Air, RBSL _{air} (ug/m ³)	$RBSL_{air} = \frac{TR \bullet BW \bullet AT_c \bullet 365 \frac{d}{yr} \bullet 10^3 \frac{ug}{mg}}{SF_i \bullet IR_{air} \bullet EF \bullet ED}$	R9
Noncarcinogenic Risk-Based Screening Level for Air, RBSL _{air} (ug/m ³)	$RBSL_{air} = \frac{THQ \bullet RfD_i \bullet BW \bullet AT_n \bullet 365 \frac{d}{yr} \bullet 10^3 \frac{ug}{mg}}{IR_{air} \bullet EF \bullet ED}$	R10
Volatilization Factor - Subsurface Soil to Ambient Air, VF _{samb} (mg/m³)/(mg/kg _{soil})	$VF_{samb} = \frac{H' \bullet \rho_{s} \bullet 10^{3} \frac{cm^{3} \cdot kg}{m^{3} \cdot g}}{\left[\theta_{ws} + (k_{s} \bullet \rho_{s}) + (H' \bullet \theta_{as})\right] \bullet \left[1 + \frac{(U_{air} \bullet \delta_{air} \bullet L_{s})}{(D_{s}^{eff} \bullet W)}\right]}$	R11

Exposure Route $\begin{array}{c} \text{Source, GW}_{\text{source}} \\ \text{(mg/L)} \\ \\ \text{Leaching Facto} \\ \text{LF}_{\text{sw}} \\ \\ \text{(mg/L}_{\text{water}})/(\text{mg}) \\ \\ \\ \text{Steady-State} \\ \text{Attenuation Alc the Centerline of Dissolved Plum } \\ \text{C}_{(x)}/\text{C}_{\text{source}} \\ \\ \\ \text{Longitudinal} \\ \end{array}$	Objective	$\frac{GW_{source}}{LF_{sw}}$ NOTE: This equation can only be used to model contaminant migration not in the water bearing unit.	R12
	Groundwater at the source, GW _{source} (mg/L)	$GW_{source} = rac{GW_{comp}}{C_{(x)}} / C_{source}$	R13
	Leaching Factor, LF_{sw} $(mg/L_{water})/(mg/kg_{soil})$	$LF_{sw} = \frac{\rho_s \bullet \frac{cm^3 \cdot kg}{L \cdot g}}{\left[\theta_{ws} + (k_s \bullet \rho_s) + (H' \bullet \theta_{as})\right] \bullet \left[1 + \frac{\left(U_{gw} \bullet \delta_{gw}\right)}{\left(I \bullet W\right)}\right]}$	R14
	Attenuation Along the Centerline of a Dissolved Plume,	$C_{(x)} / C_{source} = \exp \left[\left(\frac{X}{2\alpha_x} \right) \bullet \left(1 - \sqrt{1 + \frac{4\lambda \bullet \alpha_x}{U}} \right) \right] \bullet erf \left[\frac{S_w}{4 \bullet \sqrt{\alpha_y \bullet X}} \right] \bullet erf \left[\frac{S_d}{2 \bullet \sqrt{\alpha_z \bullet X}} \right]$ NOTE: This equation does not predict the contaminant flow within bedrock. If the value of the First Order Degradation Constant (\(\lambda\)) is not readily available, then set \(\lambda\) = 0. 	R15
	Dispersivity, α_x	$\alpha_{x} = 0.10 \bullet X$	R16

Transverse Dispersivity, α_y (cm)	$\alpha_{y} = \frac{\alpha_{x}}{3}$	R17
Vertical Dispersivity, α_z (cm)	$\alpha_z = \frac{\alpha_x}{20}$	R18
Specific Discharge, U (cm/d)	$U = \frac{K \bullet i}{\theta_T}$	R19
Soil-Water Sorption Coefficient, k _s	$k_s = K_{oc} \bullet f_{oc}$	R20
Volumetric Air Content in Vadose Zone Soils, θ _{as} (cm ³ _{air} /cm ³ _{soil})	$\theta_{as} = \theta_T - \frac{(w \bullet \rho_s)}{\rho_w}$	R21
Volumetric Water Content in Vadose Zone Soils, θ_{ws} (cm ³ _{water} /cm ³ _{soil})	$\theta_{ws} = \frac{w \bullet \rho_s}{\rho_w}$	R22
Total Soil Porosity, θ_T (cm^3/cm^3_{soil})	$\theta_T = \theta_{as} + \theta_{ws}$	R23

	Groundwater Darcy Velocity, U _{gw} (cm/yr)	$U_{gw} = K ullet i$	R24
Equations for the Groundwater Ingestion Exposure Route	Remediation Objective for Carcinogenic Contaminants (mg/L)	$\frac{TR \bullet BW \bullet AT_c \bullet 365 \frac{d}{yr}}{SF_o \bullet IR_w \bullet EF \bullet ED}$	R25
	Dissolved Hydrocarbon Concentration along Centerline, C _(x) (g/cm ³ _{water})	$C_{(x)} = \\ C_{source} \bullet \exp\left[\left(\frac{X}{2\alpha_{X}}\right) \bullet \left(1 - \sqrt{1 + \frac{4\lambda \bullet \alpha_{X}}{U}}\right)\right] \bullet erf\left[\frac{S_{W}}{4 \bullet \sqrt{\alpha_{Y} \bullet X}}\right] \bullet erf\left[\frac{S_{d}}{2 \bullet \sqrt{\alpha_{Z} \bullet X}}\right]$	R26
		 NOTE: This equation does not predict the contaminant flow within bedrock. If the value of the First Order Degradation Constant (λ) is not readily available, then set λ = 0. 	

Section 742.Table D: RBCA Parameters

Symbol	Parameter	Units	Source	Parameter Value(s)
AT _c	Averaging Time for Carcinogens	yr	RBCA	70
AT _n	Averaging Time for Noncarcinogens	yr	RBCA	Residential = 30 Industrial/Commercial = 25 Construction Worker = 0.115
BW	Adult Body Weight	kg	RBCA	70
C _{source}	The greatest potential concentration of the contaminant of concern in the groundwater at the source of the contamination, based on the concentrations of contaminants in groundwater due to the release and the projected concentration of the contaminant migrating from the soil to the groundwater.	mg/L	Field Measurement	Site-Specific
C _(x)	Concentration of Contaminant in Groundwater at Distance X from the source	mg/L	Equation R26 in Appendix C, Table C	Calculated Value

Symbol	Parameter	Units	Source	Parameter Value(s)
C _(x) /C _{source}	Steady-State Attenuation Along the Centerline of a Dissolved Plume	unitless	Equation R15 in Appendix C, Table C	Calculated Value
d	Lower Depth of Surficial Soil Zone	cm	Field Measurement	100 or Site-Specific (not to exceed 100)
D ^{air}	Diffusion Coefficient in Air	cm ² /s	Appendix C, Table E	Chemical-Specific
D ^{water}	Diffusion Coefficient in Water	cm ² /s	Appendix C, Table E	Chemical-Specific
D _s ^{eff}	Effective Diffusion Coefficient in Soil Based on Vapor-Phase Concentration	cm ² /s	Equation R6 in Appendix C, Table C	Calculated Value
ED	Exposure Duration	yr	RBCA	Residential = 30 Industrial/Commercial = 25 Construction Worker = 1
EF	Exposure Frequency	d/yr	RBCA	Residential = 350 Industrial/Commercial = 250 Construction Worker = 30
erf	Error Function	unitless	Appendix C, Table G	Mathematical Function

Symbol	Parameter	Units	Source	Parameter Value(s)
f_{oc}	Organic Carbon Content of Soil	g/g	RBCA or Field Measurement (See Appendix C, Table F)	Surface Soil = 0.006 Subsurface Soil = 0.002 or Site-Specific
$\mathrm{GW}_{\mathrm{comp}}$	Groundwater Objective at the Compliance Point	mg/L	Appendix B, Table E, 35 IAC 620.Subpart F, or Equation R25 in Appendix C, Table C	Site-Specific
GW _{source}	Groundwater Concentration at the Source	mg/L	Equation R13 in Appendix C, Table C	Calculated Value
H'	Henry's Law Constant	cm ³ _{water} /cm ³ _{air}	Appendix C, Table E	Chemical-Specific
i	Hydraulic Gradient	cm/cm (unitless)	Field Measurement (See Appendix C, Table F)	Site-Specific
I	Infiltration Rate	cm/yr	RBCA	30
IR _{air}	Daily Outdoor Inhalation Rate	m ³ /d	RBCA	20
IR _{soil}	Soil Ingestion Rate	mg/d	RBCA	Residential = 100 Industrial/Commercial = 50 Construction Worker = 480
IR _w	Daily Water Ingestion Rate	L/d	RBCA	Residential = 2 Industrial/Commercial = 1

Symbol	Parameter	Units	Source	Parameter Value(s)
K	Aquifer Hydraulic Conductivity	cm/d for Equations R15, R19 and R26 cm/yr for Equation R24	Field Measurement (See Appendix C, Table F)	Site-Specific
K _{oc}	Organic Carbon Partition Coefficient	cm ³ /g or L/kg	Appendix C, Table E or Appendix C, Table I	Chemical-Specific
k _s (non-ionizing organics)	Soil Water Sorption Coefficient	cm ³ water/g _{soil}	Equation R20 in Appendix C,Table C	Calculated Value
k _s (ionizing organics)	Soil Water Sorption Coefficient	cm ³ _{water} /g _{soil}	Equation R20 in Appendix C, Table C	Chemical-Specific
k _s (inorganics)	Soil Water Sorption Coefficient	cm ³ _{water} /g _{soil}	Appendix C, Table J	Chemical-Specific
$L_{\rm s}$	Depth to Subsurface Soil Sources	cm	RBCA	100
LF _{sw}	Leaching Factor	(mg/L _{water})/ (mg/kg _{soil})	Equation R14 in Appendix C, Table C	Calculated Value
М	Soil to Skin Adherence Factor	mg/cm ²	RBCA	0.5

Symbol	Parameter	Units	Source	Parameter Value(s)
Pe	Particulate Emission Rate	g/cm ² -s	RBCA	6.9 • 10 ⁻¹⁴
RAF_d	Dermal Relative Absorption Factor	unitless	RBCA	0.5
RAF _d (PNAs)	Dermal Relative Absorption Factor	unitless	RBCA	0.05
RAF _d (inorganics)	Dermal Relative Absorption Factor	unitless	RBCA	0
RAF _o	Oral Relative Absorption Factor	unitless	RBCA	1.0
RBSL _{air}	Carcinogenic Risk-Based Screening Level for Air	μg/m³	Equation R9 in Appendix C, Table C	Chemical-, Media-, and Exposure Route-Specific
RBSL _{air}	Noncarcinogenic Risk-Based Screening Level for Air	μg/m ³	Equation R10 in Appendix C, Table C	Chemical-, Media-, and Exposure Route-Specific
RfD _i	Inhalation Reference Dose	mg/kg-d	IEPA (IRIS/HEAST ^a)	Toxicological-Specific
RfD_o	Oral Reference Dose	mg/(kg-d)	IEPA (IRIS/HEAST ^a)	Toxicological-Specific (Note: for Construction Worker use subchronic reference doses)
SA	Skin Surface Area	cm ² /d	RBCA	3,160

Symbol	Parameter	Units	Source	Parameter Value(s)
S_d	Source Width Perpendicular to Groundwater Flow Direction in Vertical Plane	cm	Field Measurement	For Migration to Groundwater Route: Use 200 or Site-Specific For Groundwater remediation objective: Use Site-Specific
S_{w}	Source Width Perpendicular to Groundwater Flow Direction in Horizontal Plane	cm	Field Measurement	Site-Specific
SF _i	Inhalation Cancer Slope Factor	(mg/kg-d) ⁻¹	IEPA (IRIS/HEAST ^a)	Toxicological-Specific
SF _o	Oral Slope Factor	(mg/kg-d) ⁻¹	IEPA (IRIS/HEAST ^a)	Toxicological-Specific
THQ	Target Hazard Quotient	unitless	RBCA	1
TR	Target Cancer Risk	unitless	RBCA	Residential = 10^{-6} at the point of human exposure Industrial/Commercial = 10^{-6} at the point of human exposure Construction Worker = 10^{-6} at the point of human exposure
U	Specific Discharge	cm/d	Equation R19 in Appendix C, Table C	Calculated Value

Symbol	Parameter	Units	Source	Parameter Value(s)
$\mathbf{U}_{\mathrm{air}}$	Average Wind Speed Above Ground Surface in Ambient Mixing Zone	cm/s	RBCA	225
U_{gw}	Groundwater Darcy Velocity	cm/yr	Equation R24 in Appendix C, Table C	Calculated Value
VF _p	Volatilization Factor for Surficial Soils Regarding Particulates	kg/m ³	Equation R5 in Appendix C, Table C	Calculated Value
VF _{samb}	Volatilization Factor (Subsurface Soils to Ambient Air)	(mg/m ³ _{air})/(mg/ kg _{soil}) or kg/m ³	Equation R11 in Appendix C, Table C	Calculated Value
VF _{ss}	Volatilization Factor for Surficial Soils	kg/m ³	Use Equations R3 and R4 in Appendix C, Table C	Calculated Value from Equation R3 or R4 (whichever is less)
W	Width of Source Area Parallel to Direction to Wind or Groundwater Movement	cm	Field Measurement	Site-Specific

Symbol	Parameter	Units	Source	Parameter Value(s)
w	Average Soil Moisture Content	gwater/gsoil	RBCA or Field Measurement (See Appendix C, Table F)	0.1, or Surface Soil (top 1 meter) = 0.1 Subsurface Soil (below 1 meter) = 0.2, or Site-Specific
X	Distance along the Centerline of the Groundwater Plume Emanating from a Source. The x direction is the direction of groundwater flow	cm	Field Measurement	Site-Specific
$\alpha_{\rm x}$	Longitudinal Dispersitivity	cm	Equation R16 in Appendix C, Table C	Calculated Value
$\alpha_{ m y}$	Transverse Dispersitivity	cm	Equation R17 in Appendix C, Table C	Calculated Value
$\alpha_{\rm z}$	Vertical Dispersitivity	cm	Equation R18 in Appendix C, Table C	Calculated Value
δ_{air}	Ambient Air Mixing Zone Height	cm	RBCA	200

Symbol	Parameter	Units	Source	Parameter Value(s)
δ_{gw}	Groundwater Mixing Zone Thickness	cm	RBCA	200
θ_{as}	Volumetric Air Content in Vadose Zone Soils	cm ³ _{air} /cm ³ _{soil}	RBCA or Equation R21 in Appendix C, Table C	Surface Soil (top 1 meter) = 0.28 Subsurface Soil (below 1 meter)= 0.13, or Gravel = 0.05 Sand = 0.14 Silt = 0.16 Clay = 0.17, or Calculated Value
θ_{ws}	Volumetric Water Content in Vadose Zone Soils	cm ³ _{water} /cm ³ _{soil}	RBCA or Equation R22 in Appendix C, Table C	Surface Soil (top 1 meter) = 0.15 Subsurface Soil (below 1 meter) = 0.30, or Gravel = 0.20 Sand = 0.18 Silt = 0.16 Clay = 0.17, or Calculated Value

Symbol	Parameter	Units	Source	Parameter Value(s)
θ_{T}	Total Soil Porosity	cm ³ /cm ³ _{soil}	RBCA or Equation R23 in Appendix C, Table C	0.43, or Gravel = 0.25 Sand = 0.32 Silt = 0.40 Clay = 0.36, or Calculated Value
λ	First Order Degradation Constant	d ⁻¹	Appendix C, Table E	Chemical-Specific
π	pi			3.1416
ρ _s	Soil Bulk Density	g/cm ³	RBCA or Field Measurement (See Appendix C, Table F)	1.5, or Gravel = 2.0 Sand = 1.8 Silt = 1.6 Clay = 1.7, or Site-Specific
$\rho_{\rm w}$	Water Density	g/cm ³	RBCA	1
τ	Averaging Time for Vapor Flux	s	RBCA	9.46 • 10 ⁸

a HEAST = Health Effects Assessment Summary Tables. USEPA, Office of Solid Waste and Emergency Response. EPA/540/R-95/036. Updated Quarterly.

Section 742. Table E: Default Physical and Chemical Parameters

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficien t (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
Neutral Organics							
83-32-9	Acenaphthene	4.24	0.0421	7.69E-6	0.00636	7,080	0.0034
67-64-1	Acetone	1,000,000	0.124	1.14E-5	0.00159	0.575	0.0495
15972-60-8	Alachlor	242	0.0198	5.69E-6	0.00000132	394	No Data
116-06-3	Aldicarb	6,000	0.0305	7.19E-6	0.000000057	12	0.00109
309-00-2	Aldrin	0.18	0.0132	4.86E-6	0.00697	2,450,000	0.00059
120-12-7	Anthracene	0.0434	0.0324	7.74E-6	0.00267	29,500	0.00075
1912-24-9	Atrazine	70	0.0258	6.69E-6	0.00000005	451	No Data
71-43-2	Benzene	1,750	0.088	9.80E-6	0.228	58.9	0.0009

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
56-55-3	Benzo(a)anthracene	0.0094	0.0510	9.00E-6	0.000137	398,000	0.00051
205-99-2	Benzo(b)fluoranthene	0.0015	0.0226	5.56E-6	0.00455	1,230,000	0.00057
207-08-9	Benzo(k)fluoranthene	0.0008	0.0226	5.56E-6	0.000034	1,230,000	0.00016
65-85-0	Benzoic Acid	3,500	0.0536	7.97E-6	0.0000631	0.600	No Data
50-32-8	Benzo(a)pyrene	0.00162	0.043	9.00E-6	0.0000463	1,020,000	0.00065
111-44-4	Bis(2-chloroethyl)ether	17,200	0.0692	7.53E-6	0.000738	15.5	0.0019
117-81-7	Bis(2-ethylhexyl)phthalate	0.34	0.0351	3.66E-6	0.00000418	15,100,000	0.0018
75-27-4	Bromodichloromethane	6,740	0.0298	1.06E-5	0.0656	55.0	No Data
75-25-2	Bromoform	3,100	0.0149	1.03E-5	0.0219	87.1	0.0019
71-36-3	Butanol	74,000	0.0800	9.30E-6	0.000361	6.92	0.01283
85-68-7	Butyl Benzyl Phthalate	2.69	0.0174	4.83E-6	0.0000517	57,500	0.00385
86-74-8	Carbazole	7.48	0.0390	7.03E-6	0.000000626	3,390	No Data

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
1563-66-2	Carbofuran	320	0.0249	6.63E-6	.00377	37	No Data
75-15-0	Carbon Disulfide	1,190	0.104	1.00E-5	1.24	45.7	No Data
56-23-5	Carbon Tetrachloride	793	0.0780	8.80E-6	1.25	174	0.0019
57-74-9	Chlordane	0.056	0.0118	4.37E-6	0.00199	120,000	0.00025
106-47-8	p-Chloroaniline	5,300	0.0483	1.01E-5	0.0000136	66.1	No Data
108-09-7	Chlorobenzene	472	0.0730	8.70E-6	0.152	219	0.0023
124-48-1	Chlorodibromomethane	2,600	0.0196	1.05E-5	0.0321	63.1	0.00385
67-66-3	Chloroform	7,920	0.104	1.00E-5	0.15	39.8	0.00039
95-57-8	2-Chlorophenol	22,000	0.0501	9.46E-6	0.016	388	No Data
218-01-9	Chrysene	0.0016	0.0248	6.21E-6	0.00388	398,000	0.00035
94-75-7	2,4-D	680	0.0231	7.31E-6	0.00000041	451	0.00385
72-54-8	4,4'-DDD	0.09	0.0169	4.76E-6	0.000164	1,000,000	0.000062

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
72-55-9	4,4'-DDE	0.12	0.0144	5.87E-6	0.000861	4,470,000	0.000062
50-29-3	4,4'-DDT	0.025	0.0137	4.95E-6	0.000332	2,630,000	0.000062
75-99-0	Dalapon	900,000	0.0414	9.46E-6	0.00000264	5.8	0.005775
53-70-3	Dibenzo(a,h)anthracene	0.00249	0.0202	5.18E-6	0.000000603	3,800,000	0.00037
96-12-8	1,2-Dibromo-3- chloropropane	1,200	0.0212	7.02E-6	0.00615	182	0.001925
106-93-4	1,2-Dibromoethane	4,200	0.0287	8.06E-6	0.0303	93	0.005775
84-74-2	Di-n-butyl Phthalate	11.2	0.0438	7.86E-6	0.000000038 5	33,900	0.03013
95-50-1	1,2-Dichlorobenzene	156	0.0690	7.90E-6	0.0779	617	0.0019
106-46-7	1,4-Dichlorobenzene	73.8	0.0690	7.90E-6	0.0996	617	0.0019
91-94-1	3,3-Dichlorobenzidine	3.11	0.0194	6.74E-6	0.000000164	724	0.0019

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradatio n Constant (λ) (d ⁻¹)
75-34-3	1,1-Dichloroethane	5,060	0.0742	1.05E-5	0.23	31.6	0.0019
107-06-2	1,2-Dichloroethane	8,520	0.104	9.90E-6	0.0401	17.4	0.0019
75-35-4	1,1-Dichloroethylene	2,250	0.0900	1.04E-5	1.07	58.9	0.0053
156-59-2	cis-1,2-Dichloroethylene	3,500	0.0736	1.13E-5	0.167	35.5	0.00024
156-60-5	trans-1,2-Dichloroethylene	6,300	0.0707	1.19E-5	0.385	52.5	0.00024
120-83-2	2,4-Dichlorophenol	4,500	0.0346	8.77E-6	0.00013	147	0.00027
78-87-5	1,2-Dichloropropane	2,800	0.0782	8.73E-6	0.115	43.7	0.00027
542-75-6	1,3-Dichloropropylene (cis + trans)	2,800	0.0626	1.00E-5	0.726	45.7	0.061
60-57-1	Dieldrin	0.195	0.0125	4.74E-6	0.000619	21,400	0.00032
84-66-2	Diethyl Phthalate	1,080	0.0256	6.35E-6	0.0000185	288	0.00619
105-67-9	2,4-Dimethylphenol	7,870	0.0584	8.69E-6	0.000082	209	0.0495
51-28-5	2,4-Dinitrophenol	2,790	0.0273	9.06E-6	0.0000182	0.01	0.00132

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
121-14-2	2,4-Dinitrotoluene	270	0.203	7.06E-6	0.0000038	95.5	0.00192
606-20-2	2,6-Dinitrotoluene	182	0.0327	7.26E-6	0.0000306	69.2	0.00192
88-85-7	Dinoseb	52	0.0215	6.62E-6	0.0000189	1,120	0.002817
117-84-0	Di-n-octyl Phthalate	0.02	0.0151	3.58E-6	0.00274	83,200,00	0.0019
115-29-7	Endosulfan	0.51	0.0115	4.55E-6	0.000459	2,140	0.07629
145-73-3	Endothall	21,000	0.0291	8.07E-6	0.000000010	0.29	No Data
72-20-8	Endrin	0.25	0.0125	4.74E-6	0.000308	12,300	0.00032
100-41-4	Ethylbenzene	169	0.0750	7.80E-6	0.323	363	0.003
206-44-0	Fluoranthene	0.206	0.0302	6.35E-6	0.00066	107,000	0.00019
86-73-7	Fluorene	1.98	0.0363	7.88E-6	0.00261	13,800	0.000691
76-44-8	Heptachlor	0.18	0.0112	5.69E-6	60.7	1,410,000	0.13
1024-57-3	Heptachlor epoxide	0.2	0.0132	4.23E-6	0.00039	83,200	0.00063

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
118-74-1	Hexachlorobenzene	6.2	0.0542	5.91E-6	0.0541	55,000	0.00017
319-84-6	alpha-HCH (alpha-BHC)	2.0	0.0142	7.34E-6	0.000435	1,230	0.0025
58-89-9	gamma-HCH (Lindane)	6.8	0.0142	7.34E-6	0.000574	1,070	0.0029
77-47-4	Hexachlorocyclo- pentadiene	1.8	0.0161	7.21E-6	1.11	200,000	0.012
67-72-1	Hexachloroethane	50	0.0025	6.80E-6	0.159	1,780	0.00192
193-39-5	Indeno(1,2,3-c,d)pyrene	0.000022	0.0190	5.66E-6	0.0000656	3,470,000	0.00047
78-59-1	Isophorone	12,000	0.0623	6.76E-6	0.000272	46.8	0.01238
7439-97-6	Mercury		0.0307	6.30E-6	0.467		No Data
72-43-5	Methoxychlor	0.045	0.0156	4.46E-6	0.000648	97,700	0.0019
74-83-9	Methyl Bromide	15,200	0.0728	1.21E-5	0.256	10.5	0.01824
75-09-2	Methylene Chloride	13,000	0.101	1.17E-5	0.0898	11.7	0.012
95-48-7	2-Methylphenol	26,000	0.0740	8.30E-6	0.0000492	91.2	0.0495

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
91-20-3	Naphthalene	31.0	0.0590	7.50E-6	0.0198	2,000	0.0027
98-95-3	Nitrobenzene	2,090	0.0760	8.60E-6	0.000984	64.6	0.00176
86-30-6	N-Nitrosodiphenylamine	35.1	0.0312	6.35E-6	0.000205	1,290	0.01
621-64-7	N-Nitrosodi-n-propylamine	9,890	0.0545	8.17E-6	0.0000923	24.0	0.0019
87-86-5	Pentachlorophenol	1,950	0.0560	6.10E-6	0.000001	592	0.00045
108-95-2	Phenol	82,800	0.0820	9.10E-6	0.0000163	28.8	0.099
1918-02-1	Picloram	430	0.0255	5.28E-6	0.000000001 66	1.98	No Data
1336-36-3	Polychlorinated biphenyls (PCBs)	0.7	a	a	a	309,000	No Data
129-00-0	Pyrene	0.135	0.0272	7.24E-6	0.000451	105,000	0.00018
122-34-9	Simazine	5	0.027	7.36E-6	0.000000013	133	No Data
100-42-5	Styrene	310	0.0710	8.00E-6	0.113	776	0.0033
93-72-1	2,4,5-TP (Silvex)	31	0.0194	5.83E-6	0.000000003	5,440	No Data

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
127-18-4	Tetrachloroethylene	200	0.0720	8.20E-6	0.754	155	0.00096
108-88-3	Toluene	526	0.0870	8.60E-6	0.272	182	0.011
8001-35-2	Toxaphene	0.74	0.0116	4.34E-6	0.000246	257,000	No Data
120-82-1	1,2,4-Trichlorobenzene	300	0.0300	8.23E-6	0.0582	1,780	0.0019
71-55-6	1,1,1-Trichloroethane	1,330	0.0780	8.80E-6	0.705	110	0.0013
79-00-5	1,1,2-Trichloroethane	4,420	0.0780	8.80E-6	0.0374	50.1	0.00095
79-01-6	Trichloroethylene	1,100	0.0790	9.10E-6	0.422	166	0.00042
95-95-4	2,4,5-Trichlorophenol	1,200	0.0291	7.03E-6	0.000178	1,600	0.00038
88-06-2	2,4,6-Trichlorophenol	800	0.0318	6.25E-6	0.000319	381	0.00038
108-05-4	Vinyl Acetate	20,000	0.0850	9.20E-6	0.021	5.25	No Data
57-01-4	Vinyl Chloride	2,760	0.106	1.23E-6	1.11	18.6	0.00024
108-38-3	m-Xylene	161	0.070	7.80E-6	0.301	407	0.0019

CAS No.	Chemical	Solubility in Water (S) (mg/L)	Diffusivity in Air (D _i) (cm ² /s)	Diffusivity in Water (D _w) (cm ² /s)	Dimensionle ss Henry's Law Constant (H') (25°C)	Organic Carbon Partition Coefficient (K _{oc}) (L/kg)	First Order Degradati on Constant (λ) (d^{-1})
95-47-6	o-Xylene	178	0.087	1.00E-5	0.213	363	0.0019
106-42-3	p-Xylene	185	0.0769	8.44E-6	0.314	389	0.0019
1330-20-7	Xylenes (total)	186	0.0720	9.34E-6	0.25	260	0.0019

Chemical Abstracts Service (CAS) registry number. This number in the format xxx-xx-x, is unique for each chemical and allows efficient searching on computerized data bases.

^aSoil remediation objectives are determined pursuant to 40 CFR 761.120, as incorporated by reference at Section 732.104 (the USEPA "PCB Spill Cleanup Policy"), for most sites; persons remediating sites should consult with BOL if calculation of Tier 2 soil remediation objectives is desired.

Soil Parameters

Section 742.Table F: Methods for Determining Physical

Methods for	Determining Physical Soi	il Parameters
Parameter	Sampling Location ^a	Method
$ ho_{_{b}}$ (soil bulk density)	Surface	ASTM - D 1556-90 Sand Cone Method ^b
		ASTM - D 2167-94 Rubber Balloon Method ^b
		ASTM - D 2922-91 Nuclear Method ^b
	Subsurface	ASTM - D 2937-94 Drive Cylinder Method ^b
$\rho_{_{\rm s}}(\text{soil particle}$ density)	Surface or Subsurface	ASTM - D 854-92 Specific Gravity of Soil ^b
w (moisture content)	Surface or Subsurface	ASTM - D 4959-89 (Reapproved 1994) Standard ^b
		ASTM - D 4643-93 Microwave Oven ^b
		ASTM - D2216-92 Laboratory Determination ^b
		ASTM - D3017-88 (Reapproved 1993) Nuclear Method ^b
		Equivalent USEPA Method (e.g., sample preparation procedures described in methods 3541 or 3550)
f _{oc} (organic carbon content)	Surface or Subsurface	Nelson and Sommers (1982)
		ASTM - D 2974-87 (Reapproved 1995) Moisture, Ash, and Organic Matter ^b
		USEPA Method 9060A Total Organic Content

Methods for	Determining Physical Soi	l Parameters
Parameter	Sampling Location ^a	Method
η or $\theta_{_{\rm T}}$ (total soil porosity)	Surface or Subsurface (calculated)	Equation S24 in Appendix C, Table A for SSL Model, or Equation R23 in Appendix C, Table C for RBCA Model
θ_{a} or θ_{as} (air-filled soil porosity)	Surface or Subsurface (calculated)	Equation S21 in Appendix C, Table A for SSL Model, or Equation R21 in Appendix C, Table C for RBCA Model
$\theta_{_{w}}$ or $\theta_{_{ws}}$ (water-filled soil porosity)	Surface or Subsurface (calculated)	Equation S20 in Appendix C, Table A for SSL Model, or Equation R22 in Appendix C, Table C for RBCA Model
		ASTM - D 5084-90 Flexible Wall Permeameter
K (hydraulic conductivity)	Surface or Subsurface	Pump Test
		Slug Test
i (hydraulic gradient)	Surface or Subsurface	Field Measurement

^a This is the location where the sample is collected ^b As incorporated by reference in Section 742.120.

Section 742. Table G: Error Function (erf)

$$erf(\beta) = \frac{2}{\sqrt{\pi}} \int_{0}^{\beta} e^{-\varepsilon^{2}} d\varepsilon$$

β	erf (β)
0	0
0.05	0.056372
0.1	0.112463
0.15	0.167996
0.2	0.222703
0.25	0.276326
0.3	0.328627
0.35	0.379382
0.4	0.428392
0.45	0.475482
0.5	0.520500
0.55	0.563323
0.6	0.603856
0.65	0.642029
0.7	0.677801
0.75	0.711156
0.8	0.742101
0.85	0.770668
0.9	0.796908
0.95	0.820891
1.0	0.842701
1.1	0.880205
1.2	0.910314

1.3	0.934008
1.4	0.952285
1.5	0.966105
1.6	0.976348
1.7	0.983790
1.8	0.989091
1.9	0.992790
2.0	0.995322
2.1	0.997021
2.2	0.998137
2.3	0.998857
2.4	0.999311
2.5	0.999593
2.6	0.999764
2.7	0.999866
2.8	0.999925
2.9	0.999959
3.0	0.999978

742.APPENDIX C: Tier 2 Tables and Illustrations

Section 742.Table H: Q/C Values by Source Area

Source (Acres)	Area Q/C Value (g/m²-s per kg/m³)				
0.5	97.78				
1	85.81				
2	76.08				
5	65.75				
10	59.16				
30	50.60				

Section 742.TABLE I: K_{oc} Values for Ionizing Organics as a Function of pH (cm³/g or L/kg)

рН	Benzoic Acid	2-Chloro- phenol	2,4- Dichloro- phenol	Pentachloro -phenol	2,4,5- Trichloro- phenol	2,4,6- Trichloro- phenol	Dinoseb	2,3,5-TP (Silvex)
4.5	1.07E+01	3.98E+02	1.59E+02	1.34E+04	2.37E+03	1.06E+03	3.00E+03	1.28E+04
4.6	9.16E+00	3.98E+02	1.59E+02	1.24E+04	2.37E+03	1.05E+03	2.71E+03	1.13E+04
4.7	7.79E+00	3.98E+02	1.59E+02	1.13E+04	2.37E+03	1.05E+03	2.41E+03	1.01E+04
4.8	6.58E+00	3.98E+02	1.59E+02	1.02E+04	2.37E+03	1.05E+03	2.12E+03	9.16E+03
4.9	5.54E+00	3.98E+02	1.59E+02	9.05E+03	2.37E+03	1.04E+03	1.85E+04	8.40E+03
5.0	4.64E+00	3.98E+02	1.59E+02	7.96E+03	2.36E+03	1.03E+03	1.59E+04	7.76E+03
5.1	3.88E+00	3.98E+02	1.59E+02	6.93E+03	2.36E+03	1.02E+03	1.36E+04	7.30E+03
5.2	3.25E+00	3.98E+02	1.59E+02	5.97E+03	2.35E+03	1.01E+03	1.15E+04	6.91E+03
5.3	2.72E+00	3.98E+02	1.59E+02	5.10E+03	2.34E+03	9.99E+02	9.66E+03	6.60E+03
5.4	2.29E+00	3.98E+02	1.58E+02	4.32E+03	2.33E+03	9.82E+02	8.10E+03	6.36E+03
5.5	1.94E+00	3.97E+02	1.58E+02	3.65E+03	2.32E+03	9.62E+02	6.77E+03	6.16E+03
5.6	1.65E+00	3.97E+02	1.58E+02	3.07E+03	2.31E+03	9.38E+02	5.65E+03	6.00E+03
5.7	1.42E+00	3.97E+02	1.58E+02	2.58E+03	2.29E+03	9.10E+02	4.73E+03	5.88E+03
5.8	1.24E+00	3.97E+02	1.58E+02	2.18E+03	2.27E+03	8.77E+02	3.97E+03	5.78E+03
5.9	1.09E+00	3.97E+02	1.57E+02	1.84E+03	2.24E+03	8.39E+02	3.35E+03	5.70E+03

pН	Benzoic Acid	2-Chloro- phenol	2,4- Dichloro- phenol	Pentachloro -phenol	2,4,5- Trichloro- phenol	2,4,6- Trichloro- phenol	Dinoseb	2,3,5-TP (Silvex)
6.0	9.69E-01	3.96E+02	1.57E+02	1.56E+03	2.21E+03	7.96E+02	2.84E+03	5.64E+03
6.1	8.75E-01	3.96E+02	1.57E+02	1.33E+03	2.17E+03	7.48E+02	2.43E+03	5.59E+03
6.2	7.99E-01	3.96E+02	1.56E+02	1.15E+03	2.12E+03	6.97E+02	2.10E+03	5.55E+03
6.3	7.36E-01	3.95E+02	1.55E+02	9.98E+02	2.06E+03	6.44E+02	1.83E+03	5.52E+03
6.4	6.89E-01	3.94E+02	1.54E+02	8.77E+02	1.99E+03	5.89E+02	1.62E+03	5.50E+03
6.5	6.51E-01	3.93E+02	1.53E+02	7.81E+02	1.91E+03	5.33E+02	1.45E+03	5.48E+03
6.6	6.20E-01	3.92E+02	1.52E+02	7.03E+02	1.82E+03	4.80E+02	1.32E+03	5.46E+03
6.7	5.95E-01	3.90E+02	1.50E+02	6.40E+02	1.71E+03	4.29E+02	1.21E+03	5.45E+03
6.8	5.76E-01	3.88E+02	1.47E+02	5.92E+02	1.60E+03	3.81E+02	1.12E+03	5.44E+03
6.9	5.60E-01	3.86E+02	1.45E+02	5.52E+02	1.47E+03	3.38E+02	1.05E+03	5.43E+03
7.0	5.47E-01	3.83E+02	1.41E+02	5.21E+02	1.34E+03	3.00E+02	9.96E+02	5.43E+03
7.1	5.38E-01	3.79E+02	1.38E+02	4.96E+02	1.21E+03	2.67E+02	9.52E+02	5.42E+03
7.2	5.32E-01	3.75E+02	1.33E+02	4.76E+02	1.07E+03	2.39E+02	9.18E+02	5.42E+03
7.3	5.25E-01	3.69E+02	1.28E+02	4.61E+02	9.43E+02	2.15E+02	8.90E+02	5.42E+03
7.4	5.19E-01	3.62E+02	1.21E+02	4.47E+02	8.19E+02	1.95E+02	8.68E+02	5.41E+03
7.5	5.16E-01	3.54E+02	1.14E+02	4.37E+02	7.03E+02	1.78E+02	8.50E+02	5.41E+03
7.6	5.13E-01	3.44E+02	1.07E+02	4.29E+02	5.99E+02	1.64E+02	8.36E+02	5.41E+03

рН	Benzoic Acid	2-Chloro- phenol	2,4- Dichloro- phenol	Pentachloro -phenol	2,4,5- Trichloro- phenol	2,4,6- Trichloro- phenol	Dinoseb	2,3,5-TP (Silvex)
7.7	5.09E-01	3.33E+02	9.84E+01	4.23E+02	5.07E+02	1.53E+02	8.25E+02	5.41E+03
7.8	5.06E-01	3.19E+02	8.97E+01	4.18E+02	4.26E+02	1.44E+02	8.17E+02	5.41E+03
7.9	5.06E-01	3.04E+02	8.07E+01	4.14E+02	3.57E+02	1.37E+02	8.10E+02	5.41E+03
8.0	5.06E-01	2.86E+02	7.17E+01	4.10E+02	2.98E+02	1.31E+02	8.04E+02	5.41E+03

Section 742.TABLE J: Values to be Substituted for k_s when Evaluating Inorganics as a Function of pH (cm³water/g_{soil})

pН	As	Ba	Ве	Cd	Cr (+3)	Cr (+6)	Hg	Ni	Ag	Se	Tl	Zn
49	2 5E+	1 1E+	2 3E+	1 5E+	1.2E+	3 1E+	4 0F-02	1.6E+	1 0F-01	1 8E.+	4 4F+	1.6E+
5.0	2.5E+	1.2E+	2.6E+	1.7E+	1.9E+	3.1E+	6.0E-02	1.8E+	1.3E-01	1.7E+	4.5E+	1.8E+
5.1	2.5E+	1.4E+	2.8E+	1.9E+	3.0E+	3.0E+	9.0E-02	2.0E+	1.6E-01	1.6E+	4.6E+	1.9E+
5.2	2.6E+	1.5E+	3.1E+	2.1E+	4.9E+	2.9E+	1.4E-01	2.2E+	2.1E-01	1.5E+	4.7E+	2.1E+
5.3	2.6E+	1.7E+	3.5E+	2.3E+	8.1E+	2.8E+	2.0E-01	2.4E+	2.6E-01	1.4E+	4.8E+	2.3E+
5.4	2.6E+	1.9E+	3.8E+	2.5E+	1.3E+	2.7E+	3.0E-01	2.6E+	3.3E-01	1.3E+	5.0E+	2.5E+
5.5	2.6E+	2.1E+	4 2E+	2.7E+	2.1E+	2.7E+	4 6E-01	2.8E+	4 2E-01	1 2E+	5 1E+	2.6E+
5.6	2.6E+	2.2E+	4.7E+	2.9E+	3.5E+	2.6E+	6.9E-01	3.0E+	5.3E-01	1.1E+	5.2E+	2.8E+
5.7	2.7E+	2.4E+	5 3E+	3 1E+	5 5E+	2.5E+	1 0E-00	3 2E+	6 7E-01	1 1E+	5 4E+	3 0E+
5.8	2.7E+	2.6E+	6.0E+	3.3E+	8.7E+	2.5E+	1.6E-00	3.4E+	8 4E-01	9.8E+	5.5E+	3.2E+
5.9	2.7E+	2.8E+	6.9E+	3.5E+	1.3E+	2.4E+	2.3E-00	3.6E+	1.1E+	9.2E+	5.6E+	3.4E+
6.0	2.7E+	3.0E+	8.2E+	3.7E+	2.0E+	2.3E+	3.5E-00	3.8E+	1.3E+	8.6E+	5.8E+	3.6E+
6.1	2.7E+	3.1E+	9.9E+	4.0E+	3.0E+	2.3E+	5.1E-00	4.0E+	1.7E+	8.0E+	5.9E+	3.9E+
6.2	2.8E+	3 3E+	1 2E+	4 2E+	4 2E+	2.2E+	7 5E-00	4 2E+	2.1E+	7 5 E+	6 1E+	4 2E+
6.3	2.8E+	3.5E+	1.6E+	4.4E+	5.8E+	2.2E+	1.1E+	4.5E+	2.7E+	7.0E+	6.2E+	4 4E+
6.4	2.8E+	3 6E+	2.1E+	4 8E+	7 7E+	2.1E+	1.6E+	4 7E+	3 4E+	6 5E+	6 4E+	4 7E+
6.5	2.8E+	3.7E+	2.8E+	5.2E+	9.9E+	2.0E+	2.2E+	5.0E+	4.2E+	6.1E+	6.6E+	5.1E+
6.6	2.8E+	3.9E+	3.9E+	5.7E+	1.2E+	2.0E+	3.0E+	5.4E+	5.3E+	5.7E+	6.7E+	5.4E+

рН	As	Ва	Ве	Cd	Cr (+3)	Cr (+6)	Hg	Ni	Ag	Se	Tl	Zn
6.7	2 9E+	4 0E+	5 5E+	64E+	1 5E+	1 9E+	4 0E+	5.8E+	6.6E+	5 3E+	6 9E+	5.8E+
6.8	2.9E+	4.1E+	7.9E+	7.5E+	1.8E+	1.9E+	5.2E+	6.5E+	8.3E+	5.0E+	7.1E+	6.2E+
6.9	2.9E+	4 2E+	1 1E+	9 1E+	2.1E+	1 8E+	6.6E+	7 4E+	1.0E+	4 7E+	7 3E+	6 8E+
7.0	2.9E+	4.2E+	1.7E+	1.1E+	2.5E+	1.8E+	8.2E+	8.8E+	1.3E+	4.3E+	7.4E+	7.5E+
7 1	2 9E+	4 3E+	2.5E+	1 5E+	2.8E+	1 7E+	9 9E+	1 1E+	1 6E+	4 1E+	7.6E+	8 3E+
7.2	3.0E+	4.4E+	3.8E+	2.0E+	3.1E+	1.7E+	1.2E+	1.4E+	2.0E+	3.8E+	7.8E+	9.5E+
7.3	3.0E+	4.4E+	5.7E+	2.8E+	3.4E+	1.6E+	1.3E+	1.8E+	2.5E+	3.5E+	8.0E+	1.1E+
7.4	3.0E+	4.5E+	8.6E+	4.0E+	3.7E+	1.6E+	1.5E+	2.5E+	3.1E+	3.3E+	8.2E+	1.3E+
7.5	3.0E+	4.6E+	1.3E+	5.9E+	3.9E+	1.6E+	1.6E+	3.5E+	3.9E+	3.1E+	8.5E+	1.6E+
7.6	3.1E+	4.6E+	2.0E+	8.7E+	4.1E+	1.5E+	1.7E+	4.9E+	4.8E+	2.9E+	8.7E+	1.9E+
7.7	3.1E+	4.7E+	3.0E+	1.3E+	4.2E+	1.5E+	1.8E+	7.0E+	5.9E+	2.7E+	8.9E+	2.4E+
7.8	3 1E+	4 9E+	4 6E+	1 9E+	4 3E+	1 4E+	1 9E+	9 9E+	7 3E+	2.5E+	9 1E+	3 1E+
7.9	3.1E+	5.0E+	6.9E+	2.9E+	4.3E+	1.4E+	1.9E+	1.4E+	8.9E+	2.4E+	9.4E+	4 0E+
8.0	3 1E+	5 2E+	1 0E+	4 3E+	4 3E+	1 4E+	2.0E+	1 9E+	1 1E+	2.2E+	9 6E+	5 3E+

Section 742.APPENDIX C: Tier 2 Tables and Illustrations Section 742.TABLE K: Parameter Estimates for Calculating Water-Filled Soil Porosity (θ_{w})

Soil Texture ^a	Saturated Hydraulic Conductivity, K _s (m/yr)	1/(2b+3) ^b
Sand	1,830	0.090
Loamy Sand	540	0.085
Sandy Loam	230	0.080
Silt Loam	120	0.074
Loam	60	0.073
Sandy Clay Loam	40	0.058
Silt Clay Loam	13	0.054
Clay Loam	20	0.050
Sandy Clay	10	0.042
Silt Clay	8	0.042
Clay	5	0.039

The appropriate texture classification is determined by a particle size analysis by ASTM D2488-93 as incorporated by reference in Section 742.210 and the U.S. Department of Agriculture Soil Textural Triangle shown in Appendix C, Illustration C.

Where b is the soil-specific exponential parameter (unitless)

IT IS SO ORDERED.

Section 41 of the Environmental Protection Act (415 ILCS 5/41(1994)) provides for the appeal of final Board opinions and orders to the Illinois Appellate Court within 35 days of the date of service of this order. The Rules of the Supreme Court of Illinois establish filing requirement. (See also 35 Ill.Adm. Code 101.246 "Motions for Reconsideration.")

I, Dorothy M. Gunn, Clerk of the Illinois Pollution Control Board, hereby certify that the above opinion and order was adopted on the 5th day of June, 1997, by a vote of 7-0.

Dorothy M. Gunn, Clerk

Illinois Pollution Control Board